



SMB Plug to BNC Male Cable 24 Inch Length Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C3318-24

Configuration

- Connector 1: SMB Plug
- Connector 2: BNC Male
- Cable Type: RG174

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|---------------|---------|--------------|
| Frequency Range | DC | | 1,000 | MHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 66 | | % |
| Capacitance | | 31.1 [102.03] | | pF/ft [pF/m] |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-------|-------|-------|-------|-------|-------|
| Frequency | 50 | 100 | 250 | 500 | 1,000 | MHz |
| Insertion Loss (Typ.) | 0.284 | 0.368 | 0.474 | 0.623 | 0.84 | dB |

Mechanical Specifications

Cable Assembly

Length* 24 in [609.6 mm]
Diameter 0.57 in [14.48 mm]

Cable

Cable Type RG174
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PE (LD)
Number of Shields 1
Shield Layer 1 Tinned Copper Braid
Jacket Material PVC, Black
Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to BNC Male Cable 24 Inch Length Using RG174 Coax PE3C3318-24](#)



SMB Plug to BNC Male Cable 24 Inch Length Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C3318-24

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|------------------------|------------------|
| Type | SMB Plug | BNC Male |
| Specification | MIL-STD-348A | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Beryllium Copper, Gold | Brass, Gold |
| Contact Plating Specification | 30 µin minimum | 50µ in. minimum |
| Dielectric Type | PTFE | Teflon |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | 100 µin minimum | 100µ in. minimum |
| Coupling Nut Material and Plating | Brass, Nickel | Brass, Nickel |
| Coupling Nut Plating Specification | 100 µin minimum | 100µ in. minimum |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.

Environmental Specifications

Temperature

Operating Range -40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to BNC Male Cable 24 Inch Length Using RG174 Coax PE3C3318-24](#)



SMB Plug to BNC Male Cable 24 Inch Length Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C3318-24

How to Order

Part Number Configuration:

PE3C3318

- **xx**

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3C3318-12 = 12 inches long cable
PE3C3318-100cm = 100 cm long cable


SMB Plug to BNC Male Cable 24 Inch Length Using RG174 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to BNC Male Cable 24 Inch Length Using RG174 Coax PE3C3318-24](https://www.pasternack.com/smb-plug-bnc-male-rg174au-cable-assembly-pe3c3318-24-p.aspx)

URL: <https://www.pasternack.com/smb-plug-bnc-male-rg174au-cable-assembly-pe3c3318-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3318-24 CAD Drawing
 SMB Plug to BNC Male Cable 24 Inch Length Using RG174 Coax

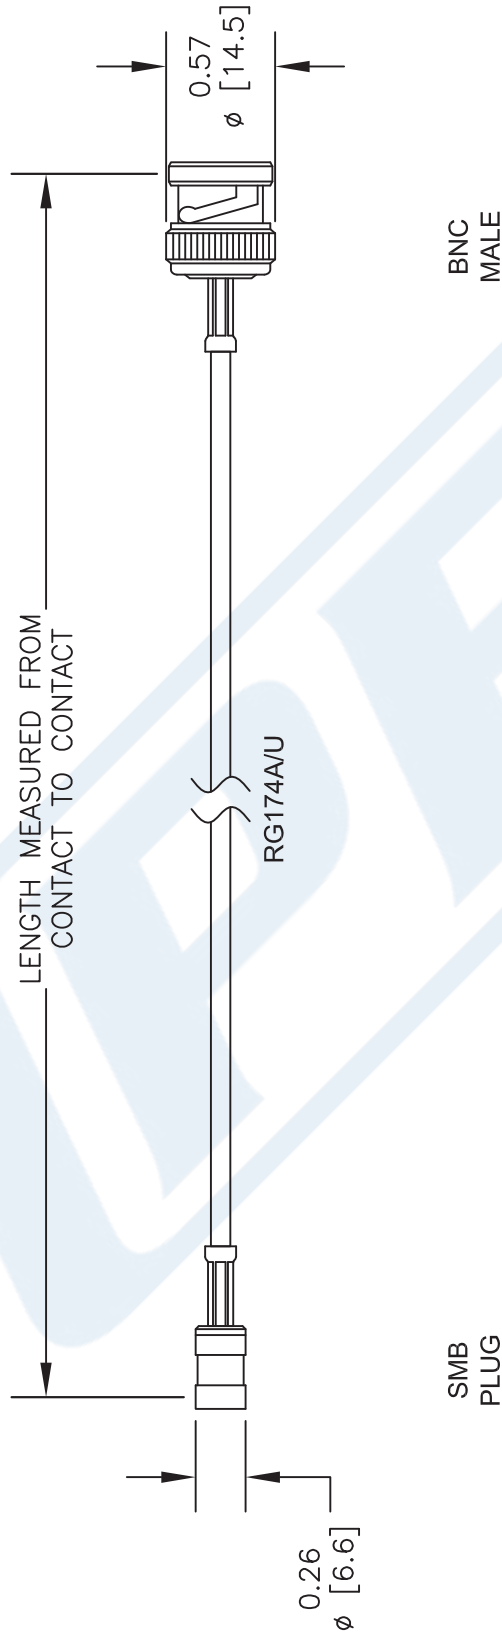

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

| | | | | | | | | | |
|-----------|--|-----------|--|----------|--|-------|--|------|--|
| DWG TITLE | | CAGE CODE | | CAD FILE | | SCALE | | SIZE | |
| PE3C3318 | | 53919 | | 111816 | | N/A | | A | |

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com