



SMB Plug to BNC Male Cable 72 Inch Length Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C3318-72

**Configuration**

- Connector 1: SMB Plug
- Connector 2: BNC Male
- Cable Type: RG174

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		31.1 [102.03]		pF/ft [pF/m]

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.452	0.704	1.022	1.47	2.12	dB

**Mechanical Specifications**

**Cable Assembly**

Length\* 72 in [182.88 cm]  
Diameter 0.57 in [14.48 mm]

**Cable**

Cable Type RG174  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PE (LD)  
Number of Shields 1  
Shield Layer 1 Tinned Copper Braid  
Jacket Material PVC, Black  
Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to BNC Male Cable 72 Inch Length Using RG174 Coax PE3C3318-72](#)



SMB Plug to BNC Male Cable 72 Inch Length Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C3318-72

**Connectors**

Description	Connector 1	Connector 2
Type	SMB Plug	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	50µ in. minimum
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100µ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100µ in. minimum

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.

**Environmental Specifications**

**Temperature**

Operating Range -40 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to BNC Male Cable 72 Inch Length Using RG174 Coax PE3C3318-72](#)



SMB Plug to BNC Male Cable 72 Inch Length Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C3318-72

**How to Order**

Part Number Configuration:

**PE3C3318**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C3318-12 = 12 inches long cable  
PE3C3318-100cm = 100 cm long cable


SMB Plug to BNC Male Cable 72 Inch Length Using RG174 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMB Plug to BNC Male Cable 72 Inch Length Using RG174 Coax PE3C3318-72](https://www.pasternack.com/smb-plug-to-bnc-male-rg174-coax-cable-assembly-pe3c3318-72)

URL: <https://www.pasternack.com/smb-plug-bnc-male-rg174au-cable-assembly-pe3c3318-72-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3C3318-72 CAD Drawing**  
 SMB Plug to BNC Male Cable 72 Inch Length Using RG174 Coax

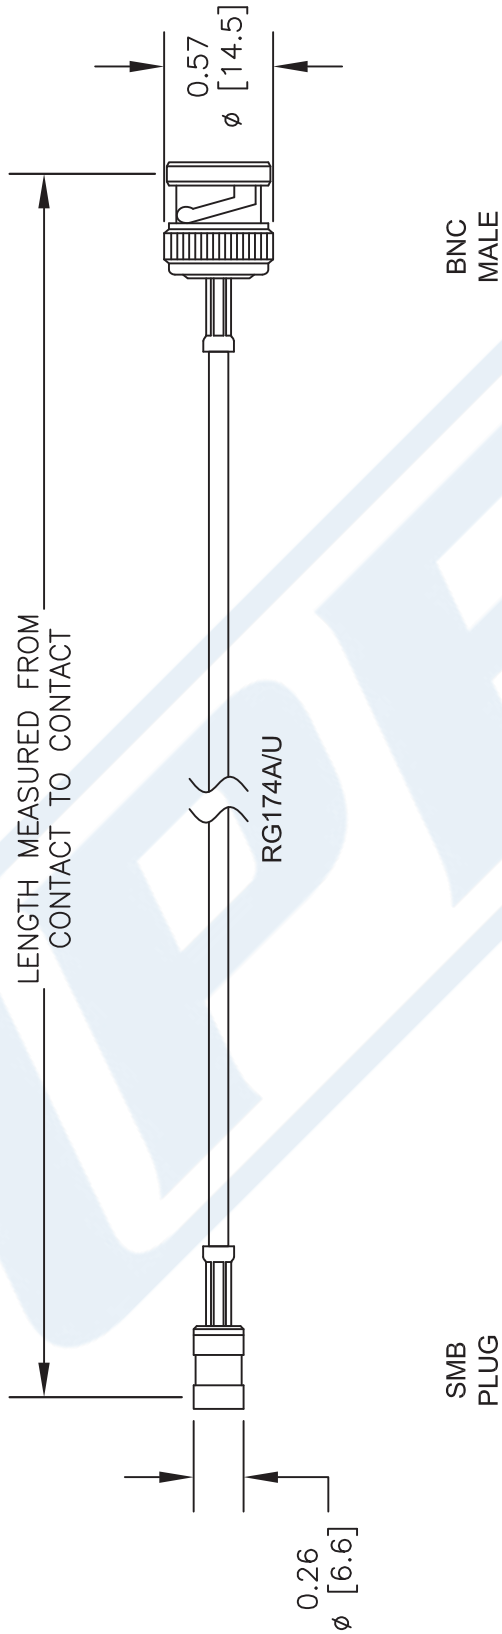

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE3C3318**

CAGE CODE **53919**

CAD FILE 111816 SCALE N/A SIZE A 2233

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com