

## 50 Ohm MMCX Plug Right Angle to 75 Ohm BNC Female Bulkhead Cable Using 75 Ohm RG179 Coax



### PE3C3914

#### Configuration

- Connector 1: MMCX Plug Right Angle
- Connector 2: BNC Female Bulkhead
- Cable Type: RG179
- Coax Flex Type: Flexible

#### Features

- Max Frequency 1 GHz
- 70% Phase Velocity
- FEP Jacket

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C3914 50 ohm MMCX plug right angle to 75 ohm BNC female bulkhead cable using 75 ohm RG179 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MMCX to BNC cable assembly has a plug to female gender configuration with 75 ohm flexible RG179 coax. The PE3C3914 MMCX plug to BNC female cable assembly operates to 1 GHz. The right angle MMCX interface on the RG179 cable allows for easier connections in tight spaces. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation	70			%
Capacitance	19.4 [63.65]			pF/ft [pF/m]
Operating Voltage (AC)			250	Vrms

#### Specifications by Frequency

## 50 Ohm MMCX Plug Right Angle to 75 Ohm BNC Female Bulkhead Cable Using 75 Ohm RG179 Coax



### PE3C3914

Part Number	Length	Description	F1	F2	F3	F4	Units MHz	Weight (lbs)
		Frequency	100	250	500	1000		
PE3C3914	Custom Lengths Available	Insertion Loss (Typ.)	0.09	0.14	0.203	0.3	dB/ft	
			0.3	0.45	0.67	0.99	dB/m	
PE3C3914-12	12 inch	Insertion Loss (Typ.)	0.39	0.44	0.51	0.6	dB	0.057
PE3C3914-24	24 inch	Insertion Loss (Typ.)	0.48	0.58	0.71	0.9	dB	0.066
PE3C3914-36	36 inch	Insertion Loss (Typ.)	0.57	0.72	0.91	1.2	dB	0.075
PE3C3914-48	48 inch	Insertion Loss (Typ.)	0.66	0.85	1.12	1.5	dB	0.084
PE3C3914-72	72 inch	Insertion Loss (Typ.)	0.84	1.13	1.52	2.1	dB	0.102

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
Loss due to Connector 2: 0.2 dB  
Base Weight: 0.057 pounds  
Additional Weight per Inch: 0.00075 pounds

### Mechanical Specifications

#### Cable Assembly

Weight 0.057 lbs [25.85 g]

#### Cable

Cable Type RG179  
Impedance 75 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper Clad Steel, Silver  
Dielectric Type PTFE  
Number of Shields 1  
Shield Layer 1 Silver Plated Copper Braid  
Jacket Material FEP, Tan  
Jacket Diameter 0.1 in [2.54 mm]  
Repeated Minimum Bend Radius 0.4 in [10.16 mm]

### Connectors

Description	Connector 1	Connector 2
Type	MMCX Plug Right Angle	BNC Female Bulkhead
Specification	BS EN 122340	
Impedance	50 Ohms	75 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 $\mu$ in minimum	30 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification	3 $\mu$ in minimum	100 $\mu$ in minimum

## 50 Ohm MMCX Plug Right Angle to 75 Ohm BNC Female Bulkhead Cable Using 75 Ohm RG179 Coax



### PE3C3914

#### Environmental Specifications

Operating Range Temperature -55 to +155 deg C

#### Compliance Certifications (see [product page](#) for current document)


#### Plotted and Other Data

Notes:

#### Typical Performance Data

#### How to Order

Part Number Configuration:

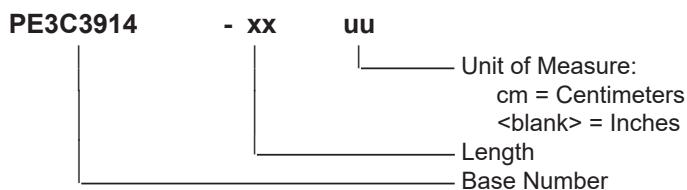

Example: PE3C3914-12 = 12 inches long cable  
PE3C3914-100cm = 100 cm long cable

50 Ohm MMCX Plug Right Angle to 75 Ohm BNC Female Bulkhead Cable Using 75 Ohm RG179 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm MMCX Plug Right Angle to 75 Ohm BNC Female Bulkhead Cable Using 75 Ohm RG179 Coax PE3C3914](#)

URL: <https://www.pasternack.com/50-ohm-mmcx-plug-right-angle-to-75-ohm-bnc-female-bulkhead-cable-using-rg179-pe3c3914-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C3914 CAD Drawing

50 Ohm MMCX Plug Right Angle to 75 Ohm BNC Female Bulkhead Cable Using 75 Ohm RG179 Coax

