



Snap-On MMBX Plug Right Angle to N Female
Bulkhead Cable 6 Inch Length Using RG178 Coax

RF Cable Assemblies Technical Data Sheet

PE3C3994-6

Configuration

- Connector 1: Snap-On MMBX Plug Right Angle
- Connector 2: N Female Bulkhead
- Cable Type: RG178

Features

- Max. Operating Frequency of 3 GHz
- Snap-On mating

Applications

- General Purpose Test
- PCB Probing
- PCB Testing
- PCB-to-Panel

Description

Pasternack's MMBX cable assemblies are part of our full line of RF components available for same-day shipping. These MMBX cable assemblies are designed to connect MMBX system components or test connections, delivering signal frequencies as high as 3 GHz. Our family of MMBX cables can also be used to connect from PCB to panel, offering between series MMBX options with SMA Bulkhead, TNC Bulkhead and N Bulkhead assembly configurations. If none of our standard options fit your application, you can specify your own custom MMBX cable assembly using Pasternack's online Cable Creator.

Our MMBX cable assembly datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave cable assemblies allow designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right cable assemblies for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Return Loss		-15.563		dB
Insertion Loss			0.6	dB
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On MMBX Plug Right Angle to N Female Bulkhead Cable 6 Inch Length Using RG178 Coax PE3C3994-6](#)



Snap-On MMBX Plug Right Angle to N Female
Bulkhead Cable 6 Inch Length Using RG178 Coax

RF Cable Assemblies Technical Data Sheet

PE3C3994-6

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.27	0.31	0.36	0.43	0.6	dB

Mechanical Specifications

Cable Assembly

Length*

6 in [152.4 mm]

Cable

Cable Type

RG178

Impedance

50 Ohms

Inner Conductor Type

Stranded

Inner Conductor Material and Plating

Copper Clad Steel, Silver

Dielectric Type

PTFE

Number of Shields

1

Shield Layer 1

Silver Plated Copper Braid

Jacket Material

FEP, Tan

Jacket Diameter

0.072 in [1.83 mm]

Repeated Minimum Bend Radius

0.4 in [10.16 mm]

Connectors

Description	Connector 1	Connector 2
Type	MMBX Plug Right Angle	N Female Bulkhead
Impedance	50 Ohms	50 Ohms
Connection Method	Snap-On	
Mating Cycles	100	
Contact Material and Plating	Beryllium Copper, Gold	
Dielectric Type	PTFE	
Outer Conductor Material and Plating	Brass, Gold	
Body Material and Plating	Brass, Gold	Brass, Nickel

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On MMBX Plug Right Angle to N Female Bulkhead Cable 6 Inch Length Using RG178 Coax PE3C3994-6](#)



Snap-On MMBX Plug Right Angle to N Female
Bulkhead Cable 6 Inch Length Using RG178 Coax

RF Cable Assemblies Technical Data Sheet

PE3C3994-6

Environmental Specifications

Temperature

Operating Range

-55 to +155 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

How to Order

Part Number Configuration:

PE3C3994

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C3994-12 = 12 inches long cable
PE3C3994-100cm = 100 cm long cable

Snap-On MMBX Plug Right Angle to N Female Bulkhead Cable 6 Inch Length Using RG178 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On MMBX Plug Right Angle to N Female Bulkhead Cable 6 Inch Length Using RG178 Coax PE3C3994-6](#)

URL: <https://www.pasternack.com/mmbx-plug-n-female-rg178bu-cable-assembly-pe3c3994-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3994-6 CAD Drawing

Snap-On MMBX Plug Right Angle to N Female Bulkhead
Cable 6 Inch Length Using RG178 Coax

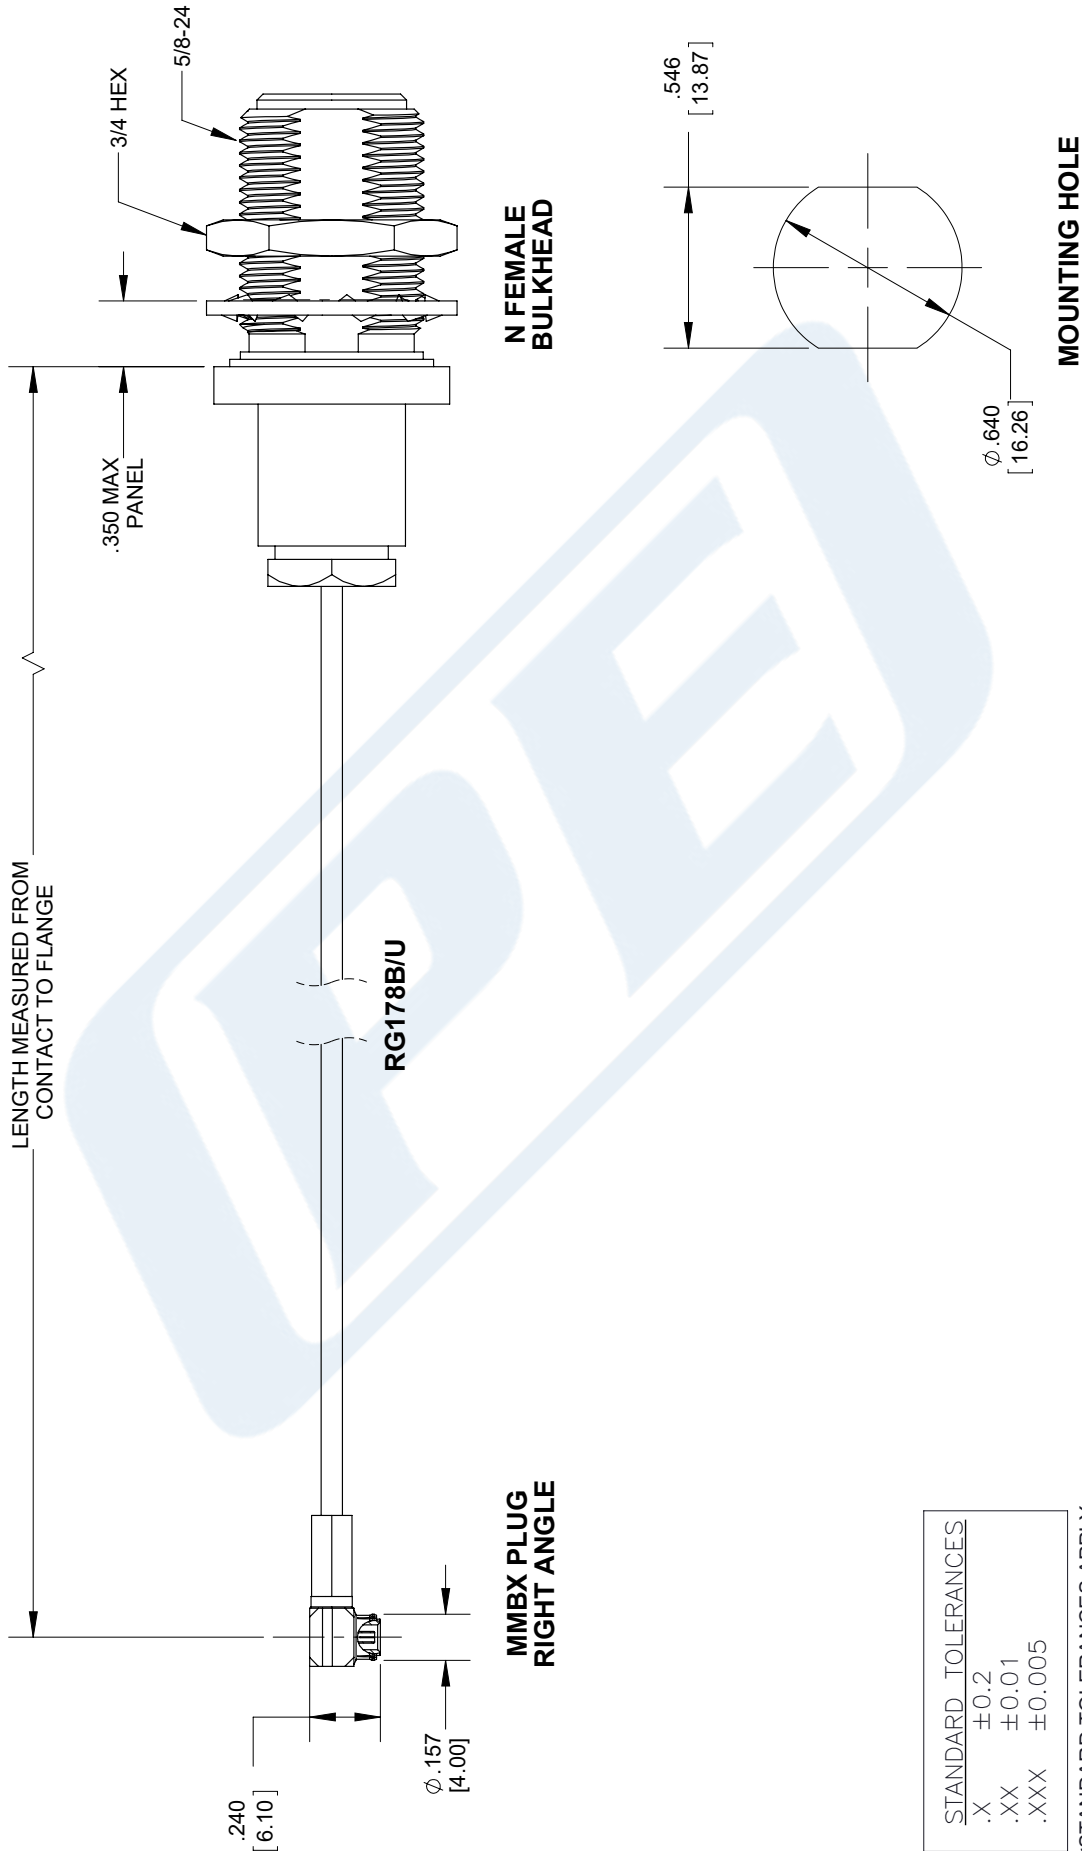

DWG TITLE
PE3C3994

CAGE CODE 53919

CAD FILE 052217

SCALE N/A

SIZE A

9999

PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com