



## SSMC Plug Right Angle to TNC Male Low Loss Cable 60 Inch Length Using LMR-100 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C4435-60

#### Configuration

- Connector 1: SSMC Plug Right Angle
- Connector 2: TNC Male
- Cable Type: LMR-100A

#### Features

- SSMC Cable Assembly Max. Operating Frequency of 500 MHz
- Small SSMC cable connection form factor (50% smaller than SMA, radially)
- Reliable threaded coupling
- In stock and ready to ship

#### Applications

- SSMC Cable General Purpose Test
- Data Acquisition Systems
- A/D Conversion Systems
- Ultra Wideband Digital Receivers
- Software defined radio (SDR)

#### Description

Pasternack's SSMC cable assemblies are part of our full line of RF components available for same-day shipping. These SSMC cable assemblies are designed to connect SSMC system components and test connections, delivering signal frequencies as high as 12.4 GHz. Our family of SSMC cables can also be used to connect SSMC ports on data acquisition systems, A/D modules or SSMC coax patch panels. If none of our standard options fit your application, you can specify your own custom SSMC cable assembly using Pasternack's online Cable Creator.

Our SSMC cable assembly datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave cable assemblies allow designers to configure and customize their signal connections however they like. Whether the need is to provide SSMC cabling for a data acquisition system, or simply create a custom cable assembly configuration, Pasternack has the right cable assemblies for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same day.

#### Electrical Specifications

| Description                   | Minimum | Typical       | Maximum | Units                            |
|-------------------------------|---------|---------------|---------|----------------------------------|
| Frequency Range               | DC      |               | 500     | MHz                              |
| VSWR                          |         |               | 1.5:1   |                                  |
| Velocity of Propagation       |         | 66            |         | %                                |
| RF Shielding                  | 90      |               |         | dB                               |
| Group Delay                   |         | 1.54 [5.05]   |         | ns/ft [ns/m]                     |
| Capacitance                   |         | 30.8 [101.05] |         | pF/ft [pF/m]                     |
| Inductance                    |         | 0.077 [0.25]  |         | uH/ft [uH/m]                     |
| DC Resistance Inner Conductor |         | 81 [265.75]   |         | $\Omega$ /1000ft [ $\Omega$ /Km] |
| DC Resistance Outer Conductor |         | 9.5 [31.17]   |         | $\Omega$ /1000ft [ $\Omega$ /Km] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug Right Angle to TNC Male Low Loss Cable 60 Inch Length Using LMR-100 Coax PE3C4435-60](#)



## SSMC Plug Right Angle to TNC Male Low Loss Cable 60 Inch Length Using LMR-100 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3C4435-60**

Jacket Spark 2,000 Vrms

#### Specifications by Frequency

| Description           | F1   | F2   | F3   | F4   | F5 | Units |
|-----------------------|------|------|------|------|----|-------|
| Frequency             | 50   | 150  | 220  | 500  |    | MHz   |
| Insertion Loss (Typ.) | 0.46 | 0.65 | 0.75 | 1.05 |    | dB    |

#### Mechanical Specifications

##### Cable Assembly

Length\* 60 in [152.4 cm]  
Diameter 0.591 in [15.01 mm]

##### Cable

Cable Type LMR-100A  
Impedance 50 Ohms  
Inner Conductor Type Solid  
Inner Conductor Material and Plating Copper Clad Steel  
Dielectric Type PE  
Number of Shields 2  
Shield Layer 1 Aluminum Tape  
Shield Layer 2 Tinned Copper Braid  
Jacket Material PVC, Black  
Jacket Diameter 0.11 in [2.79 mm]  
  
One Time Minimum Bend Radius 0.25 in [6.35 mm]  
Repeated Minimum Bend Radius 1 in [25.4 mm]  
Bending Moment 0.1 lbs-ft [0.14 N-m]  
Flat Plate Crush 10 lbs/in [0.18 Kg/mm]  
Tensile Strength 15 lbs [6.8 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug Right Angle to TNC Male Low Loss Cable 60 Inch Length Using LMR-100 Coax PE3C4435-60](#)



SSMC Plug Right Angle to TNC Male Low Loss  
Cable 60 Inch Length Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3C4435-60

**Connectors**

| Description                        | Connector 1            | Connector 2     |
|------------------------------------|------------------------|-----------------|
| Type                               | SSMC Plug Right Angle  | TNC Male        |
| Specification                      |                        | MIL-STD-348A    |
| Impedance                          | 50 Ohms                | 50 Ohms         |
| Mating Cycles                      | 500                    |                 |
| Contact Material and Plating       | Beryllium Copper, Gold | Brass, Gold     |
| Contact Plating Specification      | MIL-G-45204            | 30 µin minimum  |
| Dielectric Type                    | Teflon                 | PTFE            |
| Body Material and Plating          | Brass, Gold            | Brass, Nickel   |
| Body Plating Specification         | MIL-G-45204            | 100 µin minimum |
| Coupling Nut Material and Plating  | Beryllium Copper, Gold | Brass, Nickel   |
| Coupling Nut Plating Specification | MIL-G-45204            | 100 µin minimum |
| Torque                             | 1.75 in-lbs [0.2 Nm]   |                 |

**Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8$ ", whichever is greater.

**Environmental Specifications**

**Temperature**

Operating Range

-40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug Right Angle to TNC Male Low Loss Cable 60 Inch Length Using LMR-100 Coax PE3C4435-60](#)



## SSMC Plug Right Angle to TNC Male Low Loss Cable 60 Inch Length Using LMR-100 Coax

### RF Cable Assemblies Technical Data Sheet

PE3C4435-60

#### How to Order

Part Number Configuration:

**PE3C4435**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C4435-12 = 12 inches long cable  
PE3C4435-100cm = 100 cm long cable


SSMC Plug Right Angle to TNC Male Low Loss Cable 60 Inch Length Using LMR-100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug Right Angle to TNC Male Low Loss Cable 60 Inch Length Using LMR-100 Coax PE3C4435-60](https://www.pasternack.com/ssmc-plug-tnc-male-lmr100-cable-assembly-pe3c4435-60-p.aspx)

URL: <https://www.pasternack.com/ssmc-plug-tnc-male-lmr100-cable-assembly-pe3c4435-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C4435-60 CAD Drawing  
SSMC Plug Right Angle to TNC Male Low Loss Cable  
60 Inch Length Using LMR-100 Coax

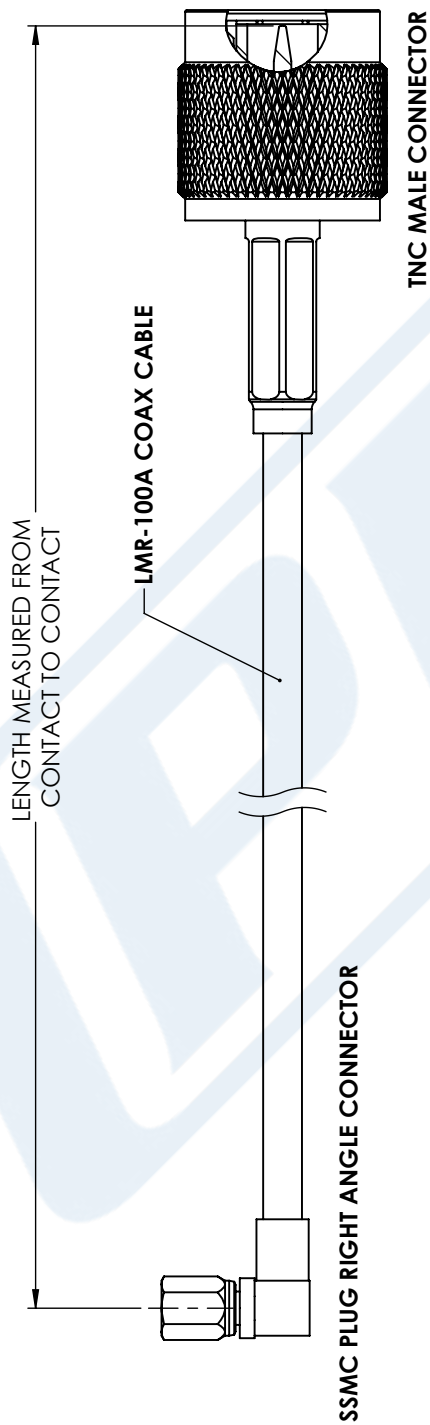

| STANDARD TOLERANCES |
|---------------------|
| .X ±0.2             |
| .XX ±0.01           |
| .XXX ±0.005         |

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



**PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** [www.pasternack.com](http://www.pasternack.com) | **E-Mail:** [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE  
PE3C4435

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

|                 |                   |           |        |        |
|-----------------|-------------------|-----------|--------|--------|
| CAGE CODE 53919 | CAD FILE 09/05/17 | SCALE N/A | SIZE A | CN2245 |
|-----------------|-------------------|-----------|--------|--------|