

75 Ohm F Male to 75 Ohm F Female Bulkhead Cable Using 75 Ohm RG179 Coax , LF Solder



RF Cable Assemblies Technical Data Sheet

PE3C5570LF

Configuration

- Connector 1: F Male
- Connector 2: F Female Bulkhead
- Cable Type: RG179

Features

- Max Frequency 1 GHz
- FEP Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C5570LF 75 ohm type F male to 75 ohm type F female bulkhead cable using 75 ohm RG179 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type F to type F cable assembly has a male to female gender configuration with 75 ohm flexible RG179 coax. The PE3C5570LF type F male to type F female cable assembly operates to 1 GHz. Our RF cable assembly with type F bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.35:1	
Capacitance		23 [75.46]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Diameter 0.509 in [12.93 mm]

Weight 0.127 lbs [57.61 g]

Cable

Cable Type RG179
Impedance 75 Ohms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to 75 Ohm F Female Bulkhead Cable Using 75 Ohm RG179 Coax , LF Solder PE3C5570LF](#)



75 Ohm F Male to 75 Ohm F Female Bulkhead Cable Using 75 Ohm RG179 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C5570LF

Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.1 in [2.54 mm]

Connectors

Description	Connector 1	Connector 2
Type	F Male	F Female Bulkhead
Impedance	75 Ohms	75 Ohms
Contact Material and Plating	Brass, Gold	Phosphor Bronze, Gold
Contact Plating Specification		30µ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100µ in. minimum	100µ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100µ in. minimum	
Hex Size	7/16 in	
Torque	15 in-lbs [1.7 Nm]	

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to 75 Ohm F Female Bulkhead Cable Using 75 Ohm RG179 Coax , LF Solder PE3C5570LF](#)

75 Ohm F Male to 75 Ohm F Female Bulkhead Cable Using 75 Ohm RG179 Coax , LF Solder




RF Cable Assemblies Technical Data Sheet

PE3C5570LF

How to Order

Part Number Configuration:

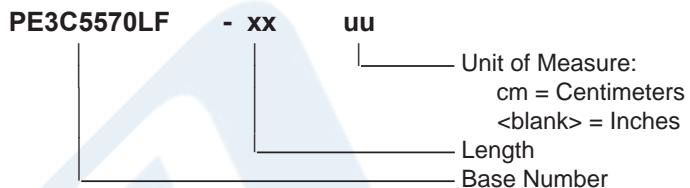

Example: PE3C5570LF-12 = 12 inches long cable
 PE3C5570LF-100cm = 100 cm long cable

75 Ohm F Male to 75 Ohm F Female Bulkhead Cable Using 75 Ohm RG179 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to 75 Ohm F Female Bulkhead Cable Using 75 Ohm RG179 Coax , LF Solder PE3C5570LF](#)


URL: <https://www.pasternack.com/f-male-f-female-rg179bu-cable-assembly-pe3c5570lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C5570LF CAD Drawing


75 Ohm F Male to 75 Ohm F Female Bulkhead Cable

Using 75 Ohm RG179 Coax , LF Solder

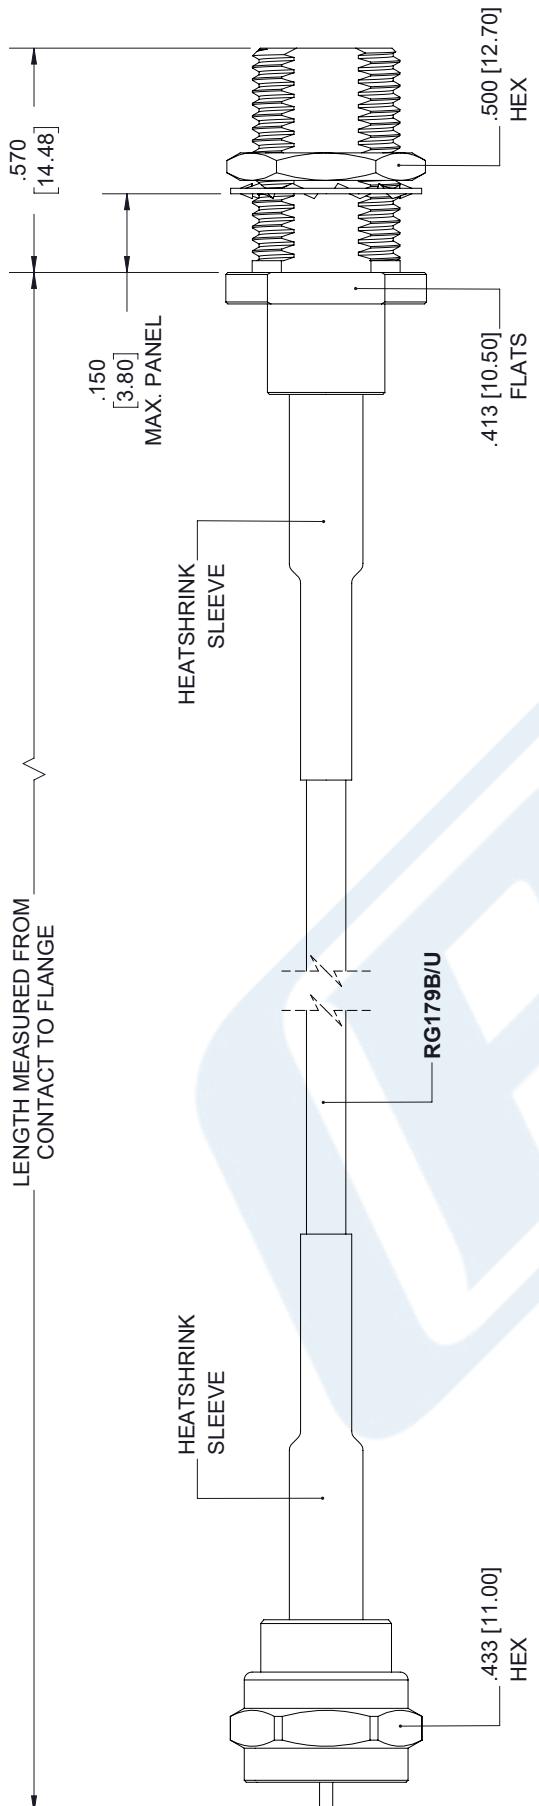

F STRAIGHT MALE

F FEMALE BULKHEAD

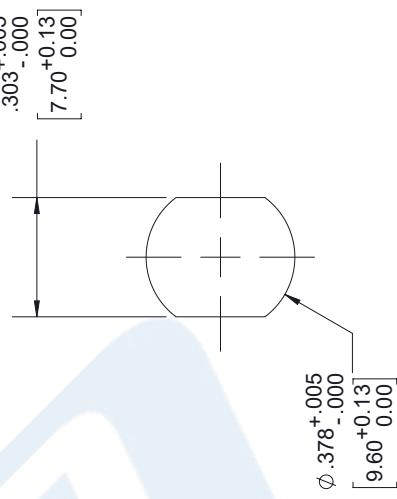

Mounting Hole

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	PE3C5570LF	SCALE N/A	SIZE A
CAGE CODE	53919	CAD FILE 07/19/18	7361

STANDARD TOLERANCES		
X	±0.2	
.XX	±0.01	
.XXX	±0.005	

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

PE PASTERNACK[®]
THE ENGINEER'S RESOURCE
Pasterнак Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasterнак.com | E-Mail: sales@pasterнак.com