

Plenum QMA Male Right Angle to QMA Male Right Angle Low PIM Cable 50 cm Length Using SPP-250-LLPL Coax , LF Solder




PE3C5877-50CM

Configuration

- Connector 1: QMA Male Right Angle
- Connector 2: QMA Male Right Angle
- Cable Type: SPP-250-LLPL
- Coax Flex Type: Corrugated

Features

- Max Frequency 5.8 GHz
- Low PIM: -145 dBc Max
- Shielding Effectivity > 100 dB
- 76% Phase Velocity
- FEP Jacket
- 100% Tested with PIM Test Results Marked on Cable
- UL910 Plenum Rated Cable
- Lightweight and Extremely Flexible
- Low Loss with Excellent VSWR
- IP67 (when mated)

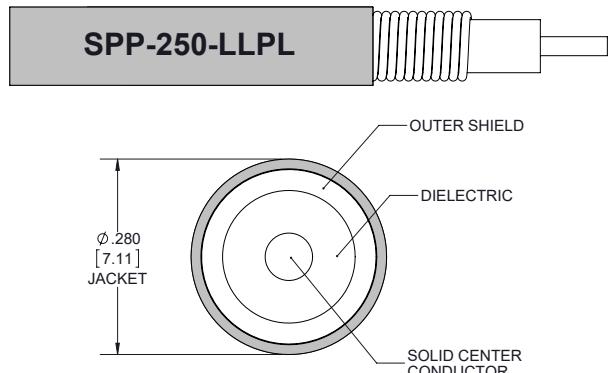

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- Plenum Installations
- Multi-Carrier Communication Systems
- PIM Testing

Description

Pasternack's PE3C5877-50CM QMA male right angle to QMA male right angle 50 cm cable using SPP-250-LLPL coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack QMA to QMA cable assembly has a male to male gender configuration with 50 ohm corrugated SPP-250-LLPL coax. The PE3C5877-50CM QMA male to QMA male cable assembly operates to 5.8 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -145 dBc. The right angle QMA interfaces on the SPP-250-LLPL cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	100			dB

Plenum QMA Male Right Angle to QMA Male
 Right Angle Low PIM Cable 50 cm Length
 Using SPP-250-LLPL Coax , LF Solder



PE3C5877-50CM

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Passive Intermodulation			-145	dBc
IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz				
Capacitance	27 [88.58]			pF/ft [pF/m]
Inductance	0.067 [0.22]			uH/ft [uH/m]
DC Resistance Inner Conductor	3 [9.84]			Ohms/1000ft [Ohms/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.45	0.7	1	2.5	5.8	GHz
Insertion Loss (Max.)	0.12	0.15	0.18	0.29	0.44	dB

Electrical Specification Notes:

The insertion loss data above is based on the performance specifications of the coax cable used in this assembly. The insertion loss includes an estimated insertion loss of $0.04 * \text{SQRT}(F\text{GHz})$ dB maximum per connector.

Mechanical Specifications

Cable Assembly

Weight 0.17 lbs [77.11 g]

Cable

Cable Type	SPP-250-LLPL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor 1 Material and Plating	Copper
Jacket Material	FEP, Blue
Jacket Diameter	0.28 in [7.11 mm]
One Time Minimum Bend Radius	1.25 in [31.75 mm]
Bending Moment	0.8 lbs-ft [1.08 N-m]

Plenum QMA Male Right Angle to QMA Male
 Right Angle Low PIM Cable 50 cm Length
 Using SPP-250-LLPL Coax , LF Solder



PE3C5877-50CM

Connectors

Description	Connector 1	Connector 2
Type	QMA Male Right Angle	QMA Male Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Brass, Silver	Brass, Silver
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Phosphor Bronze, Tri-Metal	Phosphor Bronze, Tri-Metal
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Plenum QMA Male Right Angle to QMA Male
Right Angle Low PIM Cable 50 cm Length
Using SPP-250-LLPL Coax , LF Solder



PE3C5877-50CM

Typical Performance Data




Plenum QMA Male Right Angle to QMA Male
Right Angle Low PIM Cable 50 cm Length
Using SPP-250-LLPL Coax , LF Solder



PE3C5877-50CM

How to Order

Part Number Configuration:

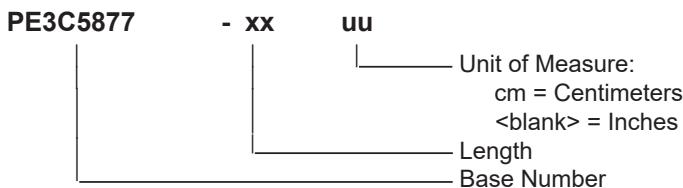

Example: PE3C5877-12 = 12 inches long cable
PE3C5877-100cm = 100 cm long cable

Plenum QMA Male Right Angle to QMA Male Right Angle Low PIM Cable 50 cm Length Using SPP-250-LLPL Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum QMA Male Right Angle to QMA Male Right Angle Low PIM Cable 50 cm Length Using SPP-250-LLPL Coax , LF Solder PE3C5877-50CM](#)

URL: <https://www.pasternack.com/qma-male-qma-male-spp250llpl-cable-assembly-pe3c5877-50cm-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C5877-50CM CAD Drawing

Plenum QMA Male Right Angle to QMA Male Right Angle Low PIM Cable
50 cm Length Using SPP-250-LLPL Coax , LF Solder

