

MMCX Plug Right Angle to SMB Jack
Bulkhead Cable Using RG316 Coax



RF Cable Assemblies Technical Data Sheet

PE3C6024

Configuration

- Connector 1: MMCX Plug Right Angle
- Connector 2: SMB Jack Bulkhead
- Cable Type: RG316

Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C6024 MMCX plug right angle to SMB jack bulkhead cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MMCX to SMB cable assembly has a plug to jack gender configuration with 50 ohm flexible RG316 coax. The PE3C6024 MMCX plug to SMB jack cable assembly operates to 3 GHz. The right angle MMCX interface on the RG316 cable allows for easier connections in tight spaces. Our RF cable assembly with SMB bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

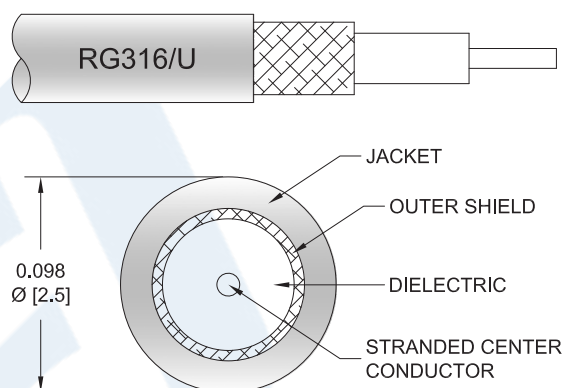

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug Right Angle to SMB Jack Bulkhead Cable Using RG316 Coax PE3C6024](#)



MMCX Plug Right Angle to SMB Jack
Bulkhead Cable Using RG316 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6024

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			250	Vrms
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.11	0.16	0.238	0.38	0.58	dB/ft
	0.36	0.52	0.78	1.25	1.9	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Weight 0.022 lbs [9.98 g]

Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug Right Angle to SMB Jack Bulkhead Cable Using RG316 Coax PE3C6024](#)



MMCX Plug Right Angle to SMB Jack Bulkhead Cable Using RG316 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6024

Connectors

Description	Connector 1	Connector 2
Type	MMCX Plug Right Angle	SMB Jack Bulkhead
Specification	BS EN 122340	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification	3 µin minimum	100 µin minimum

Environmental Specifications

Temperature

Operating Range

-55 to +155 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug Right Angle to SMB Jack Bulkhead Cable Using RG316 Coax PE3C6024](#)



MMCX Plug Right Angle to SMB Jack Bulkhead Cable Using RG316 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6024

How to Order

Part Number Configuration:

PE3C6024

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C6024-12 = 12 inches long cable
PE3C6024-100cm = 100 cm long cable

MMCX Plug Right Angle to SMB Jack Bulkhead Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug Right Angle to SMB Jack Bulkhead Cable Using RG316 Coax PE3C6024](https://www.pasternack.com/mmcx-plug-right-angle-to-smb-jack-bulkhead-cable-using-rg316-pe3c6024-p.aspx)

URL: <https://www.pasternack.com/mmcx-plug-right-angle-to-smb-jack-bulkhead-cable-using-rg316-pe3c6024-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

