

Trimmed Lead to SMA Male Cable Using RG316 Coax with HeatShrink




PE3C6040/HS

Configuration

- Connector 1: Trimmed Lead
- Connector 2: SMA Male
- Cable Type: RG316
- Coax Flex Type: Flexible

Features

- 69% Phase Velocity
- FEP Jacket

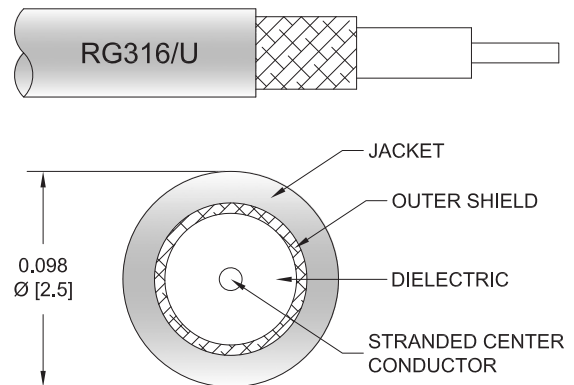

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C6040/HS trimmed lead to 50 ohm SMA male cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		69		%
Jacket Spark			2,000	Vrms

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.012 lbs [5.44 g]

Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid

Trimmed Lead to SMA Male Cable Using
RG316 Coax with HeatShrink



PE3C6040/HS

Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

Connectors

Description	Connector 1	Connector 2
Type	Trimmed Lead	SMA Male
Specification		MIL-STD-348A
Impedance	0 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating		Brass, Gold
Contact Plating Specification		30 µin minimum
Dielectric Type		PTFE
Body Material and Plating		Brass, Nickel
Body Plating Specification		100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum
Hex Size		5/16 inch
Torque		3 in-lbs 0.34 Nm

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Trimmed Lead to SMA Male Cable Using RG316 Coax with HeatShrink



PE3C6040/HS

Typical Performance Data

How to Order

Part Number Configuration:

PE3C6040/HS

- xx

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3C6040/HS-12 = 12 inches long cable
PE3C6040/HS-100cm = 100 cm long cable

Trimmed Lead to SMA Male Cable Using RG316 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Trimmed Lead to SMA Male Cable Using RG316 Coax with HeatShrink PE3C6040/HS](https://www.pasternack.com/trimmed-lead-to-sma-male-cable-using-rg316-with-heatshrink-pe3c6040-hs-p.aspx)

URL: <https://www.pasternack.com/trimmed-lead-to-sma-male-cable-using-rg316-with-heatshrink-pe3c6040-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C6040/HS CAD Drawing

Trimmed Lead to SMA Male Cable Using RG316 Coax with HeatShrink

