

N Male Right Angle to SMA Male Right Angle Cable Using PE-P086 Coax




RF Cable Assemblies Technical Data Sheet

PE3C6297


Configuration

- Connector 1: N Male Right Angle
- Connector 2: SMA Male Right Angle
- Cable Type: PE-P086



Features

- Shielding Effectivity > 110 dB
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

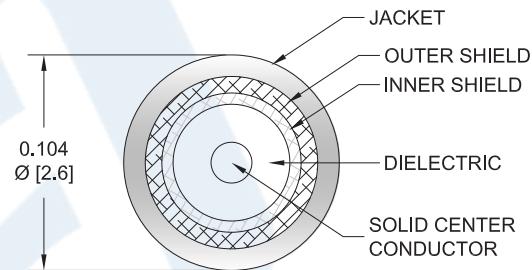

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C6297 type N male right angle to SMA male right angle cable using PE-P086 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to SMA cable assembly has a male to male gender configuration with 50 ohm flexible PE-P086 coax. The right angle type N and right angle SMA interfaces on the PE-P086 cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 110 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
RF Shielding	110			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Weight 0.096 lbs [43.54 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to SMA Male Right Angle Cable Using PE-P086 Coax PE3C6297](#)



N Male Right Angle to SMA Male Right Angle Cable Using PE-P086 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6297

Cable

Cable Type	PE-P086
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Tape
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Blue
Jacket Diameter	0.104 in [2.64 mm]

Repeated Minimum Bend Radius

0.5 in [12.7 mm]

Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle	SMA Male Right Angle
Specification	MIL-STD-348	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Brass, Gold over Nickel
Contact Plating Specification	MIL-G-45204	0.2 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold over Nickel
Body Plating Specification	MIL-G-45204	0.1 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Passivated Stainless Steel
Coupling Nut Plating Specification	QQ-N-290	
Hex Size		16-May inch
Torque		8 in-lbs [0.9 Nm]

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications

(see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to SMA Male Right Angle Cable Using PE-P086 Coax PE3C6297](#)



N Male Right Angle to SMA Male Right Angle Cable Using PE-P086 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6297

How to Order

Part Number Configuration:

PE3C6297

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C6297-12 = 12 inches long cable
PE3C6297-100cm = 100 cm long cable

N Male Right Angle to SMA Male Right Angle Cable Using PE-P086 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to SMA Male Right Angle Cable Using PE-P086 Coax PE3C6297](#)


URL: <https://www.pasternack.com/n-male-right-angle-to-sma-male-cable-using-pe-p086-pe3c6297-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C6297 CAD Drawing

N Male Right Angle to SMA Male Right Angle Cable Using PE-P086 Coax

A INITIAL RELEASE U 112012U23 U21NN AGANWANI

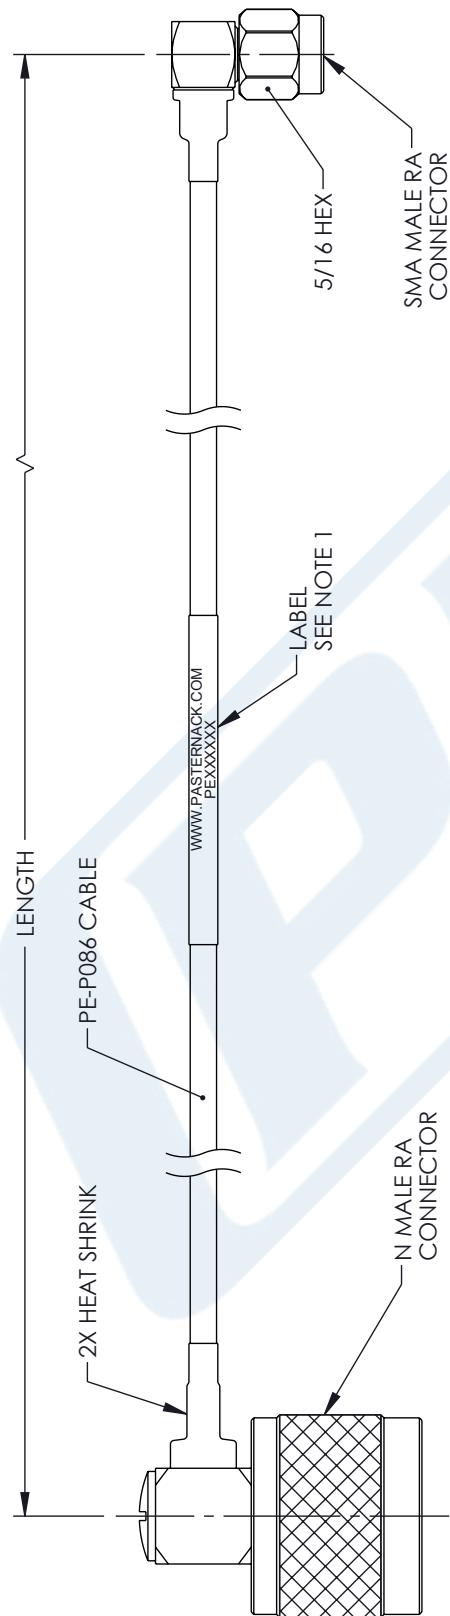

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6
INCHES APART FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.

 PASTERNACK® an INFINITI® brand				INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
				SCALE	REV A
				None	
				SHEET	
UNLESS OTHERWISE SPECIFIED FOLLOWING DIMENSIONS ARE IN INCHES INSINATIONS IN [] ARE MILLIMETERS	TOLERANCES: ± 0.2 [5] ± 0.05 [1.3]	FRACTIONS $\pm 1/32$ [5.5]	ANGLES 1° ADJUSTABLE LENGTH TOLERANCES: $>12 [305] = \pm [25] -0$ $>12 [305] \leq 60 [1524] \pm 12 [51] -0$ $>12 [305] \leq 120 [3048] \pm 14 [102] -0$ $>304 [7620] = \pm 16 [152] -0$ $>304 [7620] = \pm 45\% -0$	DESCRIPTION N MALE RIGHT ANGLE TO SMA MALE RIGHT ANGLE CABLE USING PE-P086 COAX	ITEM NO. PE3C6297
CAGE CODE A	DRAWN BY DZINN	SIZE A			