



Reverse Polarity TNC Jack to Straight Cut Lead Low Loss Cable Using LMR-240 Coax

RF Cable Assemblies Technical Data Sheet


PE3C6329

Configuration

- Connector 1: TNC Jack Reverse Polarity
- Connector 2: Straight Cut Lead
- Cable Type: LMR-240

Features

- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

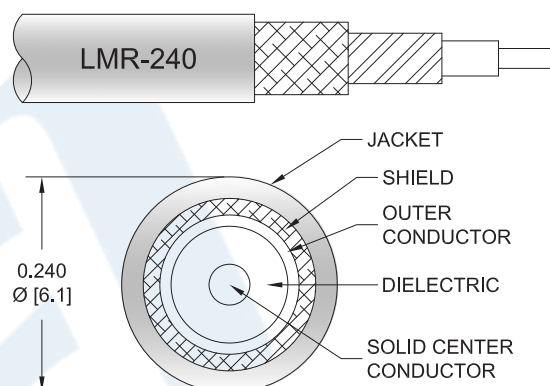

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C6329 50 ohm reverse polarity TNC jack to straight cut lead cable using LMR-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ω/1000ft [Ω/Km]
Jacket Spark			5,000	Vrms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Jack to Straight Cut Lead Low Loss Cable Using LMR-240 Coax PE3C6329](#)



Reverse Polarity TNC Jack to Straight Cut Lead Low Loss Cable Using LMR-240 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6329

Mechanical Specifications

Cable Assembly

Weight 0.06 lbs [27.22 g]

Cable

Cable Type	LMR-240
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.25 lbs-ft [0.34 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

Connectors

Description	Connector 1	Connector 2
Type	TNC Jack Reverse Polarity	Straight Cut Lead
Impedance	50 Ohms	0 Ohms
Contact Material and Plating	Brass, Gold	
Dielectric Type	PTFE	
Body Material and Plating	Brass, Nickel	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Jack to Straight Cut Lead Low Loss Cable Using LMR-240 Coax PE3C6329](#)



Reverse Polarity TNC Jack to Straight Cut Lead Low Loss Cable Using LMR-240 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6329

How to Order

Part Number Configuration:

PE3C6329

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C6329-12 = 12 inches long cable
PE3C6329-100cm = 100 cm long cable

Reverse Polarity TNC Jack to Straight Cut Lead Low Loss Cable Using LMR-240 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Jack to Straight Cut Lead Low Loss Cable Using LMR-240 Coax PE3C6329](https://www.pasternack.com/reverse-polarity-tnc-female-to-straight-cut-lead-low-loss-cable-using-lmr-240-pe3c6329-p.aspx)

URL: <https://www.pasternack.com/reverse-polarity-tnc-female-to-straight-cut-lead-low-loss-cable-using-lmr-240-pe3c6329-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C6329 CAD Drawing

Reverse Polarity TNC Jack to Straight Cut Lead Low Loss Cable Using LMR-240 Coax

