

## SMA Female Bulkhead to Push-On SMP Female Right Angle Cable Using RG316 Coax




### RF Cable Assemblies Technical Data Sheet

**PE3C6440**


#### Configuration

- Connector 1: SMA Female Bulkhead
- Connector 2: Push-OnSMP Female Right Angle
- Cable Type: RG316



#### Features

- 69% Phase Velocity
- FEP Jacket

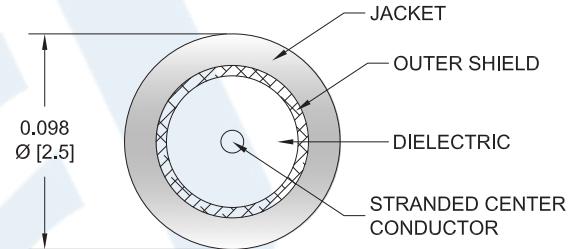

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C6440 SMA female bulkhead to SMP female push-on right angle cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMP cable assembly has a female to female gender configuration with 50 ohm flexible RG316 coax. The right angle SMP interface on the RG316 cable allows for easier connections in tight spaces. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		69		%
Operating Voltage (AC)			350	Vrms
Jacket Spark			2,000	Vrms

#### Mechanical Specifications

##### Cable Assembly

Weight 0.026 lbs [11.79 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead to Push-On SMP Female Right Angle Cable Using RG316 Coax PE3C6440](#)



## SMA Female Bulkhead to Push-On SMP Female Right Angle Cable Using RG316 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3C6440**

#### Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Female Bulkhead	SMP Female Right Angle
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Connection Method		Push-On
Contact Material and Plating		Beryllium Copper, Gold
Contact Plating Specification		30µ in. minimum
Dielectric Type		Teflon
Outer Conductor Material and Plating		Beryllium Copper, Gold
Outer Conductor Plating Specification		3µ in. minimum
Body Material and Plating	Brass, Nickel	Brass, Gold
Body Plating Specification		3µ in. minimum

#### Environmental Specifications

##### Temperature

Operating Range

-55 to +200 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead to Push-On SMP Female Right Angle Cable Using RG316 Coax PE3C6440](#)

SMA Female Bulkhead to Push-On SMP Female  
Right Angle Cable Using RG316 Coax



**RF Cable Assemblies Technical Data Sheet**

**PE3C6440**

**How to Order**

Part Number Configuration:

**PE3C6440**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C6440-12 = 12 inches long cable  
PE3C6440-100cm = 100 cm long cable

SMA Female Bulkhead to Push-On SMP Female Right Angle Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead to Push-On SMP Female Right Angle Cable Using RG316 Coax PE3C6440](#)

URL: <https://www.pasternack.com/sma-female-bulkhead-to-push-on-smp-female-cable-using-rg316-pe3c6440-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C6440 CAD Drawing

SMA Female Bulkhead to Push-On SMP Female Right Angle Cable Using RG316 Coax

