



2.92mm Male to 2.92mm Male Low Loss
Cable Using PECX006 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6493

Configuration

- Connector 1: 2.92mm Male
- Connector 2: 2.92mm Male
- Cable Type: PECX006
- Coax Flex Type: Semi-Rigid

Features

- Max Frequency 45 GHz
- 76.5% Phase Velocity
- 500 Mating Cycles
- Maximum Cable Assembly Length of 5 Feet

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C6493 2.92mm male to 2.92mm male cable using 086 coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack 2.92mm to 2.92mm cable assembly has a male to male gender configuration with 50 ohm semi-rigid PECX006 coax. The PE3C6493 2.92mm male to 2.92mm male cable assembly operates to 45 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Low Loss Cable Using PECX006 Coax PE3C6493](#)



2.92mm Male to 2.92mm Male Low Loss
Cable Using PECX006 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6493

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		45	GHz
VSWR			1.4:1	
Velocity of Propagation		76.5		%

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	5	10	18	26.5	GHz
Insertion Loss (Typ.)	0.12	0.39	0.56	0.77	0.96	dB/ft
	0.39	1.28	1.84	2.53	3.15	

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as $0.04 \cdot \sqrt{FGHz}$ dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.047 lbs [21.32 g]

Cable

Cable Type PECX006
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper, Silver
 Dielectric Type Microporous PTFE
 Number of Shields 1
 Outer Conductor Material and Plating Copper, Tin
 One Time Minimum Bend Radius 0.25 in [6.35 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Low Loss Cable Using PECX006 Coax PE3C6493](#)



2.92mm Male to 2.92mm Male Low Loss
Cable Using PECX006 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6493

Connectors

Description	Connector 1	Connector 2
Type	2.92mm Male Threaded	2.92mm Male Threaded
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	ASTM-B488	ASTM-B488
Dielectric Type	PTFE	PTFE
Body Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Body Plating Specification	ASTM-B488	ASTM-B488
Coupling Nut Material and Plating	Steel	Steel
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]

Environmental Specifications

Temperature

Operating Range -65 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Low Loss Cable Using PECX006 Coax PE3C6493](#)




2.92mm Male to 2.92mm Male Low Loss
Cable Using PECX006 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6493

Typical Performance Data

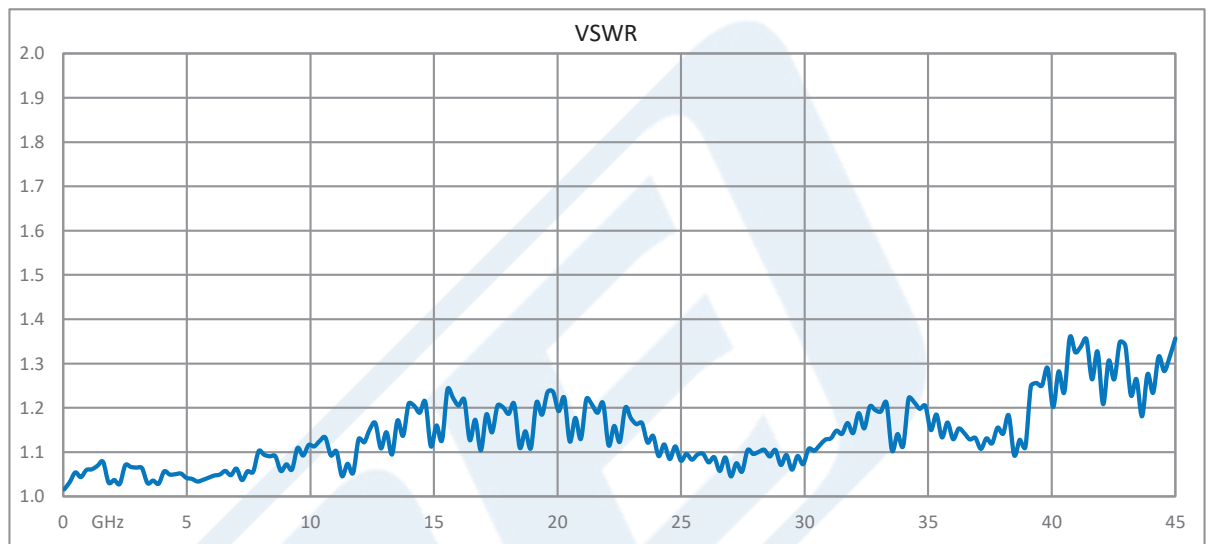

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Low Loss Cable Using PECX006 Coax PE3C6493](#)



2.92mm Male to 2.92mm Male Low Loss
Cable Using PECX006 Coax

RF Cable Assemblies Technical Data Sheet

PE3C6493

How to Order

Part Number Configuration:

PE3C6493

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C6493-12 = 12 inches long cable
PE3C6493-100cm = 100 cm long cable

2.92mm Male to 2.92mm Male Low Loss Cable Using PECX006 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Low Loss Cable Using PECX006 Coax PE3C6493](https://www.pasternack.com/2.92mm-male-2.92mm-male-086-cable-assembly-pe3c6493-p.aspx)


URL: <https://www.pasternack.com/2.92mm-male-2.92mm-male-086-cable-assembly-pe3c6493-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C6493 CAD Drawing

2.92mm Male to 2.92mm Male Low Loss Cable Using PECX006 Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/11/19	S.ELLIS

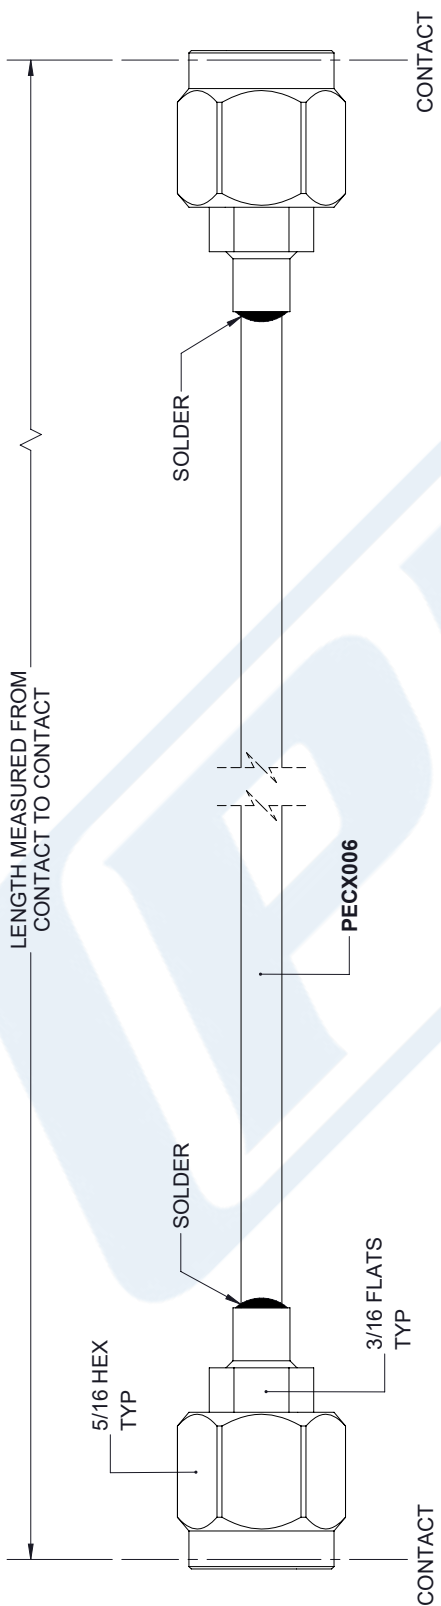

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table border="0"> <tr> <td>.X±.2</td> <td>[5.08]</td> <td>FRACTIONS</td> <td></td> </tr> <tr> <td>.XX±.01</td> <td>[.25]</td> <td></td> <td>± 1/32</td> </tr> <tr> <td>.XXX±.005</td> <td>[.13]</td> <td>ANGLES ± 1°</td> <td></td> </tr> </table> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p> <p>THIRD-ANGLE PROJECTION</p>	.X±.2	[5.08]	FRACTIONS		.XX±.01	[.25]		± 1/32	.XXX±.005	[.13]	ANGLES ± 1°		<p>PE PASTERNAK an INFINITI® brand</p> <p>Pasternack Enterprises, Inc. P. O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 www.pasternack.com e-mail: sales@pasternack.com</p>	<p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p>
	.X±.2	[5.08]	FRACTIONS											
.XX±.01	[.25]		± 1/32											
.XXX±.005	[.13]	ANGLES ± 1°												
<p>SIZE CAGE DRAWN BY PART NUMBER</p> <p>A 53919 K.DANG PE3C6493</p>	<p>REV A</p>													

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.