



## N Female Bulkhead to Straight Cut Lead Low Loss Cable Using LMR-200 Coax

### RF Cable Assemblies Technical Data Sheet


**PE3C6674**

#### Configuration

- Connector 1: N Female Bulkhead
- Connector 2: Straight Cut Lead
- Cable Type: LMR-200

#### Features

- Shielding Effectivity > 90 dB
- 83% Phase Velocity
- Double Shielded
- PE Jacket

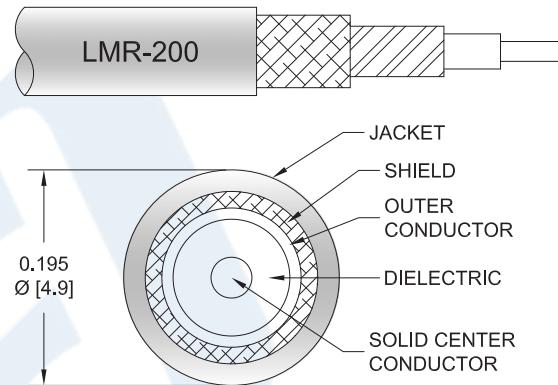

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C6674 50 ohm type N female bulkhead to straight cut lead cable using LMR-200 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		83		%
RF Shielding	90			dB
Group Delay		1.22 [4]		ns/ft [ns/m]
Capacitance		24.5 [80.38]		pF/ft [pF/m]
Inductance		0.061 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		5.36 [17.59]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		4.9 [16.08]		Ω/1000ft [Ω/Km]
Jacket Spark			3,000	Vrms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to Straight Cut Lead Low Loss Cable Using LMR-200 Coax PE3C6674](#)



## N Female Bulkhead to Straight Cut Lead Low Loss Cable Using LMR-200 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3C6674**

#### Mechanical Specifications

##### Cable Assembly

Weight	0.137 lbs [62.14 g]
<b>Cable</b>	
Cable Type	LMR-200
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

##### Connectors

Description	Connector 1	Connector 2
Type	N Female Bulkhead	Straight Cut Lead
Specification	IEC 61169-16	
Impedance	50 Ohms	0 Ohms
Mating Cycles	500	
Contact Material and Plating	Copper, Silver	
Contact Plating Specification	5 $\mu$ m minimum	
Dielectric Type	PTFE	
Outer Conductor Material and Plating	Brass, Tri-Metal	
Outer Conductor Plating Specification	2 $\mu$ m minimum	
Hex Size	1/2 inch	

#### Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to Straight Cut Lead Low Loss Cable Using LMR-200 Coax PE3C6674](#)



## N Female Bulkhead to Straight Cut Lead Low Loss Cable Using LMR-200 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3C6674**

#### How to Order

Part Number Configuration:

**PE3C6674**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C6674-12 = 12 inches long cable  
PE3C6674-100cm = 100 cm long cable

N Female Bulkhead to Straight Cut Lead Low Loss Cable Using LMR-200 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to Straight Cut Lead Low Loss Cable Using LMR-200 Coax PE3C6674](#)

URL: <https://www.pasternack.com/n-female-bulkhead-to-straight-cut-lead-low-loss-cable-using-lmr-200-pe3c6674-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C6674 CAD Drawing

N Female Bulkhead to Straight Cut Lead Low Loss Cable Using LMR-200 Coax

