

SMA Male Right Angle to Reverse Polarity TNC Plug Low Loss Cable Using LMR-195 Coax with HeatShrink




PE3C7392/HS

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: TNC Plug Reverse Polarity
- Cable Type: LMR-195
- Coax Flex Type: Flexible

Features

- Max Frequency 8 GHz
- Shielding Effectivity > 90 dB
- 80% Phase Velocity
- Double Shielded
- PE Jacket

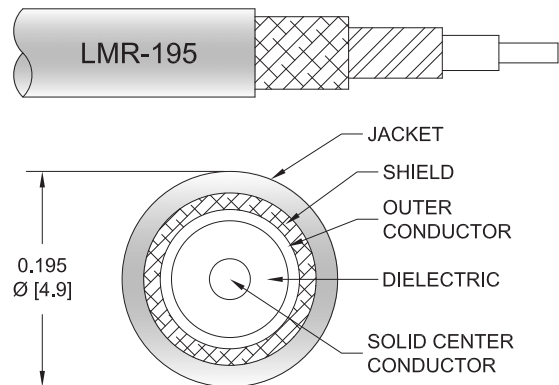

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C7392/HS SMA male right angle to reverse polarity TNC plug cable using LMR-195 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to reverse polarity TNC cable assembly has a male to plug gender configuration with 50 ohm flexible LMR-195 coax. The PE3C7392/HS SMA male to reverse polarity TNC plug cable assembly operates to 8 GHz. The right angle SMA interface on the LMR-195 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------------|
| Frequency Range | DC | | 8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 80 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.27 [4.17] | | ns/ft [ns/m] |
| Capacitance | | 25.4 [83.33] | | pF/ft [pF/m] |
| Inductance | | 0.064 [0.21] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 7.6 [24.93] | | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor | | 4.9 [16.08] | | Ohms/1000ft [Ohms/Km] |
| Operating Voltage (AC) | | | 500 | Vrms |

SMA Male Right Angle to Reverse Polarity TNC Plug Low Loss Cable Using LMR-195 Coax with HeatShrink



PE3C7392/HS

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|--------------|---------|---------|---------|-------|
| Jacket Spark | | | 3,000 | Vrms |

Specifications by Frequency

| Part Number | Length | Description | F1 | F2 | F3 | F4 | F5 | Units | Weight (lbs) |
|----------------|--------------------------|-----------------------|-----------|-------|-------|------|-------|-------|--------------|
| | | | Frequency | | | | | MHz | |
| PE3C7392/HS | Custom Lengths Available | Insertion Loss (Typ.) | 0.082 | 0.117 | 0.169 | 0.24 | 0.357 | dB/ft | |
| | | | 0.27 | 0.39 | 0.56 | 0.79 | 1.18 | dB/m | |
| PE3C7392/HS-12 | 12 In | Insertion Loss (Typ.) | 0.39 | 0.42 | 0.47 | 0.54 | 0.66 | dB | 0.073 |
| PE3C7392/HS-24 | 24 In | Insertion Loss (Typ.) | 0.47 | 0.54 | 0.64 | 0.78 | 1.02 | dB | 0.096 |
| PE3C7392/HS-36 | 36 In | Insertion Loss (Typ.) | 0.55 | 0.66 | 0.81 | 1.02 | 1.38 | dB | 0.118 |
| PE3C7392/HS-48 | 48 In | Insertion Loss (Typ.) | 0.63 | 0.77 | 0.98 | 1.26 | 1.73 | dB | 0.14 |
| PE3C7392/HS-60 | 60 In | Insertion Loss (Typ.) | 0.71 | 0.89 | 1.15 | 1.5 | 2.09 | dB | 0.162 |

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

| | |
|-----------------------------|----------------|
| Loss due to Connector 1: | 0.2 dB |
| Loss due to Connector 2: | 0.1 dB |
| Base Weight: | 0.073 pounds |
| Additional Weight per Inch: | 0.00184 pounds |

Mechanical Specifications

Cable Assembly

| | |
|----------------|---------------------|
| Width/Diameter | 0.5 in [12.7 mm] |
| Weight | 0.051 lbs [23.13 g] |

Cable

| | |
|--------------------------------------|------------------------|
| Cable Type | LMR-195 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper |
| Dielectric Type | PE (F) |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |
| Jacket Material | PE, Black |
| Jacket Diameter | 0.195 in [4.95 mm] |
| One Time Minimum Bend Radius | 0.5 in [12.7 mm] |
| Repeated Minimum Bend Radius | 2 in [50.8 mm] |
| Bending Moment | 0.2 lbs-ft [0.27 N-m] |
| Flat Plate Crush | 15 lbs/in [0.27 Kg/mm] |
| Tensile Strength | 40 lbs [18.14 Kg] |

SMA Male Right Angle to Reverse Polarity TNC Plug Low Loss Cable Using LMR-195 Coax with HeatShrink



PE3C7392/HS

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|----------------------|---------------------------|
| Type | SMA Male Right Angle | TNC Plug Reverse Polarity |
| Specification | MIL-STD-348A | |
| Impedance | 50 Ohms | 50 Ohms |
| Configuration | Right Angle | Straight |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | 50 µin minimum | 30 µin minimum |
| Dielectric Type | PTFE | |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | 100 µin minimum | 100 µin minimum |
| Coupling Nut Material and Plating | Brass, Nickel | |
| Coupling Nut Plating Specification | 100 µin minimum | |
| Hex Size | 5/16 inch | |
| Torque | 3 in-lbs 0.34 Nm | |

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:


SMA Male Right Angle to Reverse Polarity TNC Plug Low Loss Cable Using LMR-195 Coax with HeatShrink



PE3C7392/HS

Typical Performance Data

How to Order

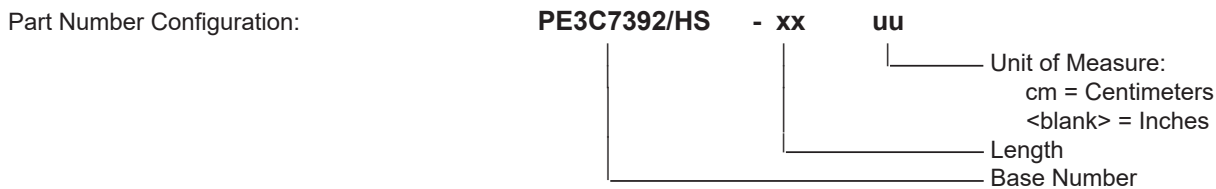

Example: PE3C7392/HS-12 = 12 inches long cable
PE3C7392/HS-100cm = 100 cm long cable

SMA Male Right Angle to Reverse Polarity TNC Plug Low Loss Cable Using LMR-195 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to Reverse Polarity TNC Plug Low Loss Cable Using LMR-195 Coax with HeatShrink PE3C7392/HS](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-reverse-polarity-tnc-plug-low-loss-cable-using-lmr-195-with-heatshrink-pe3c7392-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C7392/HS CAD Drawing

SMA Male Right Angle to Reverse Polarity TNC Plug Low Loss Cable Using LMR-195 Coax with HeatShrink

