

BNC Male to N Female Bulkhead Cable Using RG58 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet


PE3C7508/HS

Configuration

- Connector 1: BNC Male
- Connector 2: N Female Bulkhead
- Cable Type: RG58

Features

- Max Frequency 4 GHz
- 65.9% Phase Velocity
- PVC (NC) Jacket

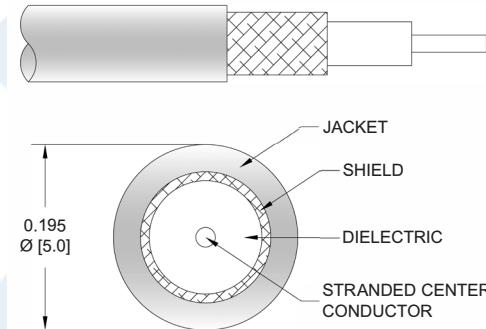

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C7508/HS BNC male to type N female bulkhead cable using RG58 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to type N cable assembly has a male to female gender configuration with 50 ohm flexible RG58 coax. The PE3C7508/HS BNC male to type N female cable assembly operates to 4 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to N Female Bulkhead Cable Using RG58 Coax with HeatShrink PE3C7508/HS](#)

BNC Male to N Female Bulkhead Cable Using RG58 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3C7508/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		65.9		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Typ.)	0.049	0.074	0.116	0.2	0.5	dB/ft
	0.16	0.24	0.38	0.66	1.64	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.143 lbs [64.86 g]

Cable

Cable Type RG58
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper, Tin
 Dielectric Type PE
 Number of Shields 1
 Shield Layer 1 Tinned Copper Braid
 Jacket Material PVC (NC), Black
 Jacket Diameter 0.195 in [4.95 mm]

One Time Minimum Bend Radius 0.98 in [24.89 mm]
 Repeated Minimum Bend Radius 1.96 in [49.78 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to N Female Bulkhead Cable Using RG58 Coax with HeatShrink PE3C7508/HS](#)

BNC Male to N Female Bulkhead Cable Using RG58 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3C7508/HS

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	N Female Bulkhead
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Phosphor Bronze, Gold
Contact Plating Specification	30 μ in minimum	
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Tri-Metal
Body Plating Specification	90 μ in minimum	
Coupling Nut Material and Plating	Brass, Nickel	

Environmental Specifications

Temperature

Operating Range

-40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to N Female Bulkhead Cable Using RG58 Coax with HeatShrink PE3C7508/HS](#)

BNC Male to N Female Bulkhead Cable
Using RG58 Coax with HeatShrink




RF Cable Assemblies Technical Data Sheet

PE3C7508/HS

How to Order

Part Number Configuration:

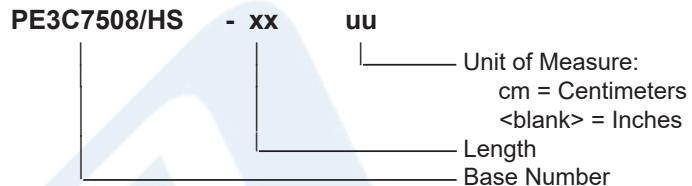

Example: PE3C7508/HS-12 = 12 inches long cable
PE3C7508/HS-100cm = 100 cm long cable

BNC Male to N Female Bulkhead Cable Using RG58 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to N Female Bulkhead Cable Using RG58 Coax with HeatShrink PE3C7508/HS](#)

URL: <https://www.pasternack.com/bnc-male-to-n-female-bulkhead-cable-using-rg58-with-heatshrink-pe3c7508-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C7508/HS CAD Drawing

BNC Male to N Female Bulkhead Cable Using RG58 Coax with HeatShrink

