

## N Male to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink




### PE3C7706/HS

#### Configuration

- Connector 1: N Male
- Connector 2: TNC Male Right Angle
- Cable Type: LMR-240-DB
- Coax Flex Type: Flexible

#### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

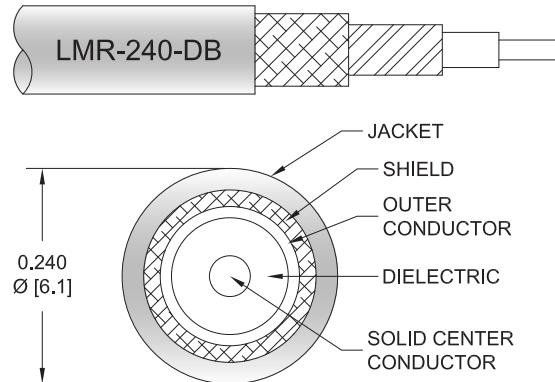

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C7706/HS type N male to TNC male right angle cable using LMR-240-DB coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-DB coax. The PE3C7706/HS type N male to TNC male cable assembly operates to 6 GHz. The right angle TNC interface on the LMR-240-DB cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ohms/1000ft [Ohms/Km]

## N Male to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink



### PE3C7706/HS

#### Electrical Specifications

Description	Minimum	Typical					Maximum	Units
Jacket Spark						5,000		Vrms

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3C7706/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.039	0.055	0.079	0.129	0.204	dB/ft	
			0.13	0.19	0.26	0.43	0.67	dB/m	
PE3C7706/HS-12	12 Inch	Insertion Loss (Typ.)	0.39	0.41	0.43	0.48	0.56	dB	0.168
PE3C7706/HS-24	24 Inch	Insertion Loss (Typ.)	0.43	0.46	0.51	0.61	0.76	dB	0.202
PE3C7706/HS-36	36 Inch	Insertion Loss (Typ.)	0.47	0.52	0.59	0.74	0.97	dB	0.236
PE3C7706/HS-48	48 Inch	Insertion Loss (Typ.)	0.51	0.57	0.67	0.87	1.17	dB	0.27
PE3C7706/HS-60	60 Inch	Insertion Loss (Typ.)	0.55	0.63	0.75	1	1.37	dB	0.304

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.25 dB
Base Weight:	0.168 pounds
Additional Weight per Inch:	0.1075 pounds

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.168 lbs [76.2 g]

##### Cable

Cable Type	LMR-240-DB
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.25 lbs-ft [0.34 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

## N Male to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink



### PE3C7706/HS

#### Connectors

Description	Connector 1	Connector 2
Type	N Male	TNC Male Right Angle
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 $\mu$ in minimum	50 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Tri-Metal
Body Plating Specification	100 $\mu$ in minimum	80 $\mu$ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Tri-Metal
Coupling Nut Plating Specification	100 $\mu$ in minimum	80 $\mu$ in minimum

#### Environmental Specifications

Operating Range Temperature

-40 to +85 deg C

#### Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:

## N Male to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink




### PE3C7706/HS

#### Typical Performance Data

#### How to Order

Part Number Configuration:

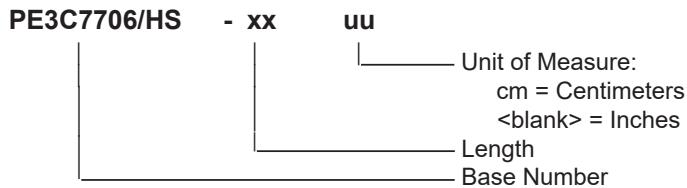

Example: PE3C7706/HS-12 = 12 inches long cable  
PE3C7706/HS-100cm = 100 cm long cable

N Male to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink PE3C7706/HS](#)

URL: <https://www.pasternack.com/n-male-to-tnc-male-low-loss-cable-using-lmr-240-db-with-heatshrink-pe3c7706-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C7706/HS CAD Drawing

N Male to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink

