

N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink




PE3C7707/HS

Configuration

- Connector 1: N Male Right Angle
- Connector 2: TNC Male Right Angle
- Cable Type: LMR-240-DB
- Coax Flex Type: Flexible

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

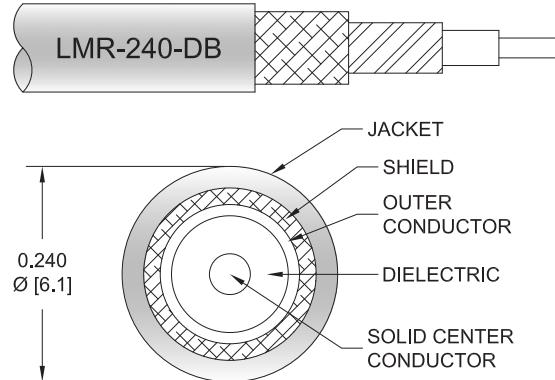

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C7707/HS type N male right angle to TNC male right angle cable using LMR-240-DB coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-DB coax. The PE3C7707/HS type N male to TNC male cable assembly operates to 6 GHz. The right angle type N and right angle TNC interfaces on the LMR-240-DB cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------------|
| Frequency Range | DC | | 6 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 84 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.21 [3.97] | | ns/ft [ns/m] |
| Capacitance | | 24.2 [79.4] | | pF/ft [pF/m] |
| Inductance | | 0.06 [0.2] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 3.2 [10.5] | | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor | | 3.89 [12.76] | | Ohms/1000ft [Ohms/Km] |

N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink



PE3C7707/HS

Electrical Specifications

| Description | Minimum | Typical | | | | | Maximum | Units |
|--------------|---------|---------|--|--|--|-------|---------|-------|
| Jacket Spark | | | | | | 5,000 | | Vrms |

Specifications by Frequency

| Part Number | Length | Description | F1 | F2 | F3 | F4 | F5 | Units | Weight (lbs) |
|----------------|--------------------------|-----------------------|-------|-------|-------|-------|-------|-------|--------------|
| | | Frequency | 250 | 500 | 1000 | 2500 | 6000 | MHz | |
| PE3C7707/HS | Custom Lengths Available | Insertion Loss (Typ.) | 0.039 | 0.055 | 0.079 | 0.129 | 0.204 | dB/ft | |
| | | | 0.13 | 0.19 | 0.26 | 0.43 | 0.67 | dB/m | |
| PE3C7707/HS-12 | 12 Inch | Insertion Loss (Typ.) | 0.49 | 0.51 | 0.53 | 0.58 | 0.66 | dB | 0.198 |
| PE3C7707/HS-24 | 24 Inch | Insertion Loss (Typ.) | 0.53 | 0.56 | 0.61 | 0.71 | 0.86 | dB | 0.232 |
| PE3C7707/HS-36 | 36 Inch | Insertion Loss (Typ.) | 0.57 | 0.62 | 0.69 | 0.84 | 1.07 | dB | 0.266 |
| PE3C7707/HS-48 | 48 Inch | Insertion Loss (Typ.) | 0.61 | 0.67 | 0.77 | 0.97 | 1.27 | dB | 0.3 |
| PE3C7707/HS-60 | 60 Inch | Insertion Loss (Typ.) | 0.65 | 0.73 | 0.85 | 1.1 | 1.47 | dB | 0.334 |

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

| | |
|-----------------------------|---------------|
| Loss due to Connector 1: | 0.2 dB |
| Loss due to Connector 2: | 0.25 dB |
| Base Weight: | 0.198 pounds |
| Additional Weight per Inch: | 0.1075 pounds |

Mechanical Specifications

Cable Assembly

| | |
|----------------|---------------------|
| Width/Diameter | 0.5 in [12.7 mm] |
| Weight | 0.198 lbs [89.81 g] |

Cable

| | |
|--------------------------------------|------------------------|
| Cable Type | LMR-240-DB |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper |
| Dielectric Type | PE (F) |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |
| Jacket Material | PE, Black |
| Jacket Diameter | 0.24 in [6.1 mm] |
| One Time Minimum Bend Radius | 0.75 in [19.05 mm] |
| Repeated Minimum Bend Radius | 2.5 in [63.5 mm] |
| Bending Moment | 0.25 lbs-ft [0.34 N-m] |
| Flat Plate Crush | 20 lbs/in [0.36 Kg/mm] |
| Tensile Strength | 80 lbs [36.29 Kg] |

N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink



PE3C7707/HS

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|--------------------|----------------------|
| Type | N Male Right Angle | TNC Male Right Angle |
| Impedance | 50 Ohms | 50 Ohms |
| Configuration | Right Angle | Right Angle |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | | 50 μ in minimum |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |
| Body Plating Specification | | 80 μ in minimum |
| Coupling Nut Material and Plating | | Brass, Tri-Metal |
| Coupling Nut Plating Specification | | 80 μ in minimum |

Environmental Specifications

Operating Range Temperature -40 to +85 deg C

Compliance Certifications

(see [product page](#) for current document)

Plotted and Other Data

Notes:

N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink




PE3C7707/HS

Typical Performance Data

How to Order

Part Number Configuration:

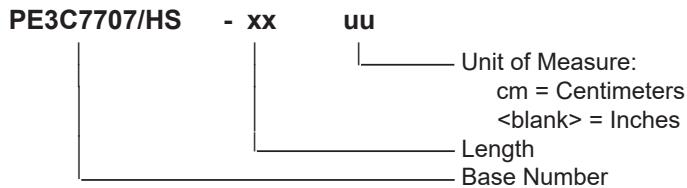

Example: PE3C7707/HS-12 = 12 inches long cable
PE3C7707/HS-100cm = 100 cm long cable

N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink PE3C7707/HS](#)

URL: <https://www.pasternack.com/n-male-right-angle-to-tnc-male-low-loss-cable-using-lmr-240-db-with-heatshrink-pe3c7707-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3C7707/HS CAD Drawing

N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-240-DB Coax with HeatShrink

