

SMA Male Right Angle to SMA Female Low PIM Cable  
50 Cm Length Using 1/4 inch Superflexible Coax



RF Cable Assemblies Technical Data Sheet


PE3C7868-50CM

**Configuration**

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Female
- Cable Type: 1/4" Superflexible

**Features**

- Max Frequency 6 GHz
- Low PIM: -150 dBc Max
- Shielding Effectivity > 120 dB
- 82% Phase Velocity
- PE Jacket
- Low PIM and Low Loss
- 100% Tested with PIM Test Results Marked on Cable

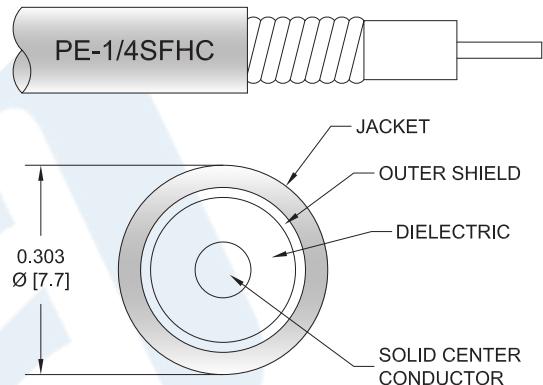

**Applications**

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- Low PIM Applications and PIM Testing

**Description**

Pasternack's PE3C7868-50CM SMA male right angle to SMA female 50 cm cable using 1/4 inch superflexible coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack SMA to SMA cable assembly has a male to female gender configuration with 50 ohm corrugated 1/4" superflexible coax. The PE3C7868-50CM SMA male to SMA female cable assembly operates to 6 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -150 dBc. The right angle SMA interface on the 1/4" superflexible cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Low PIM Cable 50 Cm Length Using 1/4 inch Superflexible Coax PE3C7868-50CM](#)

# SMA Male Right Angle to SMA Female Low PIM Cable 50 Cm Length Using 1/4 inch Superflexible Coax



## RF Cable Assemblies Technical Data Sheet

**PE3C7868-50CM**

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.5:1	
Velocity of Propagation		82		%
RF Shielding	120			dB
Passive Intermodulation			-150	dBc
Capacitance		24.4 [80.05]		pF/ft [pF/m]
Inductance		0.059 [0.19]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		2.53 [8.3]		Ω/1000ft [Ω/Km]
Jacket Spark			2,000	Vrms

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.27	0.29	0.31	0.34	0.42	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated 0.15 dB for the right angle connector and 0.1 dB for the straight connector.

### Mechanical Specifications

#### Cable Assembly

Length\*  
Diameter

19.68 in [499.87 mm]  
0.36 in [9.14 mm]

#### Cable

Cable Type  
Impedance  
Inner Conductor Type  
Inner Conductor Material and Plating  
Dielectric Type  
Number of Shields  
Shield Layer 1

1/4" Superflexible  
50 Ohms  
Solid  
Copper Clad Aluminum  
PE (F)  
1  
Helically Corrugated Copper Tube

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Low PIM Cable 50 Cm Length Using 1/4 inch Superflexible Coax PE3C7868-50CM](#)

# SMA Male Right Angle to SMA Female Low PIM Cable 50 Cm Length Using 1/4 inch Superflexible Coax



## RF Cable Assemblies Technical Data Sheet

**PE3C7868-50CM**

Jacket Material	PE, Black
Jacket Diameter	0.303 in [7.7 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Typical Flex Cycles	20
Tensile Strength	79 lbs [35.83 Kg]

### Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Female
Specification	SMA	SMA
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Beryllium Copper, Silver
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	

### Environmental Specifications

#### Temperature

Operating Range

-40 to +85 deg C

### Compliance Certifications (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Low PIM Cable 50 Cm Length Using 1/4 inch Superflexible Coax PE3C7868-50CM](#)

SMA Male Right Angle to SMA Female Low PIM Cable  
50 Cm Length Using 1/4 inch Superflexible Coax



RF Cable Assemblies Technical Data Sheet

PE3C7868-50CM

**How to Order**

Part Number Configuration:

**PE3C7868**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C7868-12 = 12 inches long cable  
PE3C7868-100cm = 100 cm long cable

SMA Male Right Angle to SMA Female Low PIM Cable 50 Cm Length Using 1/4 inch Superflexible Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Low PIM Cable 50 Cm Length Using 1/4 inch Superflexible Coax PE3C7868-50CM](#)

URL: <https://www.pasternack.com/sma-male-sma-female-pe-1-4-sfhc-cable-assembly-pe3c7868-50cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3C7868-50CM CAD Drawing**  
 SMA Male Right Angle to SMA Female Low PIM Cable  
 50 Cm Length Using 1/4 inch Superflexible Coax

