

## 2.2-5 Male to 2.2-5 Male Low PIM Cable 100 CM Length Using TFT-5G-402 Coax Using Times Microwave Components

### PE3C7980-100CM




#### Configuration

- Connector 1: 2.2-5 Male
- Connector 2: 2.2-5 Male
- Cable Type: TFT-5G-402
- Coax Flex Type: Flexible

#### Features

- Max Frequency 3 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket
- 100 Mating Cycles

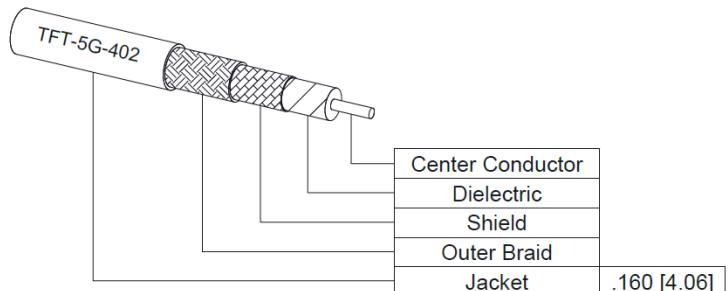

#### Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

#### Description

Pasternack's PE3C7980-100CM 2.2-5 male to 2.2-5 male 100 cm cable using TFT-5G-402 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 2.2-5 to 2.2-5 cable assembly has a male to male gender configuration with 50 ohm flexible TFT-5G-402 coax. The PE3C7980-100CM 2.2-5 male to 2.2-5 male cable assembly operates to 3 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	80			dB
Passive Intermodulation			-160	dBc

2.2-5 Male to 2.2-5 Male Low PIM Cable  
100 CM Length Using TFT-5G-402 Coax Using  
Times Microwave Components



## PE3C7980-100CM

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Capacitance		26.7 [87.6]		pF/ft [pF/m]

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.33	0.4	0.56	0.97	1.47	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of  $0.1 * \text{SQRT}(F\text{GHz})$  dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length	39.37 in [100 cm]
Width/Diameter	0.65 in [16.51 mm]

#### Cable

Cable Type	TFT-5G-402
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PTFE
Number of Shields	2
Jacket Material	FEP, Blue
Jacket Diameter	0.16 in [4.06 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]

2.2-5 Male to 2.2-5 Male Low PIM Cable  
100 CM Length Using TFT-5G-402 Coax Using  
Times Microwave Components



## PE3C7980-100CM

### Connectors

Description	Connector 1	Connector 2
Type	2.2-5 Male	2.2-5 Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Mating Cycles	100	100
Contact Material and Plating	Beryllium Copper, Silver	Beryllium Copper, Silver
Contact Plating Specification	200 $\mu$ in	200 $\mu$ in
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Silver	Brass, Silver
Body Plating Specification	100 $\mu$ in	100 $\mu$ in
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	100 $\mu$ in	100 $\mu$ in
Torque	26 in-lbs 2.94 Nm	26 in-lbs 2.94 Nm

### Environmental Specifications

Operating Range Temperature -40 to +125 deg C

### Compliance Certifications

(see product page for current document)

### Plotted and Other Data

Notes:

2.2-5 Male to 2.2-5 Male Low PIM Cable  
100 CM Length Using TFT-5G-402 Coax Using  
Times Microwave Components




## PE3C7980-100CM

### Typical Performance Data

### How to Order

Part Number Configuration:

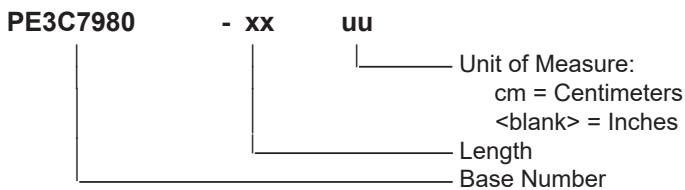

Example: PE3C7980-12 = 12 inches long cable  
PE3C7980-100cm = 100 cm long cable

2.2-5 Male to 2.2-5 Male Low PIM Cable 100 CM Length Using TFT-5G-402 Coax Using Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Male to 2.2-5 Male Low PIM Cable 100 CM Length Using TFT-5G-402 Coax Using Times Microwave Components PE3C7980-100CM](#)

URL: <https://www.pasternack.com/2.2-5-male-to-2.2-5-male-low-pim-cable-100-cm-length-using-tft-5g-402-pe3c7980-100cm-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C7980-100CM CAD Drawing

2.2-5 Male to 2.2-5 Male Low PIM Cable 100 CM Length Using TFT-5G-402 Coax Using Times Microwave Components

