



SMA Male Right Angle to Reverse Thread SMA Male Right Angle Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet


PE3C8036

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male Reverse Thread Right Angle
- Cable Type: LMR-100A

Features

- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

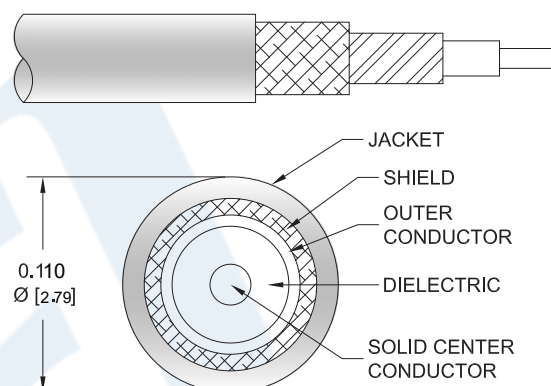

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C8036 SMA male right angle to reverse thread SMA male right angle cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to reverse thread SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-100A coax. The right angle SMA interfaces on the LMR-100A cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to Reverse Thread SMA Male Right Angle Low Loss Cable Using LMR-100 Coax PE3C8036](#)



SMA Male Right Angle to Reverse Thread SMA Male Right Angle Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3C8036

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
Operating Voltage (AC)			335	Vrms
Jacket Spark			2,000	Vrms

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.05xSQRT(fGHz) dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.037 lbs [16.78 g]

Cable

Cable Type LMR-100A
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel
 Dielectric Type PE
 Number of Shields 2
 Shield Layer 1 Aluminum Tape
 Shield Layer 2 Tinned Copper Braid
 Jacket Material PVC, Black
 Jacket Diameter 0.11 in [2.79 mm]
 One Time Minimum Bend Radius 0.25 in [6.35 mm]
 Repeated Minimum Bend Radius 1 in [25.4 mm]
 Bending Moment 0.1 lbs-ft [0.14 N-m]
 Flat Plate Crush 10 lbs/in [0.18 Kg/mm]
 Tensile Strength 15 lbs [6.8 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to Reverse Thread SMA Male Right Angle Low Loss Cable Using LMR-100 Coax PE3C8036](#)



SMA Male Right Angle to Reverse Thread SMA Male
Right Angle Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3C8036

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Male Reverse Thread Right Angle
Specification	MIL-STD-348A	MIL-C-39012
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Gold
Contact Plating Specification	50 µin minimum	MIL-G-45204
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	
Hex Size	5/16 inch	5/16 in.
Torque	3 in-lbs [0.34 Nm]	5 in-lbs [0.57 Nm]

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to Reverse Thread SMA Male Right Angle Low Loss Cable Using LMR-100 Coax PE3C8036](#)



SMA Male Right Angle to Reverse Thread SMA Male Right Angle Low Loss Cable Using LMR-100 Coax

RF Cable Assemblies Technical Data Sheet

PE3C8036

How to Order

Part Number Configuration:

PE3C8036

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C8036-12 = 12 inches long cable
PE3C8036-100cm = 100 cm long cable

SMA Male Right Angle to Reverse Thread SMA Male Right Angle Low Loss Cable Using LMR-100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to Reverse Thread SMA Male Right Angle Low Loss Cable Using LMR-100 Coax PE3C8036](#)

URL: <https://www.pasternack.com/sma-male-right-angle-to-reverse-thread-sma-male-low-loss-cable-using-lmr-100-pe3c8036-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C8036 CAD Drawing

SMA Male Right Angle to Reverse Thread SMA Male
Right Angle Low Loss Cable Using LMR-100 Coax

