

2.2-5 Female to N Female Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax



RF Cable Assemblies Technical Data Sheet


PE3C8065-60

Configuration

- Connector 1: 2.2-5 Female
- Connector 2: N Female
- Cable Type: 1/4" Superflexible

Features

- Max Frequency 6 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 120 dB
- 82% Phase Velocity
- PE Jacket
- Low PIM and Low Loss
- 100% Tested with PIM Test Results Marked on Cable

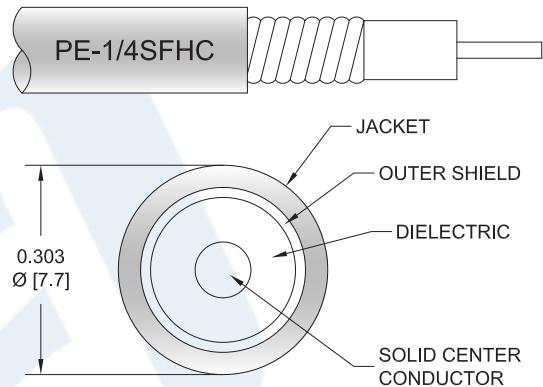

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- PIM Testing

Description

Pasternack's PE3C8065-60 2.2-5 female to type N female 60 inch cable using 1/4 inch superflexible coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack 2.2-5 to type N cable assembly has a female to female gender configuration with 50 ohm corrugated 1/4" superflexible coax. The PE3C8065-60 2.2-5 female to type N female cable assembly operates to 6 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Female to N Female Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax PE3C8065-60](#)



2.2-5 Female to N Female Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax

RF Cable Assemblies Technical Data Sheet

PE3C8065-60

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range | DC | | 6 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 82 | | % |
| RF Shielding | 120 | | | dB |
| Passive Intermodulation | | | -160 | dBc |
| Capacitance | | 24.4 [80.05] | | pF/ft [pF/m] |
| Inductance | | 0.059 [0.19] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 3.2 [10.5] | | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor | | 2.53 [8.3] | | Ω/1000ft [Ω/Km] |
| Jacket Spark | | | 2,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|-----|-------|
| Frequency | 0.1 | 0.25 | 0.5 | 1 | 3 | GHz |
| Insertion Loss (Typ.) | 0.25 | 0.3 | 0.35 | 0.45 | 0.7 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector loss.

Mechanical Specifications

Cable Assembly

| | |
|----------|--------------------|
| Length* | 60 in [152.4 cm] |
| Diameter | 0.62 in [15.75 mm] |

Cable

| | |
|--------------------------------------|----------------------------------|
| Cable Type | 1/4" Superflexible |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper Clad Aluminum |
| Dielectric Type | PE (F) |
| Number of Shields | 1 |
| Shield Layer 1 | Helically Corrugated Copper Tube |
| Jacket Material | PE, Black |
| Jacket Diameter | 0.303 in [7.7 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Female to N Female Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax PE3C8065-60](#)



2.2-5 Female to N Female Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax

RF Cable Assemblies Technical Data Sheet

PE3C8065-60

| | |
|------------------------------|-------------------|
| One Time Minimum Bend Radius | 0.5 in [12.7 mm] |
| Repeated Minimum Bend Radius | 1 in [25.4 mm] |
| Typical Flex Cycles | 20 |
| Tensile Strength | 79 lbs [35.83 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|--------------------------------------|------------------|------------------|
| Type | 2.2-5 Female | N Female |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Bronze, Silver | Bronze, Silver |
| Dielectric Type | PTFE | PTFE |
| Outer Conductor Material and Plating | Bronze, Silver | Brass, Tri-Metal |
| Body Material and Plating | Brass, Tri-Metal | Brass, Tri-Metal |

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Female to N Female Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax PE3C8065-60](#)

2.2-5 Female to N Female Low PIM Cable 60 Inch
Length Using 1/4 inch Superflexible Coax



RF Cable Assemblies Technical Data Sheet

PE3C8065-60

How to Order

Part Number Configuration:

PE3C8065

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C8065-12 = 12 inches long cable
PE3C8065-100cm = 100 cm long cable

2.2-5 Female to N Female Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Female to N Female Low PIM Cable 60 Inch Length Using 1/4 inch Superflexible Coax PE3C8065-60](#)


URL: <https://www.pasternack.com/2.2-5-female-n-female-pe-1-4-sfhc-cable-assembly-pe3c8065-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C8065-60 CAD Drawing

2.2-5 Female to N Female Low PIM Cable 60 Inch
Length Using 1/4 inch Superflexible Coax

| REVISIONS | | | | | |
|-----------|-----------------|------------|----------|--|--|
| REV. | DESCRIPTION | DATE | APPROVED | | |
| A | INITIAL RELEASE | 10/03/2021 | SELLIS | | |

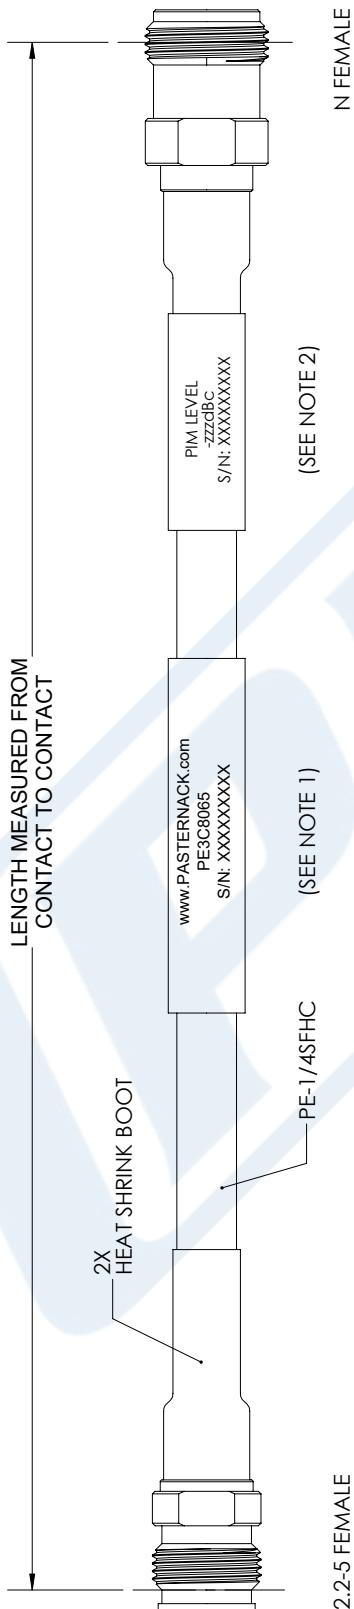

2.2-5 FEMALE

NOTES

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED, CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE END OF THE CONNECTOR.
2. 6" FROM CABLE END 1 PLACE FOR ALL LENGTHS OF CABLE.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

| | | |
|---|------------------|---|
|  PASTERNACK an INFINITE brand | |  |
| UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS | FRACTIONS | THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNACK CORPORATION ALL RIGHTS RESERVED. |
| X = ± 2 [5.08] | XX = ± .02 [.51] | Pasterнак Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Website: www.pasterнак.com E-mail: sales@pasterнак.com |
| XXX = ± .005 [.13] | ANGLES ± 1° | |
| CABLE LENGTH (L) TOLERANCES: | | |
| L ≤ 12 [305] = +1 [25] / -0 | | |
| 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 | | |
| 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 | | |
| 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 | | |
| 300 [7620] < L = +5%L / -0 | | |
| ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. | | SCALE N/A |
| SIZE A | CAGE CODE 53919 | DRAWN BY MVEERAPPAN |
| ITEM NO. PE3C8065 | REV A | |