

## 2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-5G-402 Coax Using Times Microwave Components




### PE3C8392

#### Configuration

- Connector 1: 2.2-5 Male
- Connector 2: N Female Bulkhead
- Cable Type: TFT-5G-402
- Coax Flex Type: Flexible

#### Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 80 dB
- 76% Phase Velocity
- Double Shielded
- FEP Jacket

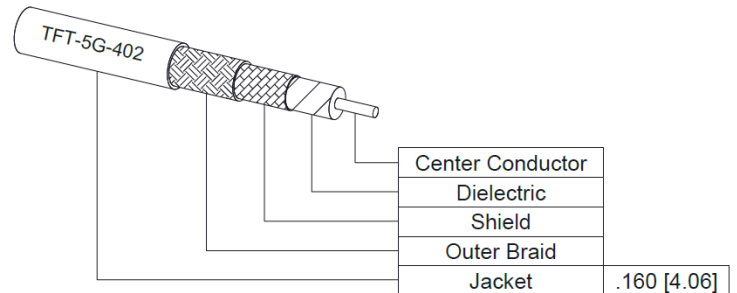

#### Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Indoor and Outdoor Use
- Plenum Rated Applications

#### Description

Pasternack's PE3C8392 2.2-5 male to type N female bulkhead cable using TFT-5G-402 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 2.2-5 to type N cable assembly has a male to female gender configuration with 50 ohm flexible TFT-5G-402 coax. The PE3C8392 2.2-5 male to type N female cable assembly operates to 5.8 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 80 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

| Description                                | Minimum | Typical | Maximum | Units |
|--|---------|---------|---------|-------|
| Frequency Range                            | DC      |         | 5.8     | GHz   |
| VSWR                                       |         |         | 1.4:1   |       |
| Velocity of Propagation                    |         | 76      |         | %     |
| RF Shielding                               | 80      |         |         | dB    |
| Passive Intermodulation                    |         |         | -160    | dBc   |
| IM3 (2x43dBm Tones) at 850 MHz or 1900 MHz |         |         |         |       |

## 2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-5G-402 Coax Using Times Microwave Components



### PE3C8392

#### Electrical Specifications

| Description | Minimum | Typical     | Maximum | Units        |
|-------------|---------|-------------|---------|--------------|
| Capacitance |         | 26.7 [87.6] |         | pF/ft [pF/m] |

#### Specifications by Frequency

| Description           | F1    | F2    | F3    | F4   | F5    | Units |
|-----------------------|-------|-------|-------|------|-------|-------|
| Frequency             | 0.25  | 0.5   | 1     | 2.5  | 5.8   | GHz   |
| Insertion Loss (Typ.) | 0.057 | 0.083 | 0.117 | 0.19 | 0.295 | dB/ft |
|                       | 0.19  | 0.27  | 0.38  | 0.62 | 0.97  | dB/m  |

#### Electrical Specification Notes:

Insertion Loss does not include the Isos of the connectors. Insertion Loss is estimated as  $0.1 \cdot \sqrt{FGHz}$  dB for the male connector and 0.1 dB for the female connector.

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter 0.748 in [19 mm]

##### Cable

Cable Type TFT-5G-402  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper  
 Dielectric Type PTFE  
 Number of Shields 2  
 Jacket Material FEP, Blue  
 Jacket Diameter 0.16 in [4.06 mm]  
 One Time Minimum Bend Radius 0.75 in [19.05 mm]

## 2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-5G-402 Coax Using Times Microwave Components



### PE3C8392

#### Connectors

| Description                           | Connector 1              | Connector 2       |
|---------------------------------------|--------------------------|-------------------|
| Type                                  | 2.2-5 Male               | N Female Bulkhead |
| Impedance                             | 50 Ohms                  | 50 Ohms           |
| Configuration                         | Straight                 | Straight          |
| Mating Cycles                         | 100                      |                   |
| Contact Material and Plating          | Beryllium Copper, Silver | Brass, Silver     |
| Contact Plating Specification         | 200 µin                  | 5 µm              |
| Dielectric Type                       | PTFE                     | PTFE              |
| Outer Conductor Material and Plating  |                          | Brass, Tri-Metal  |
| Outer Conductor Plating Specification |                          | 3 µm              |
| Body Material and Plating             | Brass, Silver            | Brass, Tri-Metal  |
| Body Plating Specification            | 100 µin                  | 3 µm              |
| Coupling Nut Material and Plating     | Brass, Tri-Metal         |                   |
| Coupling Nut Plating Specification    | 100 µin                  |                   |
| Torque                                | 26 in-lbs 2.94 Nm        | 10 in-lbs 1.13 Nm |

#### Environmental Specifications

Operating Range Temperature -40 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

## 2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-5G-402 Coax Using Times Microwave Components



### PE3C8392

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE3C8392**

**- xx**

**uu**

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3C8392-12 = 12 inches long cable  
PE3C8392-100cm = 100 cm long cable

2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-5G-402 Coax Using Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-5G-402 Coax Using Times Microwave Components PE3C8392](https://www.pasternack.com/2.2-5-male-to-n-female-bulkhead-low-pim-cable-using-tft-5g-402-pe3c8392.html)

URL: <https://www.pasternack.com/2.2-5-male-to-n-female-bulkhead-low-pim-cable-using-tft-5g-402-pe3c8392.html>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C8392 CAD Drawing

## 2.2-5 Male to N Female Bulkhead Low PIM Cable Using TFT-5G-402 Coax Using Times Microwave Components

