

N Male Right Angle to Reverse Polarity SMA Plug Low Loss Cable Using LMR-240-UF Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet


PE3C8401/HS

Configuration

- Connector 1: N Male Right Angle
- Connector 2: SMA Plug Reverse Polarity
- Cable Type: LMR-240-UF

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- TPE Jacket

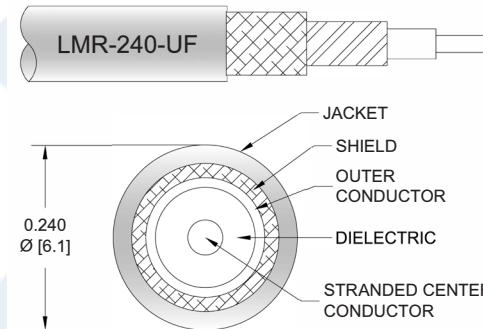

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C8401/HS type N male right angle to reverse polarity SMA plug 12 inch cable using LMR-240-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to reverse polarity SMA cable assembly has a male to plug gender configuration with 50 ohm flexible LMR-240-UF coax. The PE3C8401/HS type N male to reverse polarity SMA plug cable assembly operates to 5.8 GHz. The right angle type N interface on the LMR-240-UF cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to Reverse Polarity SMA Plug Low Loss Cable Using LMR-240-UF Coax with HeatShrink PE3C8401/HS](#)

N Male Right Angle to Reverse Polarity SMA Plug Low Loss Cable Using LMR-240-UF Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3C8401/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.5:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		4.28 [14.04]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ω/1000ft [Ω/Km]
Jacket Spark			5,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.047	0.066	0.096	0.155	0.244	dB/ft

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as $0.05 \times \text{SQRT}(f\text{GHz})$ dB for the right angle connector and 0.1 dB for the straight connector.

Mechanical Specifications

Cable Assembly

Weight 0.142 lbs [64.41 g]

Cable

Cable Type LMR-240-UF
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper
Dielectric Type PE (F)
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material TPE, Black
Jacket Diameter 0.24 in [6.1 mm]

One Time Minimum Bend Radius 0.75 in [19.05 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to Reverse Polarity SMA Plug Low Loss Cable Using LMR-240-UF Coax with HeatShrink PE3C8401/HS](#)



N Male Right Angle to Reverse Polarity SMA Plug Low Loss Cable Using LMR-240-UF Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3C8401/HS

Repeated Minimum Bend Radius
Bending Moment
Flat Plate Crush
Tensile Strength

2.5 in [63.5 mm]
0.13 lbs-ft [0.18 N-m]
13 lbs/in [0.23 Kg/mm]
80 lbs [36.29 Kg]

Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle	SMA Plug Reverse Polarity
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Gold
Coupling Nut Material and Plating		Brass, Gold
Hex Size		5/16 inch
Torque		3 in-lbs [0.34 Nm]

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to Reverse Polarity SMA Plug Low Loss Cable Using LMR-240-UF Coax with HeatShrink PE3C8401/HS](#)




N Male Right Angle to Reverse Polarity SMA Plug Low Loss Cable Using LMR-240-UF Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3C8401/HS

How to Order

Part Number Configuration:

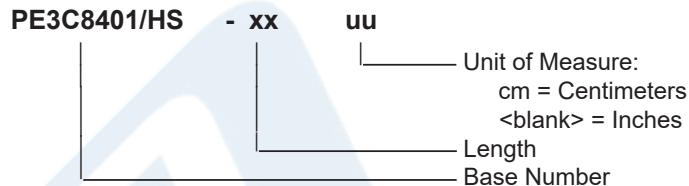

Example: PE3C8401/HS-12 = 12 inches long cable
PE3C8401/HS-100cm = 100 cm long cable


N Male Right Angle to Reverse Polarity SMA Plug Low Loss Cable Using LMR-240-UF Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to Reverse Polarity SMA Plug Low Loss Cable Using LMR-240-UF Coax with HeatShrink PE3C8401/HS](#)

URL: <https://www.pasternack.com/n-male-right-angle-to-reverse-polarity-sma-plug-low-loss-cable-using-lmr-240-uf-with-heatshrink-pe3c8401-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C8401/HS CAD Drawing
N Male Right Angle to Reverse Polarity SMA Plug Low Loss
Cable Using LMR-240-UF Coax with HeatShrink

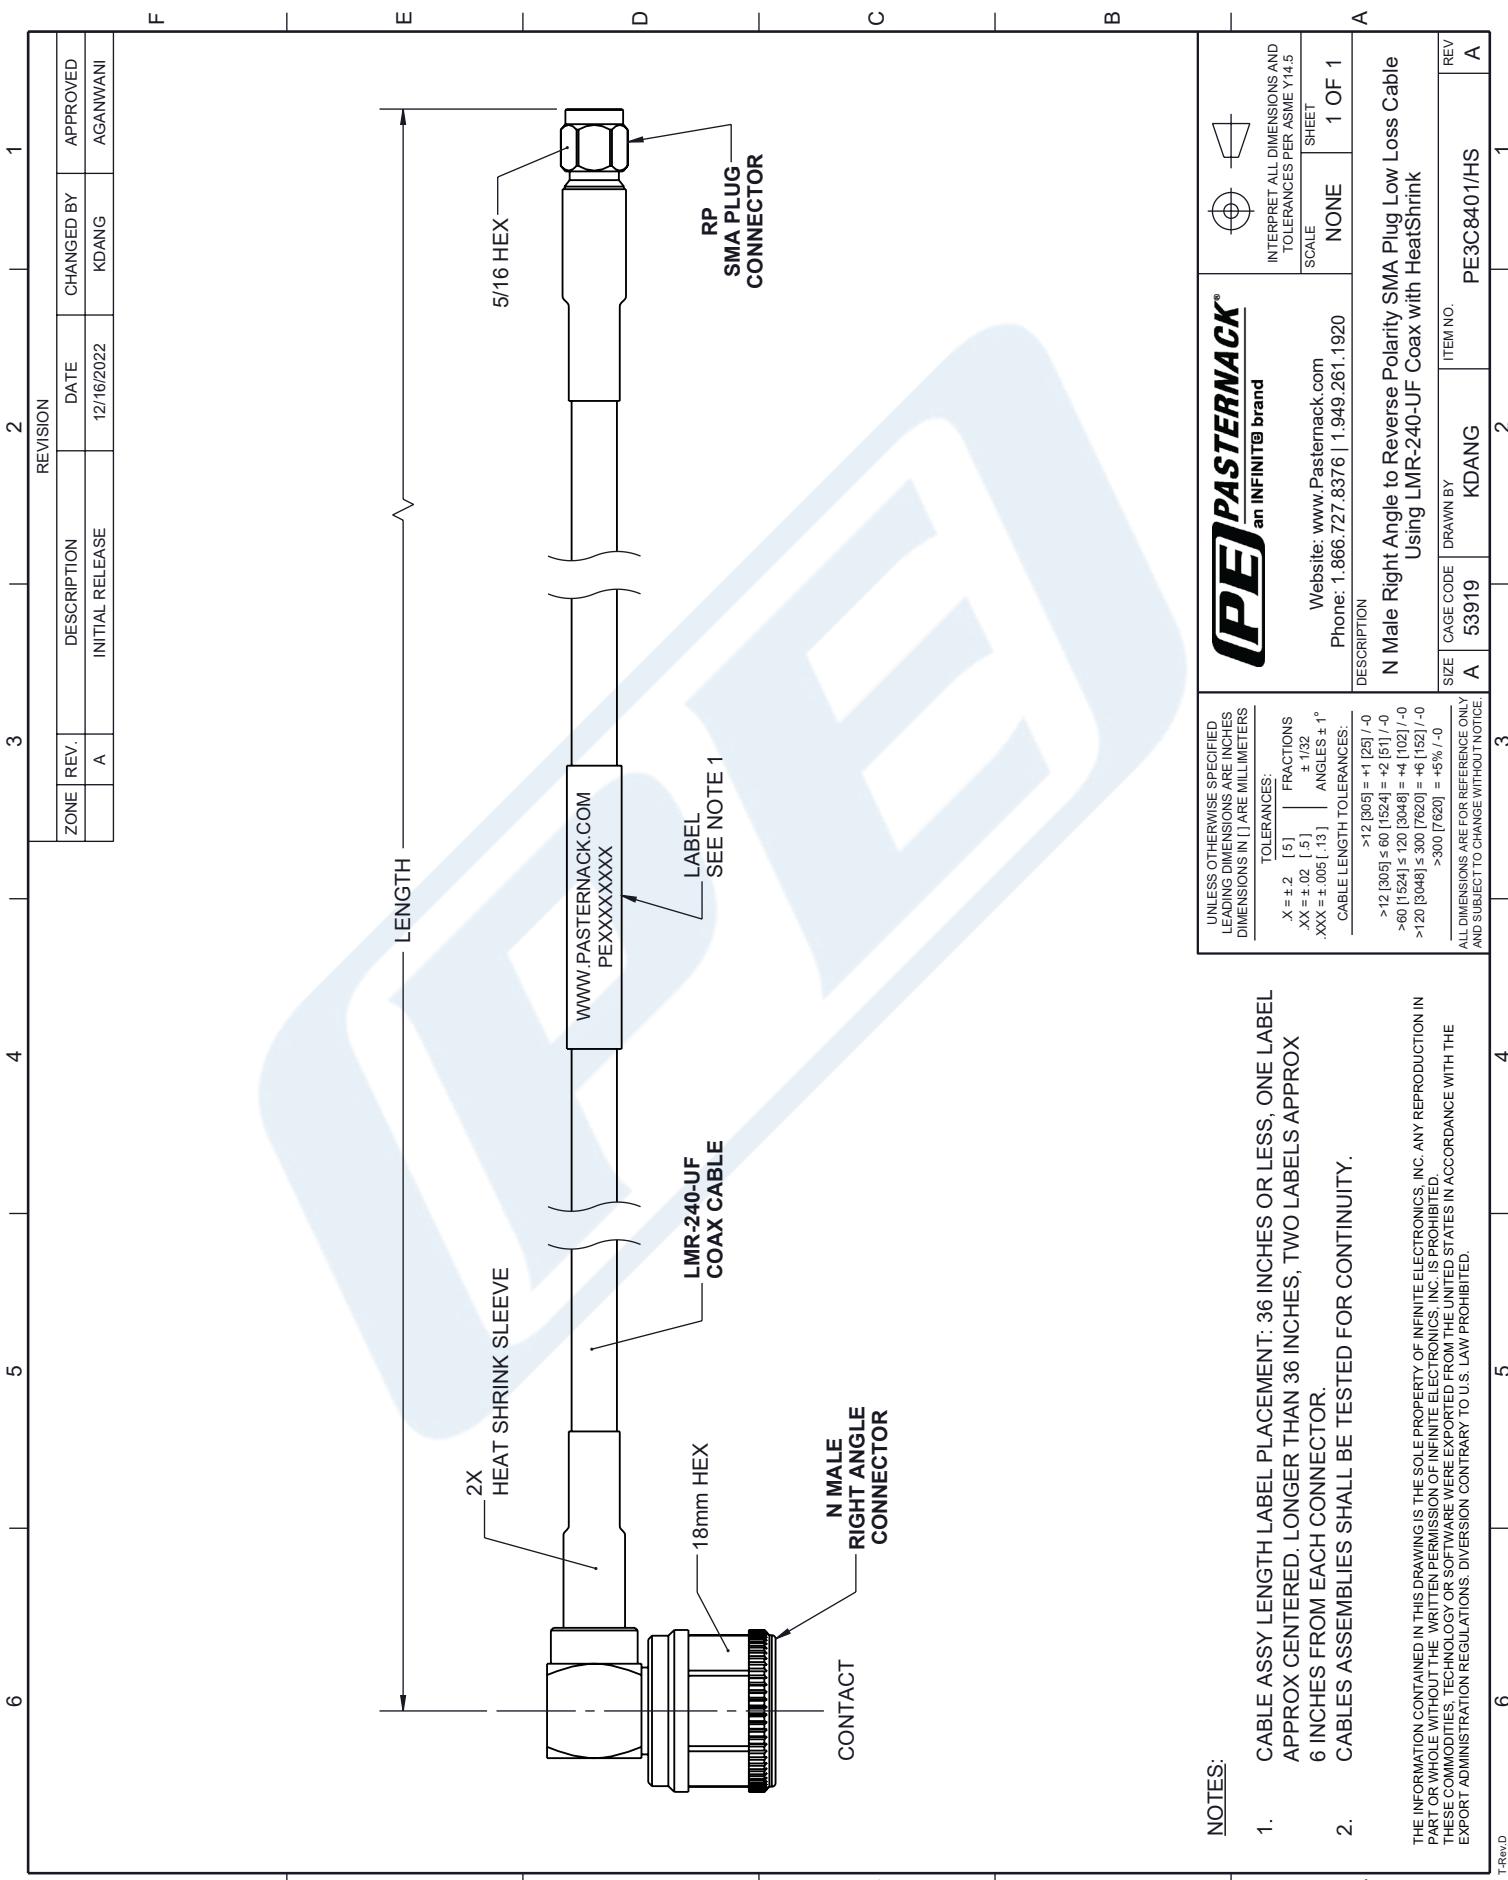

 PASTERNACK® an INFINITE® brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
		SCALE	1 OF 1
DESCRIPTION	WWW.PASTERNACK.COM Phone: 1.886.727.8376 1.949.261.1920	WEBSITE: www.Pasternack.com Phone: 1.886.727.8376 1.949.261.1920	ITEM NO.
UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS			PE3C8401/HS
TOLERANCES: $X = \pm 0.2$ [5.1] FRACTIONS $XX = \pm 0.02$ [0.5] $\pm 1/32$ ANGLES $\pm 1^\circ$ $.XXX = \pm 0.005$ [0.13] CABLE LENGTH TOLERANCES: $>12 [305] \pm 60 [1524] = \pm 1/25$ [0.004] / -0 $>80 [1124] \pm 20 [3048] = \pm 1/51$ [0.012] / -0 $>120 [3048] \pm 300 [7620] = \pm 1/52$ [0.012] / -0 $>80 [1124] \pm 20 [3048] = \pm 1/51$ [0.012] / -0 $>120 [3048] \pm 300 [7620] = \pm 1/52$ [0.012] / -0			

REV
A

50