

MMCX Plug Right Angle to MMCX Plug Right Angle using RG178 Coax Cable (Beryllium Copper Contact)

PE3C9838




Configuration

- Connector 1: MMCX Plug Right Angle
- Connector 2: MMCX Plug Right Angle
- Cable Type: RG178

Features

- Max Frequency 3 GHz
- 70% Phase Velocity
- VSWR of 1.4:1

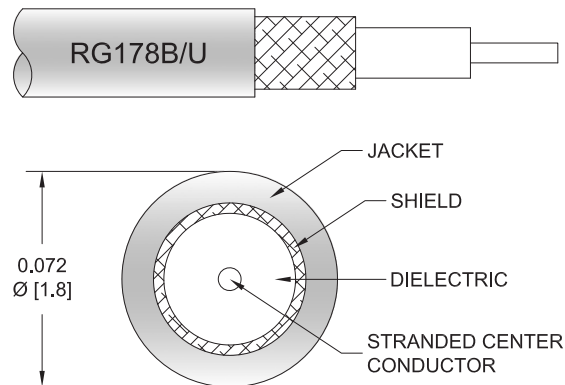

Applications

- General Purpose
- Laboratory Use
- Military
- Aerospace
- Wireless Communications
- General Purpose Test

Description

Pasternack's PE3C9838 MMCX plug right angle to MMCX plug right angle cable using RG178 is part of our full line of RF components available for same-day shipping. This Pasternack MMCX to MMCX cable assembly has a plug to plug gender configuration with 50 ohm RG178. The PE3C9838 MMCX plug to MMCX plug cable assembly operates to 3 GHz. The right angle MMCX interfaces on the RG178 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.13	0.2	0.3	0.4	0.73	dB/ft
	0.43	0.66	0.98	1.31	2.4	dB/m

MMCX Plug Right Angle to MMCX Plug Right Angle using RG178 Coax Cable (Beryllium Copper Contact)



PE3C9838

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB per connector

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.057 lbs [25.85 g]

Cable

Cable Type	RG178
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid

Connectors

Description	Connector 1	Connector 2
Type	MMCX Plug Right Angle	MMCX Plug Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Beryllium Copper, Gold over Copper	Beryllium Copper, Gold over Copper
Body Material and Plating	Beryllium Copper, Copper-Tin-Zinc Alloy	Beryllium Copper, Copper-Tin-Zinc Alloy

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Values at 25°C, sea level.

MMCX Plug Right Angle to MMCX Plug Right Angle using RG178 Coax Cable (Beryllium Copper Contact)



PE3C9838

Typical Performance Data

How to Order

Part Number Configuration:

PE3C9838

- xx

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3C9838-12 = 12 inches long cable
PE3C9838-100cm = 100 cm long cable

MMCX Plug Right Angle to MMCX Plug Right Angle using RG178 Coax Cable (Beryllium Copper Contact) from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MMCX Plug Right Angle to MMCX Plug Right Angle using RG178 Coax Cable \(Beryllium Copper Contact\) PE3C9838](#)

URL: <https://www.pasternack.com/mmcx-plug-right-angle-to-mmcx-plug-non-magnetic-cable-using-rg178-pe3c9838-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

MMCX Plug Right Angle to MMCX Plug Right Angle using RG178 Coax Cable (Beryllium Copper Contact)

