



BMZ Size 8 D38999 Contact Socket to BMZ Size 8 D38999 Contact Socket Cable Using M17/119-RG174 Coax with HeatShrink, LF Solder



PE3M0401

Configuration

- Connector 1: Push-on BMZ Socket
- Connector 2: Push-on BMZ Socket
- Cable Type: M17/119-RG174-0XDS2
- Coax Flex Type: Flexible

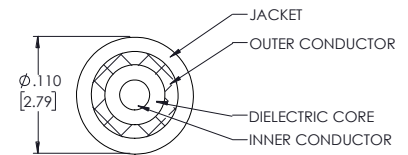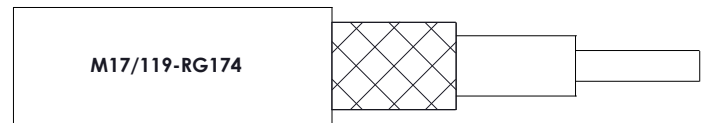

Features

- Max Frequency: 1 GHz
- Can be installed in all D38999 size 8 inserts
- Lot traceability
- High speed RF cable assembly

Applications

- Military and Aerospace
- Avionics
- Industrial Automation

Description

The PE3M0401 from Pasternack is a D38999 cable assembly that is built with a size 8 BMZ Socket contact on one end and a BMZ Socket connector on the other. Pasternack MIL-DTL-38999 (also known as D38999 or 38999) coaxial cable assembly products are used in applications requiring high quality such as laboratory RF test and measurement, rugged and designed for defense/military, production environments, general use, etc. This BMZ to BMZ cable assembly is a part of one of the largest selections of same-day ship coaxial cables for RF, microwave, and millimeter wave interconnect solutions. This high frequency D38999 cable assembly operates at a maximum frequency of 1 GHz.

This radio frequency cable assembly can withstand temperatures ranging from -65 to 85 degrees C. Our BMZ Socket to BMZ Socket cable has a maximum VSWR of 1.4:1. This flexible RF cable assembly with a 0.5-inch diameter has steel as the cable's inner conducting material and PE dielectric type.

BMZ Socket to BMZ Socket cable assembly is built with M17/119-RG174, which is a flexible coax type. The Pasternack PE3M0401 flexible cable assembly has a 50 Ohm impedance and is single shielded. Additional dimensions, specifications, and CAD drawings for this BMZ to BMZ RF cables are available on our downloadable PDF datasheet.

BMZ Socket to BMZ Socket cable assembly is just one of more than one million in-stock RF products available. Pasternack is where to buy high quality custom RF cable assembly products for rugged and MIL-STD designed military/defense, aerospace, outdoor and harsh environment, microwave and millimeter wave radio transmitter receiver, component inter-connection and more for RF test & measurement labs, telecom, phase stable, phase and delay matching, and other radio frequency applications can be manufactured. Variations of BMZ cable assemblies can also be built and will ship on the same day as well, search this website or contact us for assistance. For further information on similar products, our expert technical support and trained sales team can get you the ideal BMZ to BMZ RF cable assembly as per your requirements.

BMZ Size 8 D38999 Contact Socket to BMZ Size 8 D38999 Contact Socket Cable Using M17/119-RG174 Coax with HeatShrink, LF Solder



PE3M0401

Referenced Specifications

| | |
|----------------|---|
| IPC J-STD-001 | Requirements for Soldered Electrical and Electronic Assemblies |
| IPC J-STD-006 | Requirements for Electronic Grade Solder Alloys and Fluxed and Non-Fluxed Solid Solders for Electronic Soldering Applications |
| IPC/WHMA-A-620 | Requirements and Acceptance for Cable and Wire Harness Assemblies |
| MIL-DTL-17 | Cables, Radio Frequency, Flexible and Semirigid, General Specification for |
| MIL-PRF-39012 | Connectors, Coaxial, Radio Frequency, General Specification for |
| MIL-STD-348 | Radio Frequency Connector Interfaces for MIL-DTL-3643, MIL-DTL-3650, MIL-DTL-3655, MIL-DTL-25516, MIL-PRF-31031, MIL-PRF-39012, MIL-PRF-49142, MIL-PRF-55339, MIL-DTL-83517 |
| SAE AS22520 | Crimping Tools, Wire Termination, General Specification For |
| SAE AS23053 | Insulation Sleeving, Electrical, Heat Shrinkable, General Specifications For |
| SAE AS5942 | Marking of Electrical Insulating Materials |
| IPC J-STD-001 | Requirements for Soldered Electrical and Electronic Assemblies |

Material Specifications

| Component | Specification |
|---------------|---|
| Cable | M17/119-RG174 in accordance with MIL-DTL-17 |
| Connector 1 | in accordance with MIL-DTL-38999 |
| Connector 2 | in accordance with MIL-DTL-38999 |
| Heat Shrink 1 | M23053/5-104-0 in accordance with SAE AS23053 |
| Heat Shrink 2 | M23053/5-104-0 in accordance with SAE AS23053 |
| Solder | SAC305 in accordance with J-STD-006 |

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|--------------------------------------|---------|---------------|---------|-----------------|
| Frequency Range | DC | | 1,000 | MHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 65.9 | | % |
| Capacitance | | 32.2 [105.64] | | pF/ft [pF/m] |
| DC Resistance Inner Conductor | | 0.97 [3.18] | | Ω/1000ft [Ω/Km] |
| Dielectric Withstanding Voltage (AC) | | | 2,000 | Vrms |
| Jacket Spark | | | 2,000 | Vrms |

Specifications by Frequency

BMZ Size 8 D38999 Contact Socket to BMZ Size 8 D38999 Contact Socket Cable Using M17/119-RG174 Coax with HeatShrink, LF Solder



PE3M0401

| Part Number | Length | Description | F1 | F2 | F3 | F4 | F5 | Units | Weight (lbs) |
|-------------|--------------------------|-----------------------|-----------|------|------|------|------|-------|--------------|
| | | | Frequency | | 50 | 100 | 250 | 500 | |
| PE3M0401 | Custom Lengths Available | Insertion Loss (Typ.) | 0.07 | 0.01 | 0.13 | 0.28 | 0.45 | dB/ft | |
| | | | 0.22 | 0.04 | 0.43 | 0.93 | 1.48 | dB/m | |
| PE3M0401-6 | 6 inch | Insertion Loss (Typ.) | 0.24 | 0.21 | 0.27 | 0.35 | 0.43 | dB | 0.023 |
| PE3M0401-12 | 12 inch | Insertion Loss (Typ.) | 0.27 | 0.21 | 0.33 | 0.49 | 0.65 | dB | 0.026 |
| PE3M0401-24 | 24 inch | Insertion Loss (Typ.) | 0.33 | 0.22 | 0.46 | 0.77 | 1.1 | dB | 0.032 |
| PE3M0401-36 | 36 inch | Insertion Loss (Typ.) | 0.4 | 0.23 | 0.59 | 1.05 | 1.55 | dB | 0.038 |
| PE3M0401-48 | 48 inch | Insertion Loss (Typ.) | 0.46 | 0.24 | 0.72 | 1.34 | 2 | dB | 0.044 |
| PE3M0401-60 | 60 inch | Insertion Loss (Typ.) | 0.53 | 0.25 | 0.85 | 1.62 | 2.45 | dB | 0.05 |

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

| | |
|-----------------------------|--------------|
| Loss due to Connector 1: | 0.1 dB |
| Loss due to Connector 2: | 0.1 dB |
| Base Weight: | 0.026 pounds |
| Additional Weight per Foot: | 0.006 pounds |

Electrical Specification Notes:
Values at 25°C, sea level.

Mechanical Specifications

Cable Assembly

| Description | Minimum | Typical | Maximum | Units |
|----------------------|---------|---------------|---------|---------|
| Cable Outer Diameter | | 0.11 | | in |
| Weight | | 0.026 [11.79] | | lbs [g] |

Cable Characteristics

| Description | Specification |
|--------------------------------------|-----------------------------|
| Cable Type | M17/119-RG174 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Stranded |
| Inner Conductor Material and Plating | Steel, Copper Clad Aluminum |
| Dielectric Type | PE |
| Number of Shields | 1 |
| Shield Layer 1 | Tinned Copper |
| Jacket Material | PVC |

Connector Characteristics

| Description | Connector 1 | Connector 2 |
|---------------|---------------|---------------|
| Type | BMZ Socket | BMZ Socket |
| Specification | MIL-DTL-38999 | MIL-DTL-38999 |

BMZ Size 8 D38999 Contact Socket to BMZ Size 8 D38999 Contact Socket Cable Using M17/119-RG174 Coax with HeatShrink, LF Solder



PE3M0401

Connector Characteristics

| Description | Connector 1 | Connector 2 |
|--------------------------------------|-----------------------------|-----------------------------|
| Impedance | 50 Ohms | 50 Ohms |
| Configuration | Straight | Straight |
| Connection Method | Push-on | Push-on |
| Contact Size | 8 | 8 |
| Mating Cycles | 500 | 500 |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Dielectric Type | PTFE | PTFE |
| Outer Conductor Material and Plating | Beryllium Copper, Gold | Beryllium Copper, Gold |
| Body Material and Plating | Stainless Steel, Passivated | Stainless Steel, Passivated |

Mechanical Specification Notes:

Environmental Specifications

| Description | Specification |
|-----------------------------|------------------|
| Temperature Operating Range | -65 to +85 deg C |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Values at 25°C, sea level.

BMZ Size 8 D38999 Contact Socket to BMZ Size 8 D38999 Contact Socket Cable Using M17/119-RG174 Coax with HeatShrink, LF Solder



PE3M0401

How to Order

Part Number Configuration:

PE3M0401 - xx uu



Example: PE3M0401-12 = 12 inches long cable
PE3M0401-100cm = 100 cm long cable

Cable Assembly Length Tolerances:

| Imperial English | | Metric | |
|---------------------|-----------------|---------------------|------------------|
| "L" ≤ 1 ft | +0.5 in / -0 in | "L" ≤ 0.3 m | +12.5 mm / -0 mm |
| 1 ft < "L" ≤ 5 ft | +1 in / -0 in | 0.3 m < "L" ≤ 1.5 m | +25 mm / -0 mm |
| 5 ft < "L" ≤ 10 ft | +2 in / -0 in | 1.5 m < "L" ≤ 3 m | +50 mm / -0 mm |
| 10 ft < "L" ≤ 25 ft | +3 in / -0 in | 3 m < "L" ≤ 7.5 m | +75 mm / -0 mm |
| 25 ft < "L" | +2%"L" / -0%"L" | 7.5 m < "L" | +2%"L" / -0%"L" |

* Cable Length = "L"

BMZ Size 8 D38999 Contact Socket to BMZ Size 8 D38999 Contact Socket Cable Using M17/119-RG174 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BMZ Size 8 D38999 Contact Socket to BMZ Size 8 D38999 Contact Socket Cable Using M17/119-RG174 Coax with HeatShrink, LF Solder PE3M0401](https://www.pasternack.com/bmz-8-contact-socket-to-bmz-8-contact-socket-cable-using-m17-119-rg174-0xds2-coax-with-heatshrink-lf-solder-pe3m0401-p.aspx)

URL: <https://www.pasternack.com/bmz-8-contact-socket-to-bmz-8-contact-socket-cable-using-m17-119-rg174-0xds2-coax-with-heatshrink-lf-solder-pe3m0401-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3M0401 CAD Drawing

BMZ Size 8 D38999 Contact Socket to BMZ Size 8 D38999 Contact Socket
Cable Using M17/119-RG174 Coax with HeatShrink, LF Solder

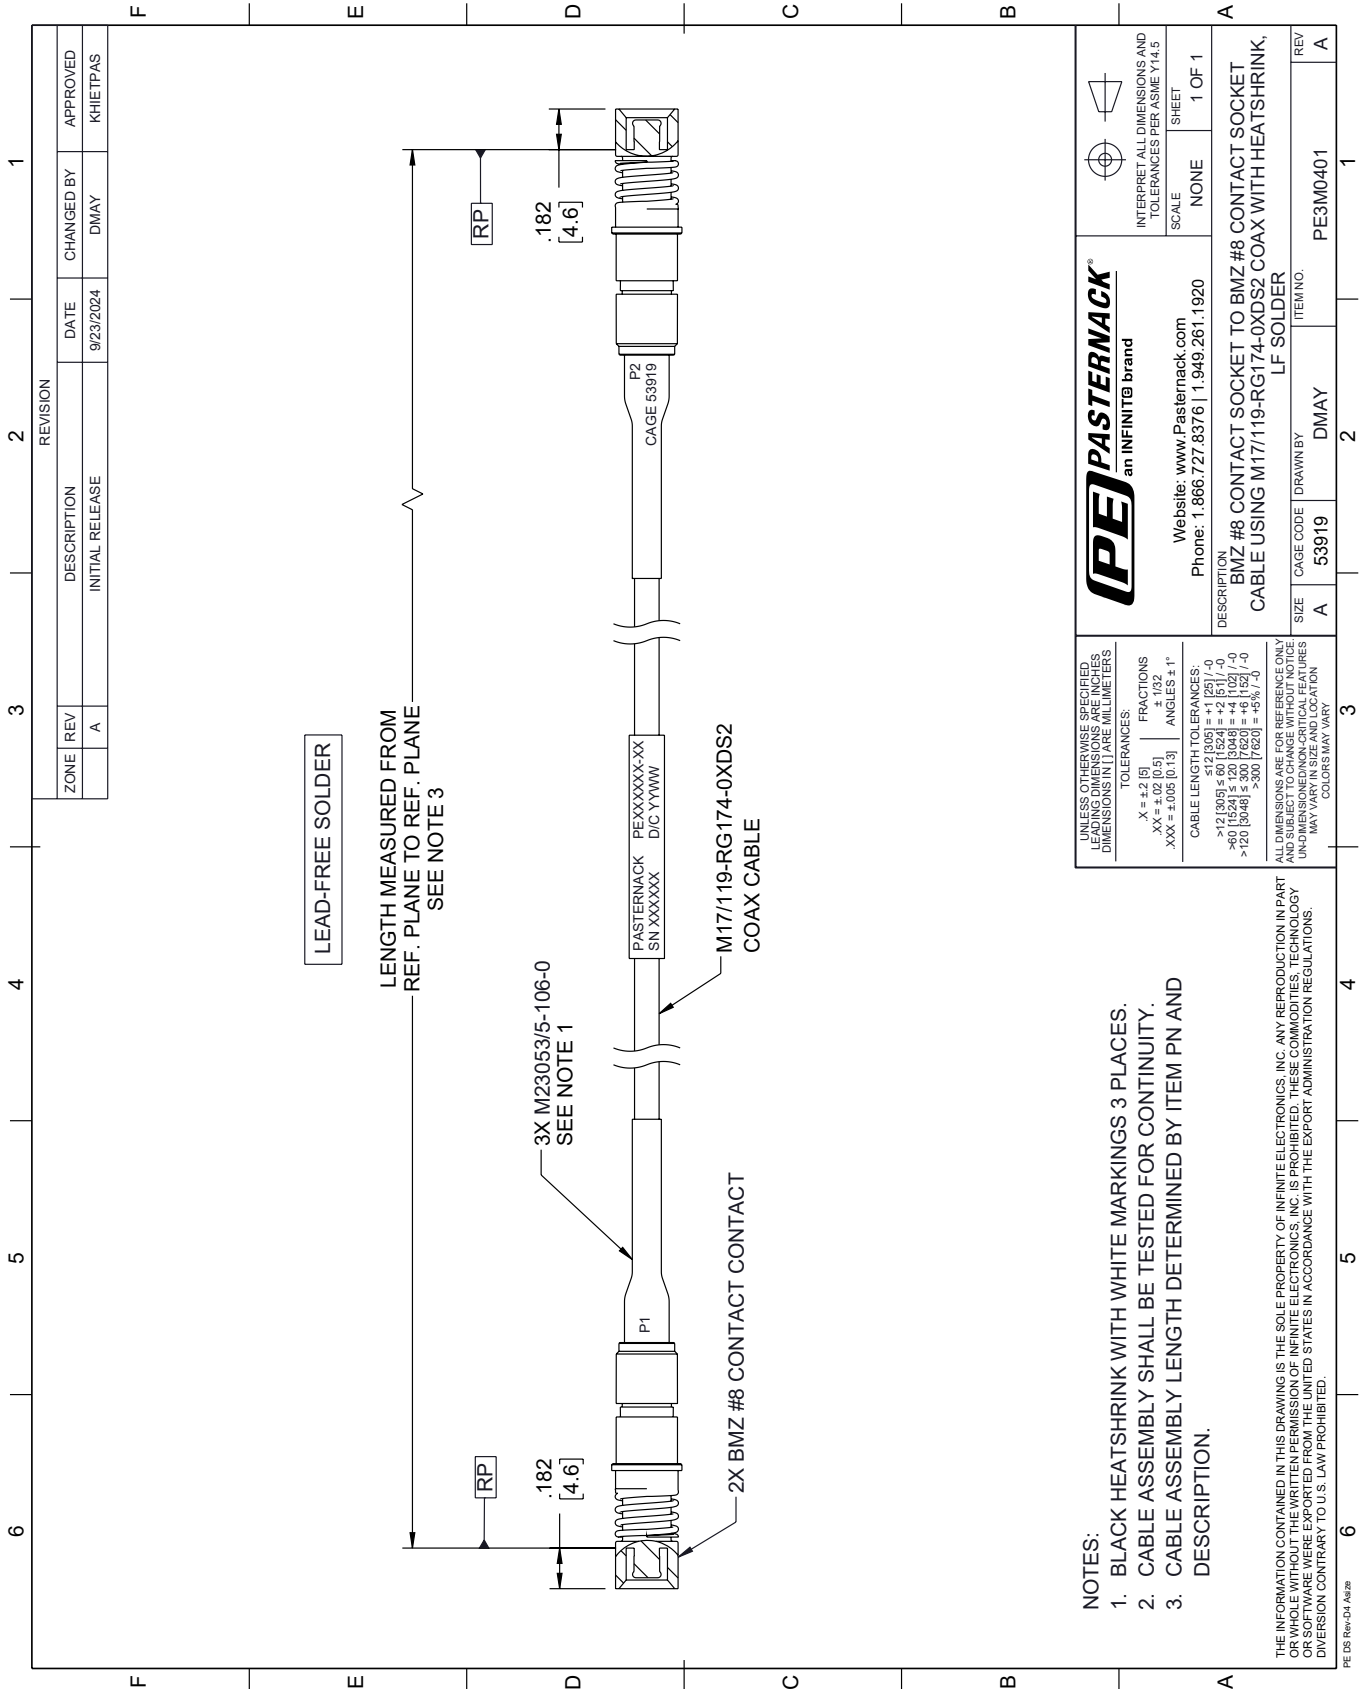

NOTES:

1. BLACK HEATSHRINK WITH WHITE MARKINGS 3 PLACES.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SERVICE ARE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.

TOLERANCES:

| | |
|---------------------|------------------|
| .X = ±.2 [5] | FRACTIONS ± 1/32 |
| .XX = ±.02 [0.5] | ANGLES ± 1° |
| .XXX = ±.005 [0.13] | |

CABLE LENGTH TOLERANCES:

| | |
|-------------------------|-----------|
| <12 [305] | ±.1 [25] |
| >12 [305] ≤ 60 [1524] | ±.2 [51] |
| >60 [1524] ≤ 120 [3048] | ±.4 [102] |
| >120 [3048] | ±.8 [203] |

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS. COLORS MAY VARY.

PE PASTERNAK
an INFINITE brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE
SHEET: 1 OF 1

DESCRIPTION: BMZ #8 CONTACT SOCKET TO BMZ #8 CONTACT SOCKET CABLE USING M17/119-RG174-0XDS2 COAX WITH HEATSHRINK, LF SOLDER

| | |
|-----------|----------|
| SIZE | A |
| CAGE CODE | 53919 |
| DRAWN BY | DMAY |
| ITEM NO. | PE3M0401 |
| REV | A |