



TRB 3-Lug Jack Bulkhead to TRB 3-Lug Jack Bulkhead
1553 Cable Using 124 Ohm TWC-124-2 Coax

RF Cable Assemblies Technical Data Sheet

PE3MSA00662

Configuration

- Connector 1: TRB 3-Lug Jack Bulkhead
- Connector 2: TRB 3-Lug Jack Bulkhead
- Cable Type: TWC-124-2
- Coax Flex Type: Flexible

Features

- Max Frequency 500 MHz
- PVC Jacket
- 124 ohms
- Twinaxial
- MIL-STD-1553B
- -40°C to +80°C
- Lead Free Solder
- Standard and Custom Lengths Available

Applications

- General Purpose
- Laboratory Use
- MIL-STD-1553B Applications
- Data Transmission

Description

Pasternack's PE3MSA00662 78 ohm TRB 3-Lug jack bulkhead to 78 ohm TRB 3-Lug jack bulkhead cable using 124 ohm TWC-124-2 twinax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TRB 3-Lug to TRB 3-Lug cable assembly has a jack to jack gender configuration with 124 ohm flexible TWC-124-2 twinax. The PE3MSA00662 TRB 3-Lug jack to TRB 3-Lug jack cable assembly operates to 500 MHz. Our RF cable assembly with TRB 3-Lug bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TRB 3-Lug Jack Bulkhead to TRB 3-Lug Jack Bulkhead 1553 Cable Using 124 Ohm TWC-124-2 Coax PE3MSA00662](#)



TRB 3-Lug Jack Bulkhead to TRB 3-Lug Jack Bulkhead
1553 Cable Using 124 Ohm TWC-124-2 Coax

RF Cable Assemblies Technical Data Sheet

PE3MSA00662

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		500	MHz
Capacitance		12.3 [40.35]		pF/ft [pF/m]
Operating Voltage (AC)			1,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	10	50	100	200	500	MHz
Insertion Loss (Typ.)	0.017	0.036	0.051	0.072	0.114	dB/ft
	0.06	0.12	0.17	0.24	0.37	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.1928 lbs [87.45 g]

Cable

Cable Type TWC-124-2
Impedance 124 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper, Silver
Dielectric Type PE
Shield Layer 1 Silver Plated Copper
Jacket Material PVC, Blue

One Time Minimum Bend Radius 1.25 in [31.75 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TRB 3-Lug Jack Bulkhead to TRB 3-Lug Jack Bulkhead 1553 Cable Using 124 Ohm TWC-124-2 Coax PE3MSA00662](#)



TRB 3-Lug Jack Bulkhead to TRB 3-Lug Jack Bulkhead
1553 Cable Using 124 Ohm TWC-124-2 Coax

RF Cable Assemblies Technical Data Sheet

PE3MSA00662

Connectors

Description	Connector 1	Connector 2
Type	TRB 3-Lug Jack Bulkhead Bayonet	TRB 3-Lug Jack Bulkhead Bayonet
Specification	MIL-STD-1553	MIL-STD-1553
Impedance	78 Ohms	78 Ohms
Contact Material and Plating	Bronze, Gold 30 micro inches	Bronze, Gold 30 micro inches
Contact Plating Specification	ASTM-B-488	ASTM-B-488
Dielectric Type	Teflon	Teflon
Outer Conductor Material and Plating	Phosphor Bronze, Gold	Phosphor Bronze, Gold
Outer Conductor Plating Specification	30 micro inches	30 micro inches
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	ASTM-B-733	ASTM-B-733

Environmental Specifications

Temperature

Operating Range

-40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TRB 3-Lug Jack Bulkhead to TRB 3-Lug Jack Bulkhead 1553 Cable Using 124 Ohm TWC-124-2 Coax PE3MSA00662](#)



TRB 3-Lug Jack Bulkhead to TRB 3-Lug Jack Bulkhead
1553 Cable Using 124 Ohm TWC-124-2 Coax

RF Cable Assemblies Technical Data Sheet

PE3MSA00662

How to Order

Part Number Configuration:

PE3MSA00662

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3MSA00662-12 = 12 inches long cable
PE3MSA00662-100cm = 100 cm long cable

TRB 3-Lug Jack Bulkhead to TRB 3-Lug Jack Bulkhead 1553 Cable Using 124 Ohm TWC-124-2 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TRB 3-Lug Jack Bulkhead to TRB 3-Lug Jack Bulkhead 1553 Cable Using 124 Ohm TWC-124-2 Coax PE3MSA00662](https://www.pasternack.com/trb-3-lug-jack-bulkhead-to-trb-3-lug-jack-bulkhead-1553-cable-using-twc-124-2-coax-pe3msa00662)


URL: <https://www.pasternack.com/trb-3-lug-jack-bulkhead-to-trb-3-lug-jack-bulkhead-1553-cable-using-twc-124-2-pe3msa00662-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3MSA00662 CAD Drawing


TRB 3-Lug Jack Bulkhead to TRB 3-Lug Jack Bulkhead
1553 Cable Using 124 Ohm TWC-124-2 Coax

LEAD FREE SOLDER

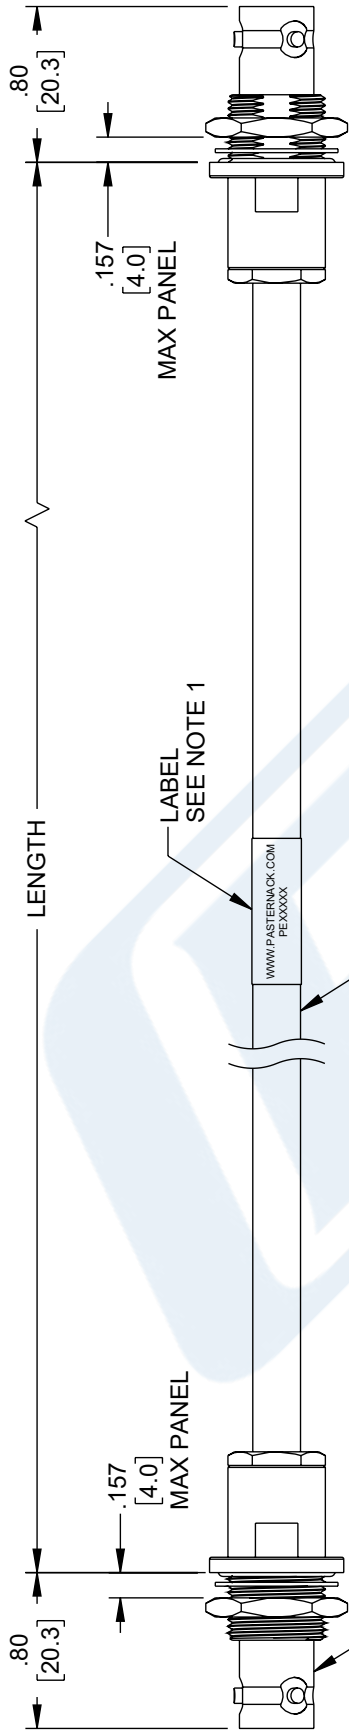


TWC-124-2, 124 OHM TWINAX CABLE
JACKET: PVC, BLUE
NOM. DIA: .245" [6.22]

2X TRB 3-LUG JACK
NON-ISOLATED,
BULKHEAD

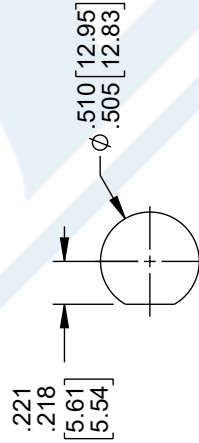

RECOMMENDED
PANEL CUTOUT

ITEM NUMBER	LENGTH	
	FEET	METERS
PE3MSA00662-12	1.0	.31
PE3MSA00662-24	2.0	.61
PE3MSA00662-36	3.0	.92
PE3MSA00662-48	4.0	1.22
PE3MSA00662-60	5.0	1.52



NOTES:

- CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
- CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PASTERNAK
an INFINITO brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [5]
XX = ±.02 [.5]
XXX = ±.005 [.13]
ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = ±1 [25] / -0
>12 [305] ≤ 60 [1524] = ±2 [51] / -0
>60 [1524] ≤ 120 [3048] = ±4 [102] / -0
>120 [3048] ≤ 300 [7620] = ±6 [152] / -0
>300 [7620] = ±5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE

SHEET: 1 OF 1

DESCRIPTION: ROHS LAB RATED 124 OHM 1553 TWINAX TRB BULKHEAD JACK - BULKHEAD JACK

SIZE: A

CAGE CODE: 53919

DRAWN BY: DMAY

ITEM NO.: PE3MSA00662

REV: A