N Male to N Male Right Angle Low Loss Cable Using LMR-400 Coax with HeatShrink

PE3W00430/HS

Configuration

- Connector 1: N Male
- Connector 2: N Male Right Angle
- Cable Type: LMR-400
- Coax Flex Type: Flexible

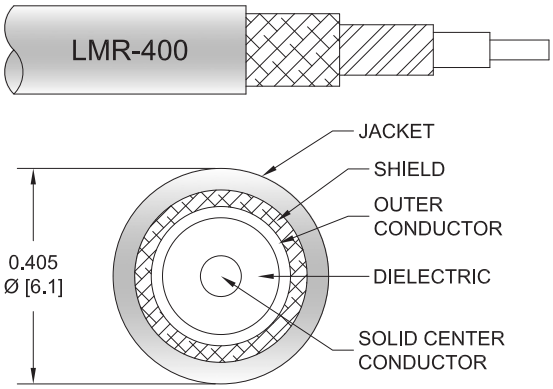

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- PE Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W00430/HS type N male to type N male right angle cable using LMR-400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400 coax. The PE3W00430/HS type N male to type N male cable assembly operates to 6 GHz. The right angle type N interface on the LMR-400 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.39 [4.56]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ohms/1000ft [Ohms/Km]

+1 (866) 558-2786 | sales@pasternack.com | pasternack.com

N Male to N Male Right Angle Low Loss Cable Using LMR-400 Coax with HeatShrink

PE3W00430/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Jacket Spark			8,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3W00430/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.02	0.028	0.041	0.068	0.093	dB/ft	
			0.07	0.1	0.14	0.23	0.31	dB/m	
PE3W00430/HS-12	12 inch	Insertion Loss (Typ.)	0.32	0.33	0.35	0.37	0.4	dB	0.247
PE3W00430/HS-24	24 inch	Insertion Loss (Typ.)	0.34	0.36	0.39	0.44	0.49	dB	0.315
PE3W00430/HS-36	36 inch	Insertion Loss (Typ.)	0.36	0.39	0.43	0.51	0.58	dB	0.382
PE3W00430/HS-48	48 inch	Insertion Loss (Typ.)	0.38	0.42	0.47	0.58	0.68	dB	0.449
PE3W00430/HS-60	60 inch	Insertion Loss (Typ.)	0.4	0.44	0.51	0.64	0.77	dB	0.516

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1	dB
Loss due to Connector 2:	0.2	dB
Base Weight:	0.247	pounds
Additional Weight per Inch:	0.00559	pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.192 lbs [87.09 g]

Cable

Cable Type	LMR-400
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.405 in [10.29 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.5 lbs-ft [0.68 N-m]
Flat Plate Crush	40 lbs/in [0.71 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

N Male to N Male Right Angle Low Loss Cable Using LMR-400 Coax with HeatShrink

PE3W00430/HS

Connectors

Description	Connector 1	Connector 2
Type	N Male	N Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Brass, Silver	Brass, Gold
Contact Plating Specification	70µ in. minimum	30µ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Tri-Metal
Body Plating Specification	100µ in. minimum	
Coupling Nut Material and Plating	Brass, Nickel	Brass, Tri-Metal
Coupling Nut Plating Specification	100µ in. minimum	
Hex Size		18 mm
Torque		9 in-lbs 1.02 Nm

Environmental Specifications

Operating Range Temperature	-40 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

+1 (866) 558-2786 | sales@pasternack.com | pasternack.com

N Male to N Male Right Angle Low Loss Cable Using LMR-400 Coax with HeatShrink

PE3W00430/HS

Typical Performance Data

How to Order

Part Number Configuration: **PE3W00430/HS - xx uu**

- uu — Unit of Measure:
  - cm = Centimeters
  - <blank> = Inches
- xx — Length
- PE3W00430/HS — Base Number

Example: PE3W00430/HS-12 = 12 inches long cable
PE3W00430/HS-100cm = 100 cm long cable

N Male to N Male Right Angle Low Loss Cable Using LMR-400 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to N Male Right Angle Low Loss Cable Using LMR-400 Coax with HeatShrink PE3W00430/HS

URL: https://www.pasternack.com/n-male-to-n-male-low-loss-cable-using-lmr-400-with-heatshrink-pe3w00430-hs-p.aspx

PE3W00430/HS CAD Drawing

N Male to N Male Right Angle Low Loss Cable Using LMR-400 Coax with HeatShrink