

## MCX Plug to BNC Male Cable Using RG316 Coax



### RF Cable Assemblies Technical Data Sheet



**PE3W00602**

#### Configuration

- Connector 1: MCX Plug
- Connector 2: BNC Male
- Cable Type: RG316

#### Features

- Max Frequency 3 GHz
- FEP Jacket

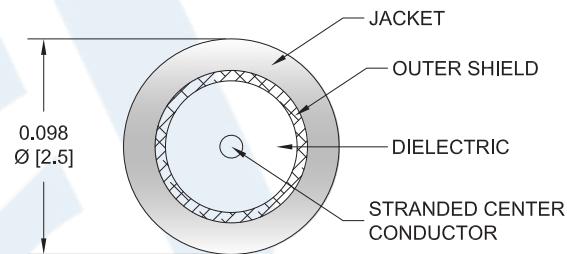

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W00602 MCX plug to BNC male cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MCX to BNC cable assembly has a plug to male gender configuration with 50 ohm flexible RG316 coax. The PE3W00602 MCX plug to BNC male cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug to BNC Male Cable Using RG316 Coax PE3W00602](#)



## MCX Plug to BNC Male Cable Using RG316 Coax

**RF Cable Assemblies Technical Data Sheet**
**PE3W00602**
**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Capacitance	32 [104.99]			pF/ft [pF/m]

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.11	0.16	0.238	0.38	0.58	dB/ft
	0.36	0.52	0.78	1.25	1.9	dB/m

**Electrical Specification Notes:**

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the MCX plug connector and 0.2 dB for the BNC male connector.

**Mechanical Specifications**
**Cable Assembly**

Weight	0.061 lbs [27.67 g]
--------	---------------------

**Cable**

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver PTFE
Dielectric Type	1
Number of Shields	Silver Plated Copper Braid
Shield Layer 1	FEP, Tan
Jacket Material	0.098 in [2.49 mm]
Jacket Diameter	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug to BNC Male Cable Using RG316 Coax PE3W00602](#)



## MCX Plug to BNC Male Cable Using RG316 Coax

### RF Cable Assemblies Technical Data Sheet

**PE3W00602**

#### Connectors

Description	Connector 1	Connector 2
Type	MCX Plug	BNC Male
Specification	CECC 22220	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 $\mu$ in. minimum	30 $\mu$ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 $\mu$ in. minimum	100 $\mu$ in. minimum
Coupling Nut Material and Plating		Brass, Nickel

#### Environmental Specifications

##### Temperature

Operating Range

-55 to +155 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug to BNC Male Cable Using RG316 Coax PE3W00602](#)

## MCX Plug to BNC Male Cable Using RG316 Coax

**RF Cable Assemblies Technical Data Sheet****PE3W00602****How to Order**

Part Number Configuration:

**PE3W00602**- **xx****uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches

Length  
Base Number

Example: PE3W00602-12 = 12 inches long cable  
PE3W00602-100cm = 100 cm long cable

MCX Plug to BNC Male Cable Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug to BNC Male Cable Using RG316 Coax PE3W00602](#)

URL: <https://www.pasternack.com/mcx-plug-to-bnc-male-cable-using-rg316-pe3w00602-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

## PE3W00602 CAD Drawing

© 2020 Pasternack Enterprises All Rights Reserved

© 2020 Pasternack Enterprises. All Rights Reserved. PE3W00602 REV 1.0

