

N Male to SMA Male Right Angle Low Loss Cable
Using LMR-240 Coax with Double HeatShrink




RF Cable Assemblies Technical Data Sheet

PE3W01371/HS2


Configuration

- Connector 1: N Male
- Connector 2: SMA Male Right Angle
- Cable Type: LMR-240



Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

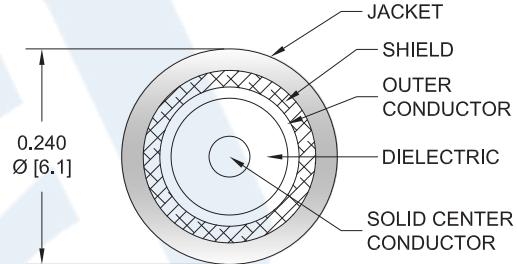

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W01371/HS2 type N male to SMA male right angle cable using LMR-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240 coax. The PE3W01371/HS2 type N male to SMA male cable assembly operates to 5.8 GHz. The right angle SMA interface on the LMR-240 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male Right Angle Low Loss Cable Using LMR-240 Coax with Double Heat-Shrink PE3W01371/HS2](#)

N Male to SMA Male Right Angle Low Loss Cable Using LMR-240 Coax with Double HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W01371/HS2

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		3.2 [10.5]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ω/1000ft [Ω/Km]
Jacket Spark			5,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.039	0.055	0.079	0.129	0.204	dB/ft
	0.13	0.18	0.26	0.42	0.67	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the N male connector and 0.2 dB for the SMA male connector.

Mechanical Specifications

Cable Assembly

Weight 0.142 lbs [64.41 g]

Cable

Cable Type LMR-240
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper
Dielectric Type PE (F)
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material PE, Black
Jacket Diameter 0.24 in [6.1 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male Right Angle Low Loss Cable Using LMR-240 Coax with Double Heat-Shrink PE3W01371/HS2](#)

N Male to SMA Male Right Angle Low Loss Cable Using LMR-240 Coax with Double HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W01371/HS2

One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.25 lbs-ft [0.34 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

Connectors

Description	Connector 1	Connector 2
Type	N Male	SMA Male Right Angle
Specification	MIL-STD-348	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification		50 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Gold
Body Plating Specification		3 μ in minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Gold
Coupling Nut Plating Specification		3 μ in minimum
Hex Size		5/16 inch
Torque		3 in-lbs [0.34 Nm]

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male Right Angle Low Loss Cable Using LMR-240 Coax with Double Heat-Shrink PE3W01371/HS2](#)

N Male to SMA Male Right Angle Low Loss Cable
Using LMR-240 Coax with Double HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W01371/HS2

How to Order

Part Number Configuration:

PE3W01371/HS2

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W01371/HS2-12 = 12 inches long cable
PE3W01371/HS2-100cm = 100 cm long cable

N Male to SMA Male Right Angle Low Loss Cable Using LMR-240 Coax with Double HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to SMA Male Right Angle Low Loss Cable Using LMR-240 Coax with Double HeatShrink PE3W01371/HS2](#)


URL: <https://www.pasternack.com/n-male-to-sma-male-low-loss-cable-using-lmr-240-with-double-heatshrink-pe3w01371-hs2-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W01371/HS2 CAD Drawing

N Male to SMA Male Right Angle Low Loss Cable Using
LMR-240 Coax with Double HeatShrink

F E D C B A

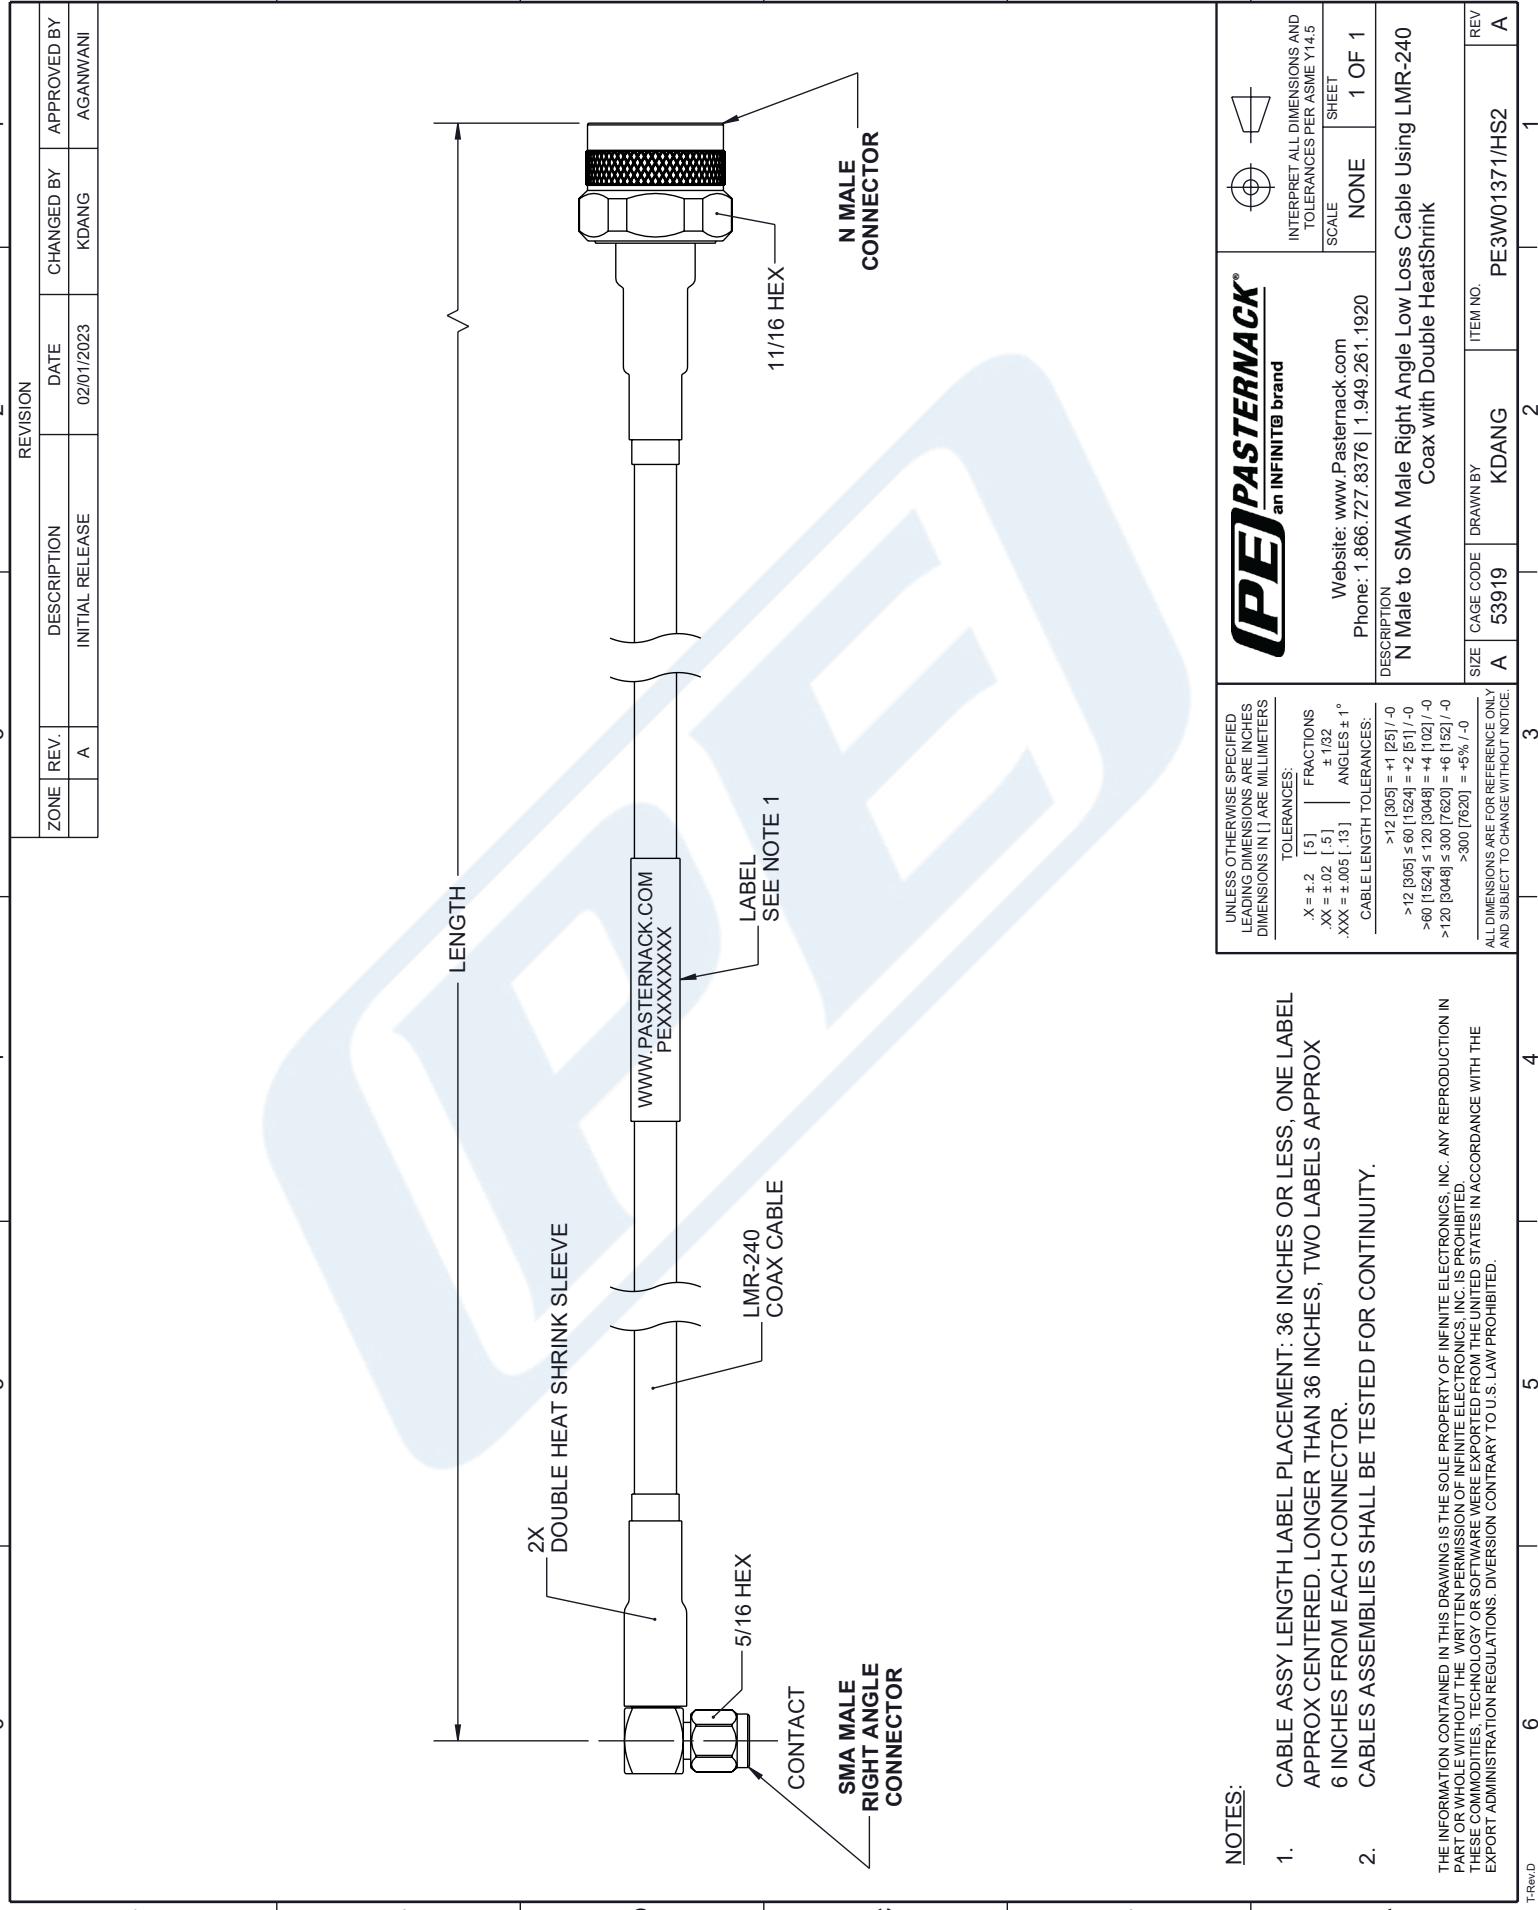

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE	
XX = ± 0.2 [.5]	FRACTIONS XX = ± 0.05 [.13]
XXX = ± 0.005 [.013]	ANGLES ± ° CABLE LENGTH TOLERANCES:
>12 [305] = +1 [25] / -0 >12 [305] >80 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.	
SIZE	CAGE CODE
A	53919
DRAWN BY	KDANG
ITEM NO.	PE3W01371/HS2
REV	A