



MCX Plug Right Angle to BNC Female 4 Hole Flange Cable Using RG316-DS Coax

RF Cable Assemblies Technical Data Sheet


PE3W01570

Configuration

- Connector 1: MCX Plug Right Angle
- Connector 2: BNC Female 4 Hole Flange
- Cable Type: RG316-DS

Features

- Max Frequency 2 GHz
- 70% Phase Velocity
- Double Shielded
- FEP Jacket

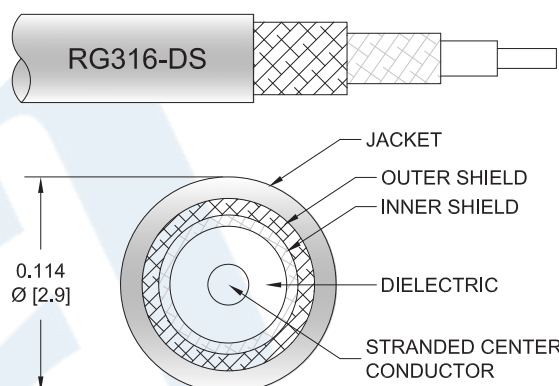

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W01570 MCX plug right angle to BNC female 4 hole flange cable using RG316-DS coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MCX to BNC cable assembly has a plug to female gender configuration with 50 ohm flexible RG316-DS coax. The PE3W01570 MCX plug to BNC female cable assembly operates to 2 GHz. The right angle MCX interface on the RG316-DS cable allows for easier connections in tight spaces. Our RF cable assembly with BNC 4 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
VSWR			1.4:1	
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to BNC Female 4 Hole Flange Cable Using RG316-DS Coax PE3W01570](#)



MCX Plug Right Angle to BNC Female 4 Hole Flange Cable Using RG316-DS Coax

RF Cable Assemblies Technical Data Sheet

PE3W01570

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	2	GHz
Insertion Loss (Max.)	0.08	0.12	0.18	0.26	0.37	dB/ft
	0.26	0.39	0.59	0.85	1.21	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1dB per connector.

Mechanical Specifications

Cable Assembly

Diameter 0.7 in [17.78 mm]

Weight 0.08 lbs [36.29 g]

Cable

Cable Type RG316-DS
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 2
 Shield Layer 1 Silver Plated Copper Braid
 Shield Layer 2 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.114 in [2.9 mm]

One Time Minimum Bend Radius 0.59 in [14.99 mm]

Connectors

Description	Connector 1	Connector 2
Type	MCX Plug Right Angle	BNC Female 4 Hole Flange
Specification		MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating		Beryllium Copper, Gold
Dielectric Type		PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to BNC Female 4 Hole Flange Cable Using RG316-DS Coax PE3W01570](#)



MCX Plug Right Angle to BNC Female 4 Hole Flange Cable Using RG316-DS Coax

RF Cable Assemblies Technical Data Sheet


PE3W01570

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

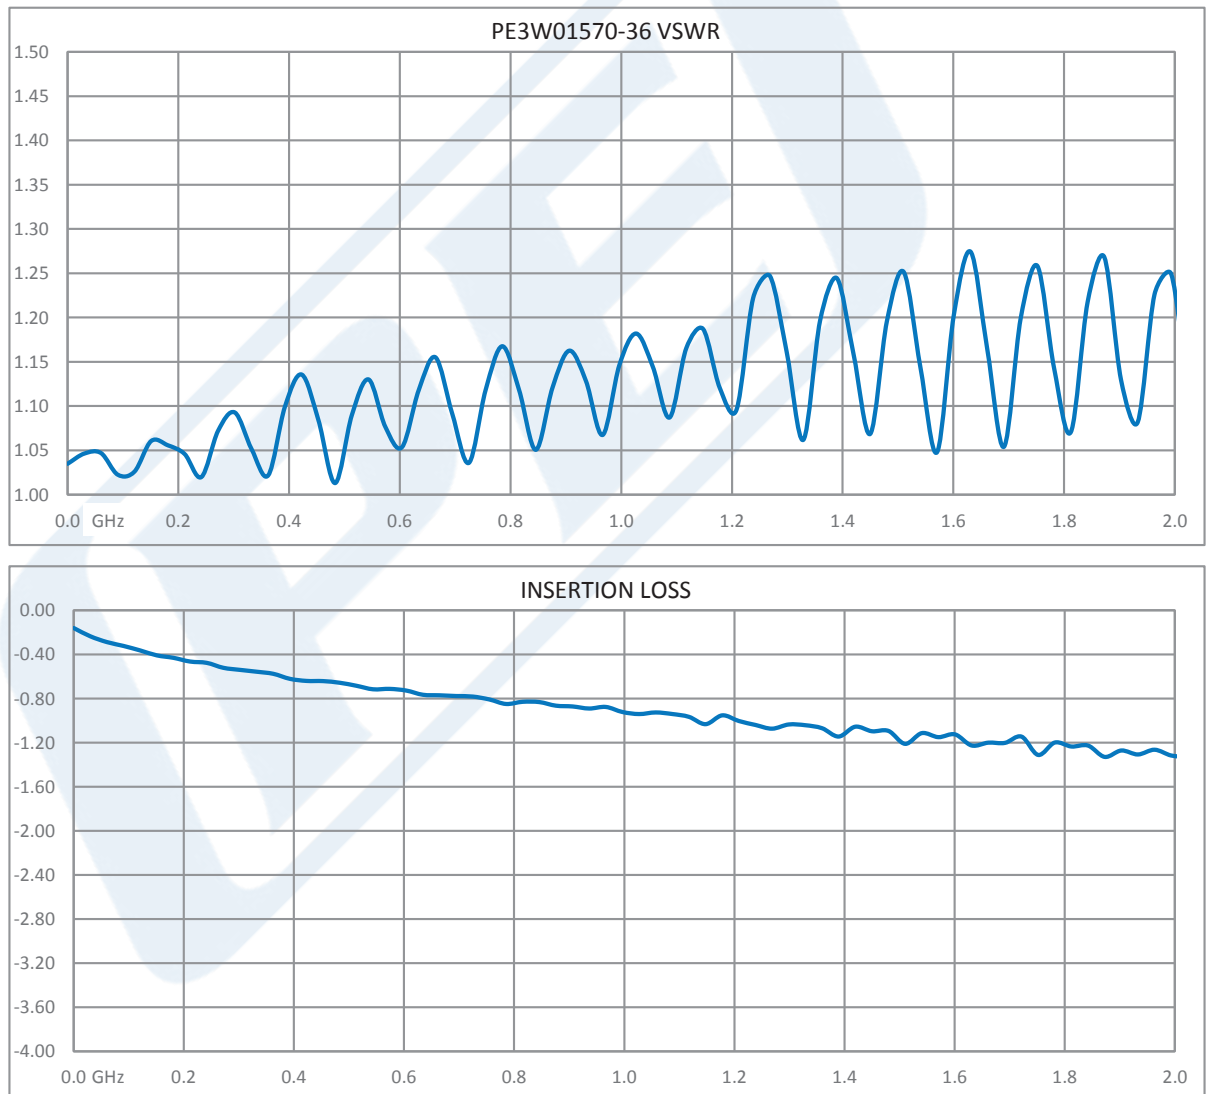

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to BNC Female 4 Hole Flange Cable Using RG316-DS Coax PE3W01570](#)



MCX Plug Right Angle to BNC Female 4 Hole Flange Cable Using RG316-DS Coax

RF Cable Assemblies Technical Data Sheet

PE3W01570

How to Order

Part Number Configuration:

PE3W01570

- **xx**

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3W01570-12 = 12 inches long cable
PE3W01570-100cm = 100 cm long cable

MCX Plug Right Angle to BNC Female 4 Hole Flange Cable Using RG316-DS Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to BNC Female 4 Hole Flange Cable Using RG316-DS Coax PE3W01570](https://www.pasternack.com/mcx-plug-right-angle-to-bnc-female-4-hole-flange-cable-using-rg316-ds-coax-pe3w01570)

URL: <https://www.pasternack.com/mcx-plug-bnc-female-rg316-ds-cable-assembly-pe3w01570-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W01570 CAD Drawing

MCX Plug Right Angle to BNC Female 4 Hole Flange Cable Using RG316-DS Coax

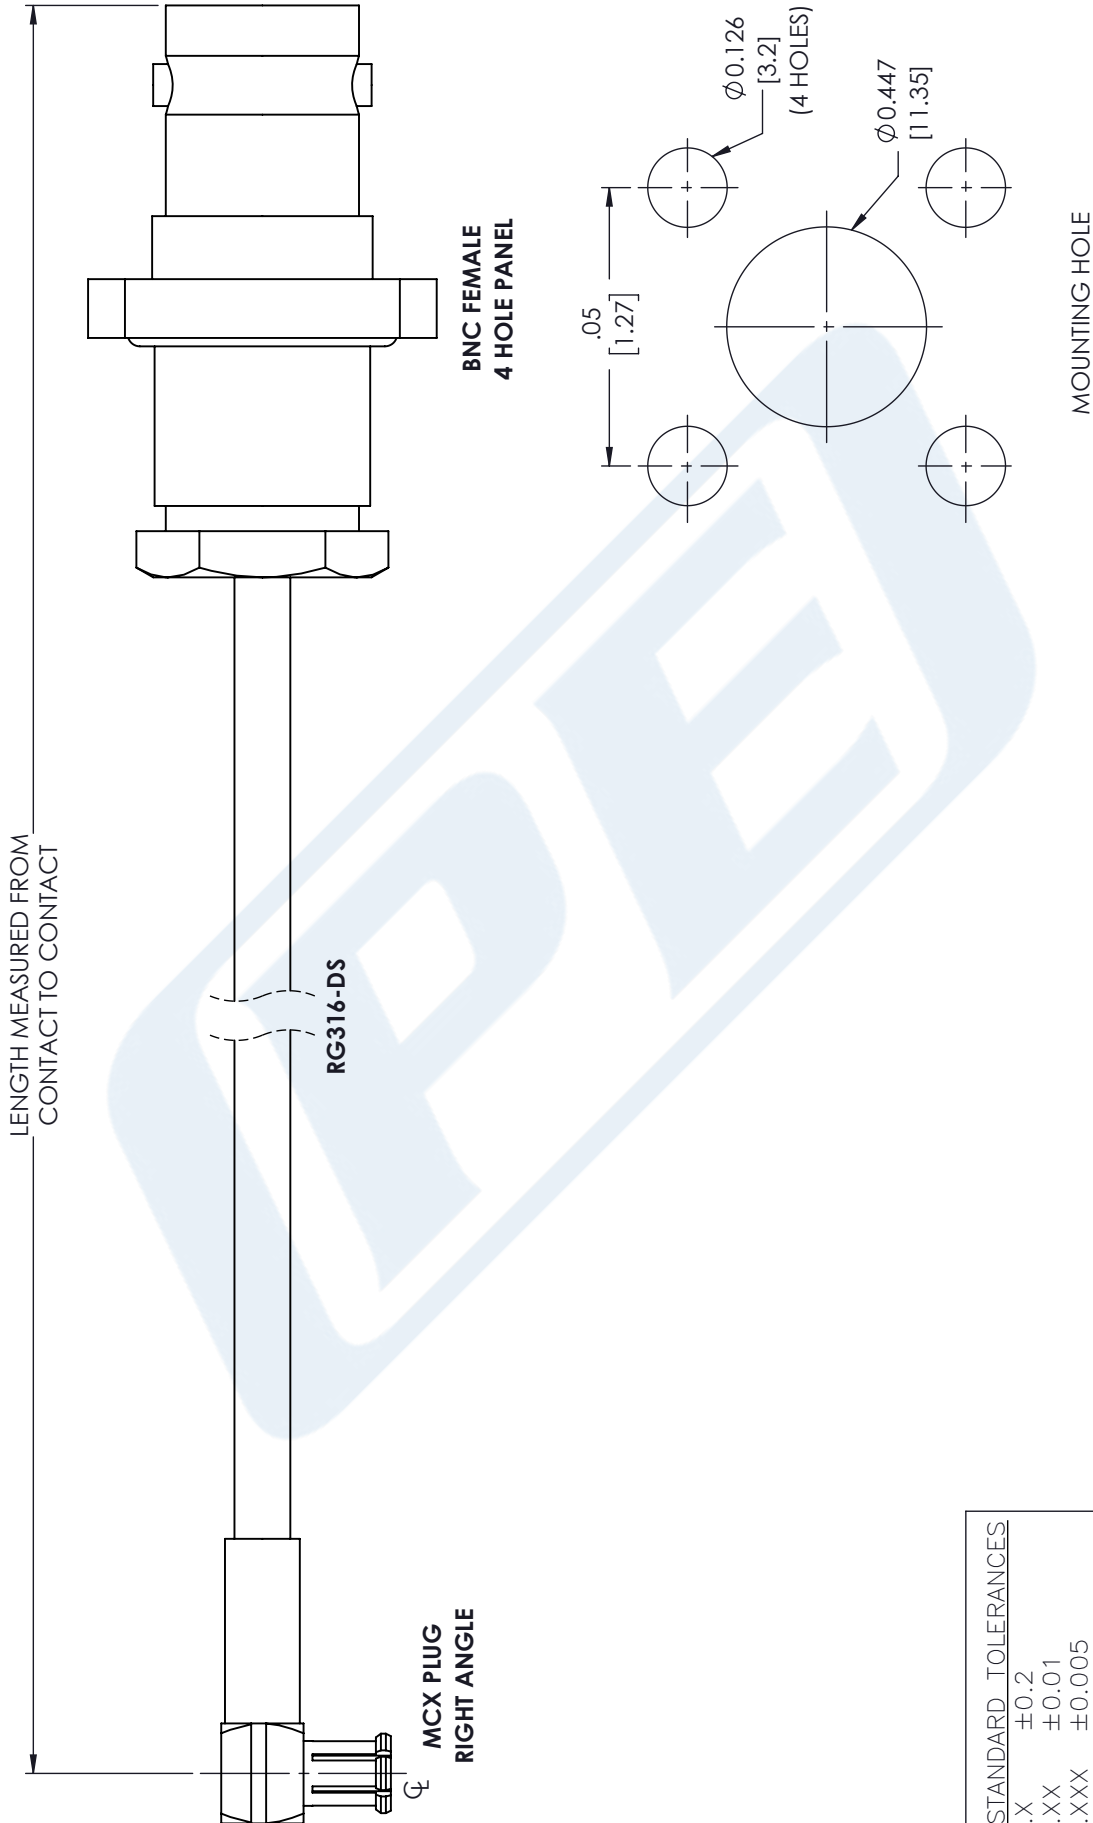

STANDARD TOLERANCES	
.X	± 0.2
.XX	± 0.01
.XXX	± 0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE3W01570

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 06/14/18

SCALE N/A

SIZE A

CN2379