



Reverse Polarity TNC Plug to N Male Low Loss Cable Using LMR-400-UF Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet


PE3W01868/HS

Configuration

- Connector 1: TNC Plug Reverse Polarity
- Connector 2: N Male
- Cable Type: LMR-400-UF

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- TPE Jacket

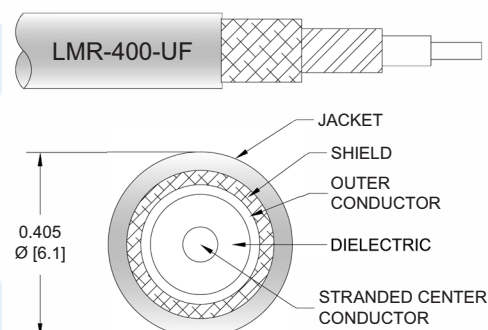

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W01868/HS reverse polarity TNC plug to type N male cable using LMR-400-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack reverse polarity TNC to type N cable assembly has a plug to male gender configuration with 50 ohm flexible LMR-400-UF coax. The PE3W01868/HS reverse polarity TNC plug to type N male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Plug to N Male Low Loss Cable Using LMR-400-UF Coax with Heat-Shrink PE3W01868/HS](#)



Reverse Polarity TNC Plug to N Male Low Loss Cable Using LMR-400-UF Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W01868/HS

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range | DC | | 5.8 | GHz |
| VSWR | | | 1.4:1 | |
| Velocity of Propagation | | 85 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.2 [3.94] | | ns/ft [ns/m] |
| Capacitance | | 23.9 [78.41] | | pF/ft [pF/m] |
| Inductance | | 0.06 [0.2] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 1.07 [3.51] | | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor | | 1.65 [5.41] | | Ω/1000ft [Ω/Km] |
| Jacket Spark | | | 8,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-------|-------|-------|-------|------|-------|
| Frequency | 0.25 | 0.5 | 1 | 2.5 | 5.8 | GHz |
| Insertion Loss (Typ.) | 0.023 | 0.034 | 0.049 | 0.081 | 0.13 | dB/ft |
| | 0.08 | 0.11 | 0.16 | 0.27 | 0.43 | dB/m |

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.219 lbs [99.34 g]

Cable

Cable Type LMR-400-UF
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper
 Dielectric Type PE (F)
 Number of Shields 2
 Shield Layer 1 Aluminum Tape
 Shield Layer 2 Tinned Copper Braid
 Jacket Material TPE, Black
 Jacket Diameter 0.405 in [10.29 mm]

One Time Minimum Bend Radius 1 in [25.4 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Plug to N Male Low Loss Cable Using LMR-400-UF Coax with Heat-Shrink PE3W01868/HS](#)



Reverse Polarity TNC Plug to N Male Low Loss Cable Using LMR-400-UF Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W01868/HS

| | |
|------------------------------|------------------------|
| Repeated Minimum Bend Radius | 4 in [101.6 mm] |
| Bending Moment | 0.38 lbs-ft [0.52 N-m] |
| Flat Plate Crush | 20 lbs/in [0.36 Kg/mm] |
| Tensile Strength | 160 lbs [72.57 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|-----------------------------------|---------------------------|------------------|
| Type | TNC Plug Reverse Polarity | N Male |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Phosphor Bronze, Gold | Brass, Gold |
| Contact Plating Specification | | 15 µin minimum |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Nickel | Brass, Tri-Metal |
| Coupling Nut Material and Plating | Brass, Nickel | Brass, Tri-Metal |
| Hex Size | | 18 mm |

Environmental Specifications

Temperature

| | |
|-----------------|------------------|
| Operating Range | -40 to +85 deg C |
|-----------------|------------------|

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Plug to N Male Low Loss Cable Using LMR-400-UF Coax with Heat-Shrink PE3W01868/HS](#)



Reverse Polarity TNC Plug to N Male Low Loss Cable Using LMR-400-UF Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W01868/HS

How to Order

Part Number Configuration:

PE3W01868/HS

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W01868/HS-12 = 12 inches long cable
PE3W01868/HS-100cm = 100 cm long cable

Reverse Polarity TNC Plug to N Male Low Loss Cable Using LMR-400-UF Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Plug to N Male Low Loss Cable Using LMR-400-UF Coax with HeatShrink PE3W01868/HS](https://www.pasternack.com/reverse-polarity-tnc-plug-to-n-male-low-loss-cable-using-lmr-400-uf-with-heatshrink-pe3w01868-hs)

URL: <https://www.pasternack.com/reverse-polarity-tnc-plug-to-n-male-low-loss-cable-using-lmr-400-uf-with-heatshrink-pe3w01868-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W01868/HS CAD Drawing

Reverse Polarity TNC Plug to N Male Low Loss Cable

Using LMR-400-UF Coax with HeatShrink

