



## N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-100 Coax with HeatShrink

### TECHNICAL DATA SHEET


**PE3W01922/HS**

#### Configuration

- Connector 1: N Male Right Angle
- Connector 2: TNC Male Right Angle
- Cable Type: LMR-100A
- Coax Flex Type: Flexible

#### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

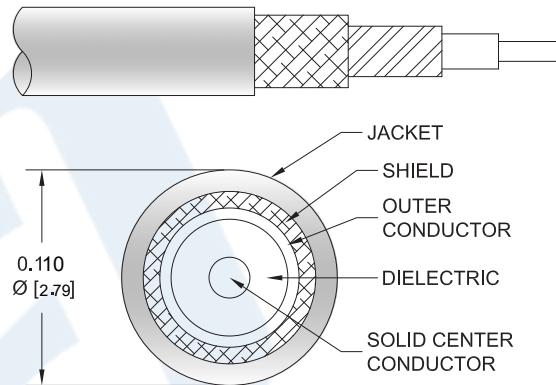

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W01922/HS type N male right angle to TNC male right angle cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-100A coax. The PE3W01922/HS type N male to TNC male cable assembly operates to 6 GHz. The right angle type N and right angle TNC interfaces on the LMR-100A cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W01922/HS](#)



## N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-100 Coax with HeatShrink

### TECHNICAL DATA SHEET

**PE3W01922/HS**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
Jacket Spark			2,000	Vrms

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3W01922/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.12	0.17	0.24	0.4	0.64	dB/ft	
			0.38	0.55	0.79	1.31	2.11	dB/m	
PE3W01922/HS-24	24 inch	Insertion Loss (Typ.)	0.63	0.73	0.88	1.2	1.69	dB	0.174
PE3W01922/HS-36	36 inch	Insertion Loss (Typ.)	0.75	0.9	1.12	1.6	2.33	dB	0.183
PE3W01922/HS-48	48 inch	Insertion Loss (Typ.)	0.86	1.06	1.36	2	2.97	dB	0.192
PE3W01922/HS-100CM	100 cm	Insertion Loss (Typ.)	0.78	0.95	1.19	1.71	2.51	dB	0.186
PE3W01922/HS-200CM	200 cm	Insertion Loss (Typ.)	1.16	1.49	1.98	3.02	4.61	dB	0.216

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.165 pounds
Additional Weight per Inch:	0.00075 pounds

#### Mechanical Specifications

##### Cable Assembly

Weight	0.165 lbs [74.84 g]
--------	---------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W01922/HS](#)



## N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-100 Coax with HeatShrink

### TECHNICAL DATA SHEET

**PE3W01922/HS**

#### Cable

Cable Type	LMR-100A
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]

One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle Threaded	TNC Male Right Angle Threaded
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	POM
Body Material and Plating	Brass, Tri-Metal	Brass, Nickel
Coupling Nut Material and Plating	Brass, Tri-Metal	

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +85 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W01922/HS](#)




## N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-100 Coax with HeatShrink

### TECHNICAL DATA SHEET

**PE3W01922/HS**

#### How to Order

Part Number Configuration:

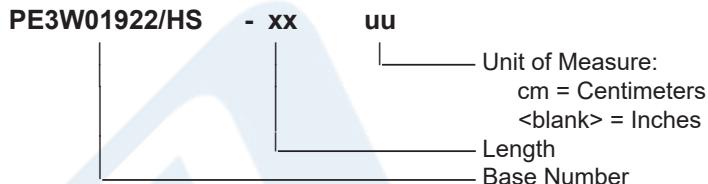

Example: PE3W01922/HS-12 = 12 inches long cable  
PE3W01922/HS-100cm = 100 cm long cable

N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-100 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W01922/HS](#)


URL: <https://www.pasternack.com/n-male-right-angle-to-tnc-male-low-loss-cable-using-lmr-100-with-heatshrink-pe3w01922-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W01922/HS CAD Drawing

N Male Right Angle to TNC Male Right Angle Low Loss Cable Using LMR-100 Coax with HeatShrink

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
A		INITIAL RELEASE	09/27/2023	HBAKKE	AGANWANI

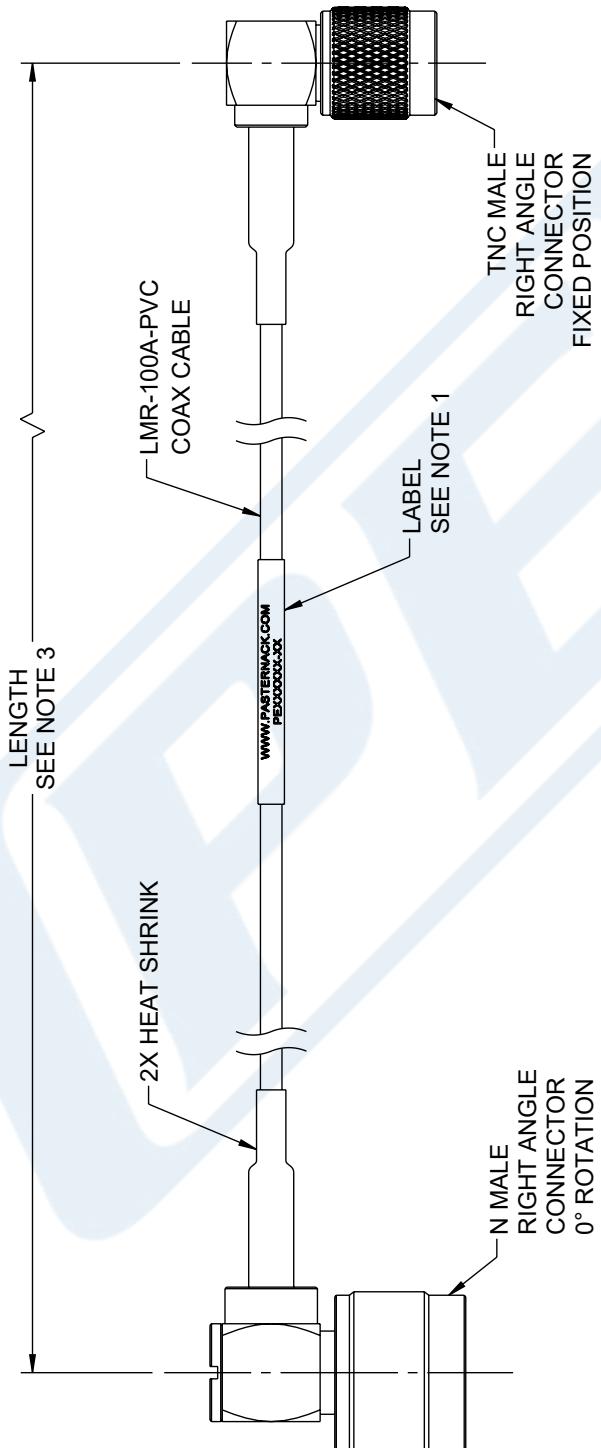

**NOTES:**

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:  
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED  
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6  
INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND  
DESCRIPTION.

 <b>PASTERNACK</b> an INFINITI® brand		  INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
<b>UNLESS OTHERWISE SPECIFIED,          LEADING DIMENSIONS ARE IN INCHES          DIMENSIONS IN [ ] ARE MILLIMETERS</b>		<b>TOLERANCES:</b> <b>FRACTIONS</b> $X = \pm .02 [0.5]$ $\pm 1/32$ $XXX = \pm .005 [0.13]$ <b>ANGLES</b> $\pm 1^\circ$ <b>CABLE LENGTH TOLERANCES:</b>	<b>SCALE</b> <b>SHEET</b> NONE      1 OF 1
<b>DESCRIPTION</b> <b>NAME</b> <b>MAIL ANGLE TO TNC</b> <b>MAIL PITCH ANGLE</b> <b>MAIL LOSS</b>		<b>WEBSITE:</b> <a href="http://www.Pasternack.com">www.Pasternack.com</a> <b>PHONE:</b> 1.866.727.8376   1.949.261.1920	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.  
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE ECD, AMENDMENT 7, OF THE ECD, AND ARE CONTROLLED UNDER ECD, AMENDMENT 7, OF THE ECD. NO EXPORT LICENSE IS REQUIRED.