



SMA Male to BNC Female Bulkhead Cable 100 cm Length Using RG188 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W02140/HS-100CM

Configuration

- Connector 1: SMA Male
- Connector 2: BNC Female Bulkhead
- Cable Type: RG188

Features

- Max Frequency 1 GHz
- PTFE Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W02140/HS-100CM SMA male to BNC female bulkhead 100 cm cable using RG188 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to BNC cable assembly has a male to female gender configuration with 50 ohm flexible RG188 coax. The PE3W02140/HS-100CM SMA male to BNC female cable assembly operates to 1 GHz. Our RF cable assembly with BNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.45:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	100	250	500	1,000		MHz
Insertion Loss (Typ.)	1.06	1.5	2.12	3		dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Female Bulkhead Cable 100 cm Length Using RG188 Coax with Heat-Shrink PE3W02140/HS-100CM](#)



SMA Male to BNC Female Bulkhead Cable 100 cm Length Using RG188 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W02140/HS-100CM

Mechanical Specifications

Cable Assembly

Length*

39.37 in [100 cm]

Cable

Cable Type

RG188

Impedance

50 Ohms

Inner Conductor Type

Stranded

Inner Conductor Material and Plating

Copper Clad Steel, Silver

Dielectric Type

PTFE

Number of Shields

1

Shield Layer 1

Silver Plated Copper Braid

Jacket Material

PTFE, White

Jacket Diameter

0.11 in [2.79 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	BNC Female Bulkhead
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification		30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification		100 μ in minimum
Coupling Nut Material and Plating	Brass, Gold	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Female Bulkhead Cable 100 cm Length Using RG188 Coax with Heat-Shrink PE3W02140/HS-100CM](#)




SMA Male to BNC Female Bulkhead Cable 100 cm
Length Using RG188 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W02140/HS-100CM

How to Order

Part Number Configuration:

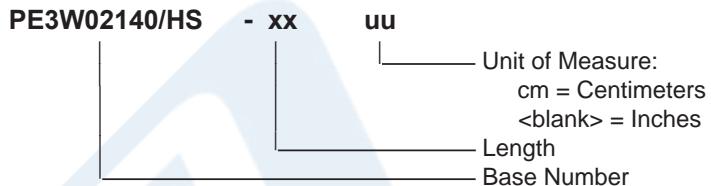

Example: PE3W02140/HS-12 = 12 inches long cable
PE3W02140/HS-100cm = 100 cm long cable

SMA Male to BNC Female Bulkhead Cable 100 cm Length Using RG188 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Female Bulkhead Cable 100 cm Length Using RG188 Coax with HeatShrink PE3W02140/HS-100CM](#)

URL: <https://www.pasternack.com/sma-male-bnc-female-rg188au-cable-assembly-pe3w02140-hs-100cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W02140/HS-100CM CAD Drawing

SMA Male to BNC Female Bulkhead Cable 100 cm

Length Using RG188 Coax with HeatShrink

