

## TNC Female to TNC Male Right Angle Low Loss Cable Using LMR-240-UF Coax with HeatShrink



### RF Cable Assemblies Technical Data Sheet


**PE3W02152/HS**

#### Configuration

- Connector 1: TNC Female
- Connector 2: TNC Male Right Angle
- Cable Type: LMR-240-UF

#### Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- TPE Jacket

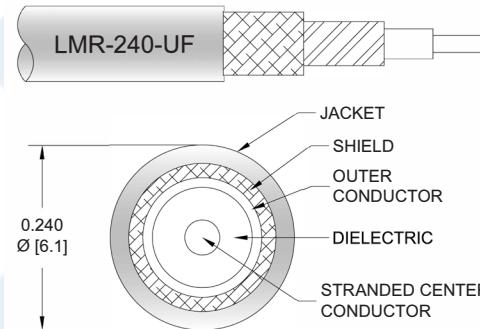

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W02152/HS TNC female to TNC male right angle cable using LMR-240-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a female to male gender configuration with 50 ohm flexible LMR-240-UF coax. The PE3W02152/HS TNC female to TNC male cable assembly operates to 5.8 GHz. The right angle TNC interface on the LMR-240-UF cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female to TNC Male Right Angle Low Loss Cable Using LMR-240-UF Coax with Heat-Shrink PE3W02152/HS](#)



## TNC Female to TNC Male Right Angle Low Loss Cable Using LMR-240-UF Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W02152/HS**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.5:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		4.28 [14.04]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ω/1000ft [Ω/Km]
Operating Voltage (AC)			335	Vrms
Jacket Spark			5,000	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.046	0.066	0.096	0.155	0.244	dB/ft
	0.15	0.22	0.31	0.51	0.8	dB/m

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as  $0.05 \times \text{SQRT}(f\text{GHz})$  dB for the right angle connector and 0.1 dB for the straight connector.

#### Mechanical Specifications

##### Cable Assembly

Weight 0.108 lbs [48.99 g]

##### Cable

Cable Type LMR-240-UF  
Impedance 50 Ohms  
Inner Conductor Type Stranded  
Inner Conductor Material and Plating Copper  
Dielectric Type PE (F)  
Number of Shields 2  
Shield Layer 1 Aluminum Tape  
Shield Layer 2 Tinned Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female to TNC Male Right Angle Low Loss Cable Using LMR-240-UF Coax with Heat-Shrink PE3W02152/HS](#)



## TNC Female to TNC Male Right Angle Low Loss Cable Using LMR-240-UF Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W02152/HS**

Jacket Material	TPE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.13 lbs-ft [0.18 N-m]
Flat Plate Crush	13 lbs/in [0.23 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	TNC Female	TNC Male Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Phosphor Bronze, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +85 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female to TNC Male Right Angle Low Loss Cable Using LMR-240-UF Coax with Heat-Shrink PE3W02152/HS](#)

TNC Female to TNC Male Right Angle Low Loss  
Cable Using LMR-240-UF Coax with HeatShrink



**RF Cable Assemblies Technical Data Sheet**

**PE3W02152/HS**

**How to Order**

Part Number Configuration:

**PE3W02152/HS - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W02152/HS-12 = 12 inches long cable  
PE3W02152/HS-100cm = 100 cm long cable

TNC Female to TNC Male Right Angle Low Loss Cable Using LMR-240-UF Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female to TNC Male Right Angle Low Loss Cable Using LMR-240-UF Coax with HeatShrink PE3W02152/HS](#)

URL: <https://www.pasternack.com/tnc-female-to-tnc-male-low-loss-cable-using-lmr-240-uf-with-heatshrink-pe3w02152-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3W02152/HS CAD Drawing**  
 TNC Female to TNC Male Right Angle Low Loss Cable  
 Using LMR-240-UF Coax with HeatShrink

