



## SMA Male to N Female Bulkhead Low Loss Cable Using LMR-400 Coax with HeatShrink, LF Solder

### TECHNICAL DATA SHEET


**PE3W02707LF/HS**

#### Configuration

- Connector 1: SMA Male
- Connector 2: N Female Bulkhead
- Cable Type: LMR-400
- Coax Flex Type: Flexible

#### Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- PE Jacket

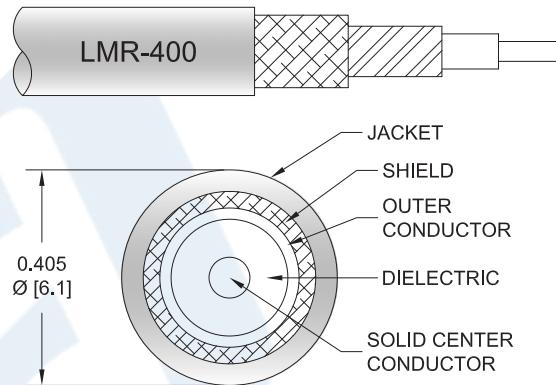

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W02707LF/HS SMA male to type N female bulkhead cable using LMR-400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to type N cable assembly has a male to female gender configuration with 50 ohm flexible LMR-400 coax. The PE3W02707LF/HS SMA male to type N female cable assembly operates to 5.8 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Bulkhead Low Loss Cable Using LMR-400 Coax with HeatShrink, LF Solder PE3W02707LF/HS](#)



## SMA Male to N Female Bulkhead Low Loss Cable Using LMR-400 Coax with HeatShrink, LF Solder

### TECHNICAL DATA SHEET

**PE3W02707LF/HS**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.39 [4.56]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ω/1000ft [Ω/Km]
Jacket Spark			8,000	Vrms

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	5800	MHz	
PE3W02707LF/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.02	0.03	0.04	0.07	0.11	dB/ft	
			0.07	0.1	0.14	0.23	0.36	dB/m	
PE3W02707LF/HS-12	12 inch	Insertion Loss (Typ.)	0.27	0.28	0.3	0.32	0.36	dB	0.227
PE3W02707LF/HS-24	24 inch	Insertion Loss (Typ.)	0.29	0.31	0.34	0.39	0.47	dB	0.295
PE3W02707LF/HS-36	36 inch	Insertion Loss (Typ.)	0.31	0.34	0.38	0.46	0.58	dB	0.362
PE3W02707LF/HS-48	48 inch	Insertion Loss (Typ.)	0.33	0.37	0.42	0.53	0.69	dB	0.429
PE3W02707LF/HS-60	60 inch	Insertion Loss (Typ.)	0.35	0.39	0.46	0.59	0.79	dB	0.496

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB

Loss due to Connector 2: 0.15 dB

Base Weight: 0.227 pounds

Additional Weight per Inch: 0.00559 pounds

#### Mechanical Specifications

##### Cable Assembly

Weight 0.227 lbs [102.97 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Bulkhead Low Loss Cable Using LMR-400 Coax with HeatShrink, LF Solder PE3W02707LF/HS](#)



## SMA Male to N Female Bulkhead Low Loss Cable Using LMR-400 Coax with HeatShrink, LF Solder

### TECHNICAL DATA SHEET

**PE3W02707LF/HS**

#### Cable

Cable Type	LMR-400
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.405 in [10.29 mm]

One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.5 lbs-ft [0.68 N-m]
Flat Plate Crush	40 lbs/in [0.71 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	SMA Male Threaded	N Female Bulkhead Threaded
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Mating Cycles		500
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification		30 $\mu$ m minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Gold	
Hex Size	5/16 inch	
Torque	5 in-lbs [0.57 Nm]	

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +85 deg C

#### Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Bulkhead Low Loss Cable Using LMR-400 Coax with HeatShrink, LF Solder PE3W02707LF/HS](#)



## SMA Male to N Female Bulkhead Low Loss Cable Using LMR-400 Coax with HeatShrink, LF Solder

### TECHNICAL DATA SHEET

**PE3W02707LF/HS**

#### How to Order

Part Number Configuration:

**PE3W02707LF/HS - xx****uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W02707LF/HS-12 = 12 inches long cable  
PE3W02707LF/HS-100cm = 100 cm long cable

SMA Male to N Female Bulkhead Low Loss Cable Using LMR-400 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to N Female Bulkhead Low Loss Cable Using LMR-400 Coax with HeatShrink, LF Solder PE3W02707LF/HS](#)

URL: <https://www.pasternack.com/sma-male-to-n-female-bulkhead-low-loss-cable-using-lmr-400-with-heatshrink-lf-solder-pe3w02707lf-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

