



**N Male Right Angle to N Male Right Angle Low Loss
Cable Using LMR-400-UF Coax with Times Microwave
Components with HeatShrink**

TECHNICAL DATA SHEET


PE3W03733/HS

Configuration

- Connector 1: N Male Right Angle
- Connector 2: N Male Right Angle
- Cable Type: LMR-400-UF
- Coax Flex Type: Flexible

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- TPE Jacket
- 500 Mating Cycles

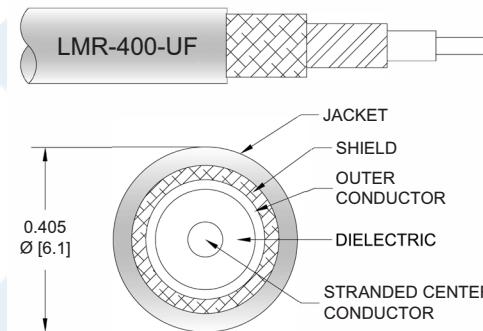

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W03733/HS type N male right angle to type N male right angle cable using LMR-400-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400-UF coax. The PE3W03733/HS type N male to type N male cable assembly operates to 6 GHz. The right angle type N interfaces on the LMR-400-UF cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components with HeatShrink PE3W03733/HS](#)



N Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components with HeatShrink

TECHNICAL DATA SHEET

PE3W03733/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.07 [3.51]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ω/1000ft [Ω/Km]
Jacket Spark			8,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3W03733/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.02	0.03	0.05	0.08	0.13	dB/ft	
			0.08	0.12	0.17	0.27	0.43	dB/m	
PE3W03733/HS-12	12 inch	Insertion Loss (Typ.)	0.43	0.44	0.45	0.49	0.53	dB	0.359
PE3W03733/HS-36	36 inch	Insertion Loss (Typ.)	0.47	0.51	0.55	0.65	0.79	dB	0.533
PE3W03733/HS-60	60 inch	Insertion Loss (Typ.)	0.52	0.57	0.65	0.81	1.05	dB	0.707
PE3W03733/HS-120	120 inch	Insertion Loss (Typ.)	0.63	0.74	0.89	1.21	1.7	dB	1.142
PE3W03733/HS-300	300 inch	Insertion Loss (Typ.)	0.98	1.25	1.63	2.43	3.65	dB	2.447

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.2 dB
Loss due to Connector 2: 0.2 dB
Base Weight: 0.359 pounds
Additional Weight per Inch: 0.00275 pounds

Mechanical Specifications

Cable Assembly

Weight 0.272 lbs [123.38 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components with HeatShrink PE3W03733/HS](#)



N Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components with HeatShrink

TECHNICAL DATA SHEET

PE3W03733/HS

Cable

Cable Type	LMR-400-UF
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	TPE, Black
Jacket Diameter	0.405 in [10.29 mm]

One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.38 lbs-ft [0.52 N-m]
Flat Plate Crush	20 lbs/in [0.36 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle Threaded	N Male Right Angle Threaded
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Hex Size	13/16 inch	13/16 inch
Torque	30 in-lbs [3.39 Nm]	30 in-lbs [3.39 Nm]

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components with HeatShrink PE3W03733/HS](#)




N Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components with HeatShrink

TECHNICAL DATA SHEET

PE3W03733/HS

How to Order

Part Number Configuration:

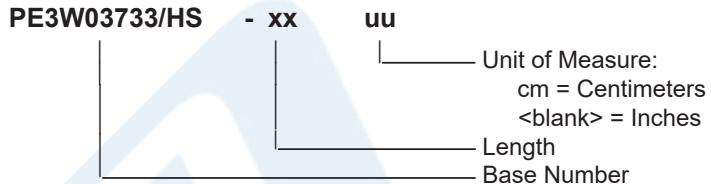

Example: PE3W03733/HS-12 = 12 inches long cable
PE3W03733/HS-100cm = 100 cm long cable

N Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components with HeatShrink PE3W03733/HS](#)


URL: <https://www.pasternack.com/n-male-right-angle-to-n-male-low-loss-cable-using-lmr-400-uf-with-heatshrink-pe3w03733-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W03733/HS CAP Drawing

N Male Right Angle to N Male Right Angle Low Loss Cable Using LMR-400-UF Coax with Times Microwave Components with HeatShrink

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	11/10/2023	KGLEBOVA	AGANWANI

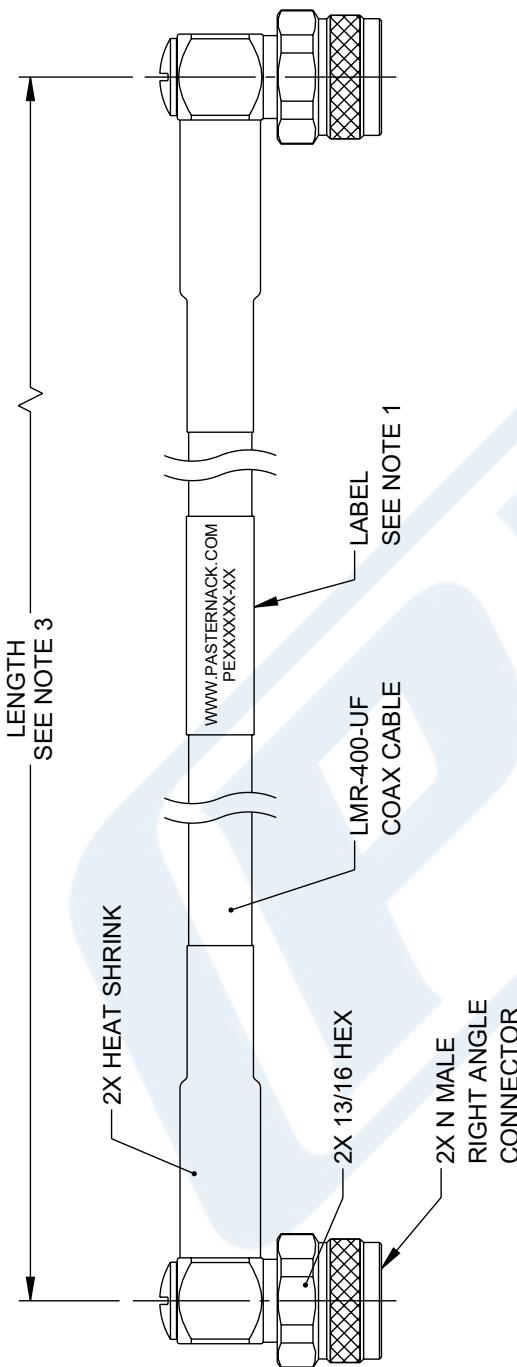

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6
INCHES FROM EACH CONNECTOR.

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6

- 2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
- 3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

INCHES FROM EACH CONNECTOR.

PASTERNACK an INFINITI® brand		 	
UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES: $XX = \pm 0.02 [0.5]$		FRACTIONS $XX = \pm 0.02 [0.13]$	
$X = 2.2 [55]$		ANGLES $\pm 1^\circ$ $1/32$	
CABLE LENGTH TOLERANCES: $\pm 12 [305]$ $\pm 60 [1524]$ $\pm 120 [3048]$		DESCRIPTION N MALE RIGHT ANGLE TO N MALE RIGHT ANGLE LOW LOSS CABLE USING LMR-400-UF COAX WITH TIMES MICROWAVE COMPONENTS WITH HEATSHRINK	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY		DRAWN BY KGLEBOVA	
SIZE A		ITEM NO. PE3W03733/HS	
CAGE CODE 53919		REV A	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.