



SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink

TECHNICAL DATA SHEET


PE3W04044/HS

Configuration

- Connector 1: SMA Male
- Connector 2: MMCX Plug
- Cable Type: LMR-100A
- Coax Flex Type: Flexible

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

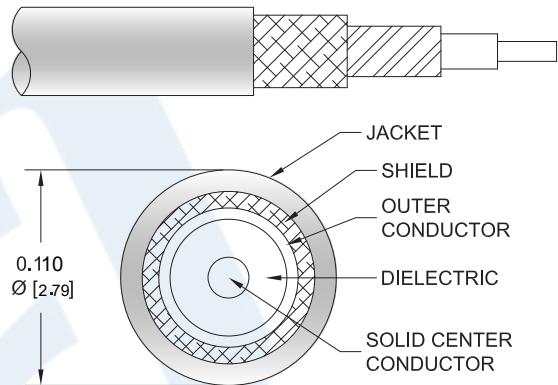

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W04044/HS SMA male to MMCX plug cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to MMCX cable assembly has a male to plug gender configuration with 50 ohm flexible LMR-100A coax. The PE3W04044/HS SMA male to MMCX plug cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W04044/HS](#)



SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink

TECHNICAL DATA SHEET

PE3W04044/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor		81 [265.75]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		9.5 [31.17]		Ω/1000ft [Ω/Km]
Jacket Spark			2,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency	250	500	1000	2500	5800	MHz
PE3W04044/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.12	0.17	0.24	0.4	0.64	dB/ft	
			0.38	0.55	0.79	1.31	2.11	dB/m	
PE3W04044/HS-24	24 inch	Insertion Loss (Typ.)	0.43	0.53	0.68	1	1.49	dB	0.036
PE3W04044/HS-36	36 inch	Insertion Loss (Typ.)	0.55	0.7	0.92	1.4	2.13	dB	0.045
PE3W04044/HS-48	48 inch	Insertion Loss (Typ.)	0.66	0.86	1.16	1.8	2.77	dB	0.054
PE3W04044/HS-100CM	100 cm	Insertion Loss (Typ.)	0.58	0.75	0.99	1.51	2.31	dB	0.048
PE3W04044/HS-200CM	200 cm	Insertion Loss (Typ.)	0.96	1.29	1.78	2.82	4.41	dB	0.078

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB

Loss due to Connector 2: 0.1 dB

Base Weight: 0.027 pounds

Additional Weight per Inch: 0.00075 pounds

Mechanical Specifications

Cable Assembly

Weight 0.027 lbs [12.25 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W04044/HS](#)



SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink

TECHNICAL DATA SHEET

PE3W04044/HS

Cable

Cable Type	LMR-100A
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]

One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Threaded	MMCX Plug Push-On
Specification		BS EN 122340
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification		3 μ in minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Gold
Outer Conductor Plating Specification		3 μ in minimum
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification		3 μ in minimum
Coupling Nut Material and Plating	Brass, Gold	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W04044/HS](#)




SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink

TECHNICAL DATA SHEET

PE3W04044/HS

How to Order

Part Number Configuration:

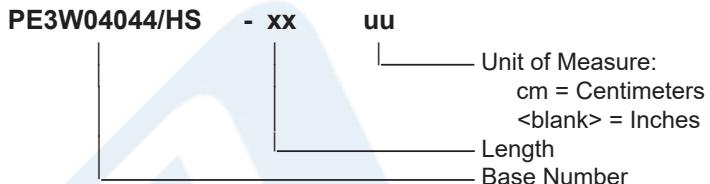

Example: PE3W04044/HS-12 = 12 inches long cable
PE3W04044/HS-100cm = 100 cm long cable

SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink PE3W04044/HS](#)


URL: <https://www.pasternack.com/sma-male-to-mmcx-plug-low-loss-cable-using-lmr-100-with-heatshrink-pe3w04044-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W04044/HS CAD Drawing

SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink

F

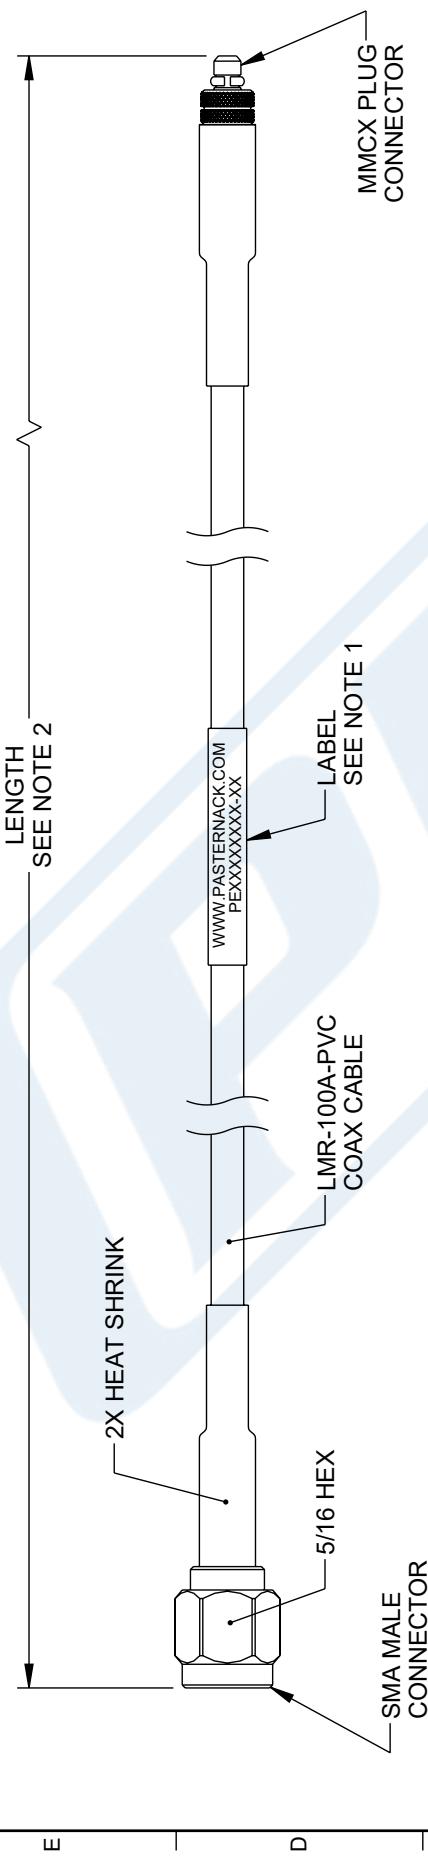

F

E

E

D

D

C

C

B

A

ZONE	REV	DESCRIPTION	REVISION	DATE	CHANGED BY	APPROVED
A	A	INITIAL RELEASE	1	10/2/2023	KDANG	AGANWANI

NOTES:

1. CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROX 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.
3. CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PASTERNACK® an INFINITE® brand Website: www.Pasterнак.com Phone: 1.866.727.8376 1.949.261.1920 DESCRIPTION	 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE SHEET	SMA Male to MMCX Plug Low Loss Cable Using LMR-100 Coax with HeatShrink		
		UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	TOLERANCES: X = ± 2.5 [0.5] XX = $\pm .02$ [0.5] XXX = $\pm .005$ [0.13] CABLE LENGTH TOLERANCES: S12.3035 [] = ± 1 [25] / -0 S12.3045 [] = ± 1 [25] / -0 S12.3048 [] = ± 1 [25] / -0 >12.3048 [] = ± 1 [25] / -0 >12.3048 [] = ± 1 [25] / -0 >60.1524 [] = ± 1 [25] / -0 >60.1524 [] = ± 1 [25] / -0 >120 [] = ± 1 [25] / -0 >120 [] = ± 1 [25] / -0 >300 [] = ± 1 [25] / -0 >300 [] = ± 1 [25] / -0	REV A