

## Rear Mount TNC Female Bulkhead to MMCX Plug Right Angle Cable Using RG174 Coax





### PE3W04284

#### Configuration

- Connector 1: TNC Female Bulkhead
- Connector 2: MMCX Plug Right Angle
- Cable Type: RG174
- Coax Flex Type: Flexible

#### Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

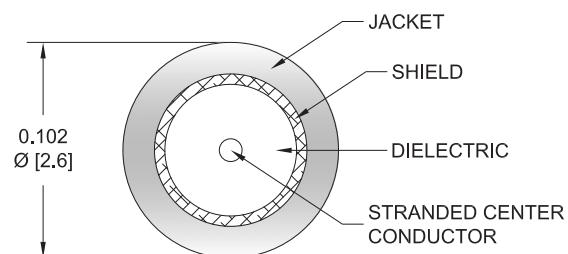

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W04284 TNC female bulkhead to MMCX plug right angle cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to MMCX cable assembly has a female to plug gender configuration with 50 ohm flexible RG174 coax. The PE3W04284 TNC female to MMCX plug cable assembly operates to 1 GHz. The right angle MMCX interface on the RG174 cable allows for easier connections in tight spaces. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation	66			%
Capacitance	31.1 [102.03]			pF/ft [pF/m]

#### Specifications by Frequency

## Rear Mount TNC Female Bulkhead to MMCX Plug Right Angle Cable Using RG174 Coax



### PE3W04284

Part Number	Length	Description	F1	F2	F3	F4	Units	Weight (lbs)
		Frequency	100	250	500	1000	MHz	
PE3W04284	Custom Lengths Available	Insertion Loss (Typ.)	0.08	0.14	0.21	0.32	dB/ft	
			0.28	0.45	0.7	1.05	dB/m	
PE3W04284-12	12 inch	Insertion Loss (Typ.)	0.39	0.44	0.52	0.62	dB	0.055
PE3W04284-24	24 inch	Insertion Loss (Typ.)	0.47	0.58	0.73	0.94	dB	0.064
PE3W04284-36	36 inch	Insertion Loss (Typ.)	0.56	0.72	0.94	1.26	dB	0.073
PE3W04284-48	48 inch	Insertion Loss (Typ.)	0.64	0.85	1.15	1.58	dB	0.082
PE3W04284-72	72 inch	Insertion Loss (Typ.)	0.81	1.13	1.57	2.22	dB	0.1

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB  
 Loss due to Connector 2: 0.2 dB  
 Base Weight: 0.055 pounds  
 Additional Weight per Inch: 0.00075 pounds

## Mechanical Specifications

### Cable Assembly

Weight 0.055 lbs [24.95 g]

### Cable

Cable Type RG174  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper Clad Steel, Silver  
 Dielectric Type PE  
 Number of Shields 1  
 Shield Layer 1 Tinned Copper Braid  
 Jacket Material PVC, Black  
 Jacket Diameter 0.11 in [2.79 mm]

## Connectors

Description	Connector 1	Connector 2
Type	TNC Female Bulkhead	MMCX Plug Right Angle
Specification	MIL-STD-348	BS EN 122340
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 $\mu$ in minimum	30 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Gold
Body Plating Specification		3 $\mu$ in minimum

## Rear Mount TNC Female Bulkhead to MMCX Plug Right Angle Cable Using RG174 Coax



### PE3W04284

#### Environmental Specifications

Operating Range Temperature

-40 to +80 deg C

#### Compliance Certifications (see [product page](#) for current document)


#### Plotted and Other Data

Notes:

#### Typical Performance Data

#### How to Order

Part Number Configuration:

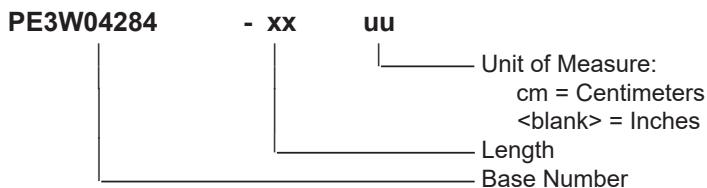

Example: PE3W04284-12 = 12 inches long cable  
PE3W04284-100cm = 100 cm long cable

Rear Mount TNC Female Bulkhead to MMCX Plug Right Angle Cable Using RG174 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Rear Mount TNC Female Bulkhead to MMCX Plug Right Angle Cable Using RG174 Coax PE3W04284](#)

URL: <https://www.pasternack.com/rear-mount-tnc-female-bulkhead-to-mmcx-plug-cable-using-rg174-pe3w04284-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W04284 CAD Drawing

Rear Mount TNC Female Bulkhead to MMCX Plug Right Angle Cable Using RG174 Coax

