



N Male to N Male Low Loss Cable Using LMR-600 Coax

TECHNICAL DATA SHEET


PE3W04474

Configuration

- Connector 1: N Male
- Connector 2: N Male
- Cable Type: LMR-600
- Coax Flex Type: Flexible

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 90 dB
- 87% Phase Velocity
- Double Shielded
- PE Jacket

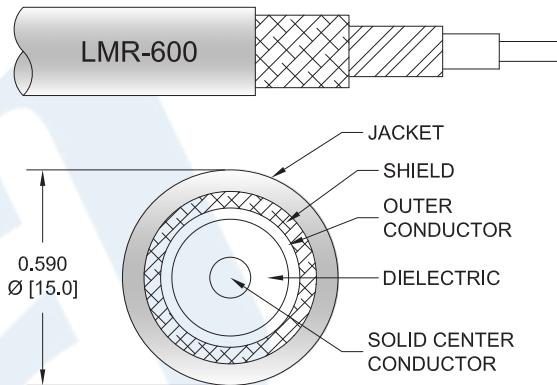

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W04474 type N male to type N male cable using LMR-600 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-600 coax. The PE3W04474 type N male to type N male cable assembly operates to 6 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-600 Coax PE3W04474](#)



N Male to N Male Low Loss Cable Using LMR-600 Coax

TECHNICAL DATA SHEET

PE3W04474

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		87		%
RF Shielding	90			dB
Group Delay		1.17 [3.84]		ns/ft [ns/m]
Capacitance		23.4 [76.77]		pF/ft [pF/m]
Inductance		0.058 [0.19]		uH/ft [uH/m]
DC Resistance Inner Conductor		0.53 [1.74]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		1.2 [3.94]		Ω/1000ft [Ω/Km]
Jacket Spark			8,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	6000	MHz	
PE3W04474	Custom Lengths Available	Insertion Loss (Typ.)	0.01	0.02	0.03	0.04	0.07	dB/ft	
			0.04	0.06	0.09	0.15	0.24	dB/m	
PE3W04474-24	24 inch	Insertion Loss (Typ.)	0.23	0.24	0.26	0.29	0.35	dB	0.559
PE3W04474-36	36 inch	Insertion Loss (Typ.)	0.24	0.26	0.28	0.34	0.42	dB	0.696
PE3W04474-48	48 inch	Insertion Loss (Typ.)	0.25	0.27	0.31	0.38	0.5	dB	0.833
PE3W04474-120	120 inch	Insertion Loss (Typ.)	0.32	0.37	0.46	0.64	0.93	dB	1.655
PE3W04474-180	180 inch	Insertion Loss (Typ.)	0.38	0.46	0.59	0.86	1.3	dB	2.34

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
Loss due to Connector 2: 0.1 dB
Base Weight: 0.421 pounds
Additional Weight per Inch: 0.01142 pounds

Mechanical Specifications

Cable Assembly

Weight 0.421 lbs [190.96 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-600 Coax PE3W04474](#)



N Male to N Male Low Loss Cable Using LMR-600 Coax

TECHNICAL DATA SHEET

PE3W04474

Cable

Cable Type	LMR-600
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.59 in [14.99 mm]

One Time Minimum Bend Radius	1.5 in [38.1 mm]
Repeated Minimum Bend Radius	6 in [152.4 mm]
Bending Moment	2.75 lbs-ft [3.73 N-m]
Flat Plate Crush	60 lbs/in [1.07 Kg/mm]
Tensile Strength	350 lbs [158.76 Kg]

Connectors

Description	Connector 1	Connector 2
Type	N Male Threaded	N Male Threaded
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	50 μ in. minimum	
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	100 μ in. minimum	
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	100 μ in. minimum	
Hex Size	20.57 mm	
Torque	44 in-lbs [4.97 Nm]	

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-600 Coax PE3W04474](#)



N Male to N Male Low Loss Cable Using LMR-600 Coax

TECHNICAL DATA SHEET

PE3W04474

How to Order

Part Number Configuration:

PE3W04474- **xx****uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W04474-12 = 12 inches long cable
PE3W04474-100cm = 100 cm long cable

N Male to N Male Low Loss Cable Using LMR-600 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Low Loss Cable Using LMR-600 Coax PE3W04474](#)

URL: <https://www.pasternack.com/n-male-to-n-male-low-loss-cable-using-lmr-600-pe3w04474-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W04474 CAD Drawing

N Male to N Male Low Loss Cable Using LMR-600 Coax

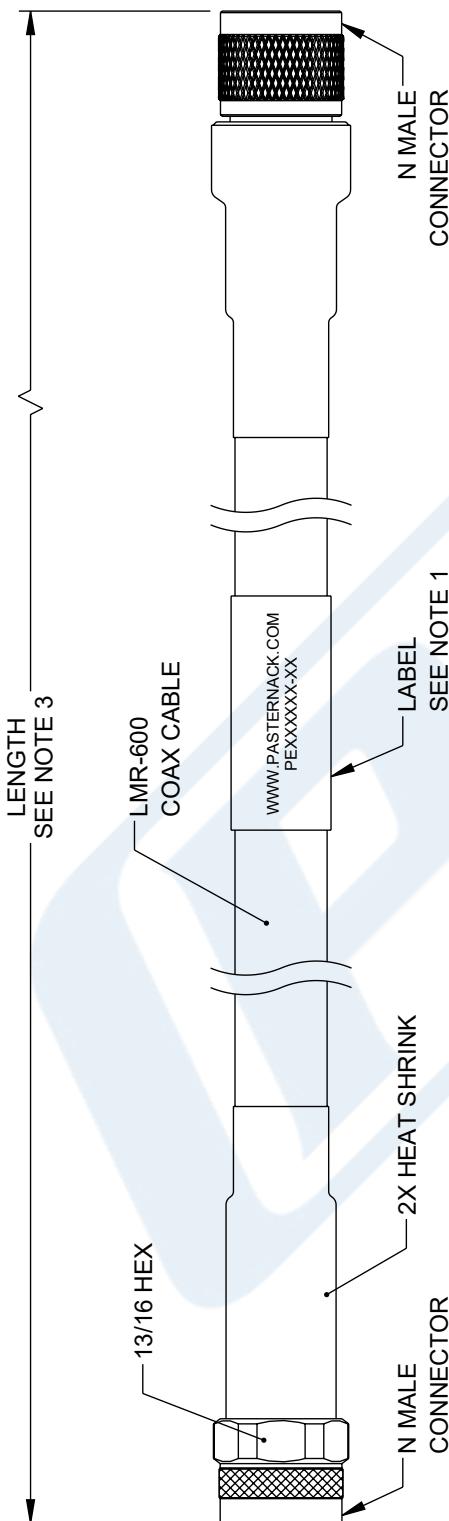

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	11/10/2023	KGLEBOVA	AGANWANI

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6
INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND
DESCRIPTION.

 PASTERNACK an INFINITE brand	INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE NONE	 1 OF 1

**UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE IN INCHES
DIMENSIONS [] ARE MILLIMETERS**

TOLERANCES:

$X = \pm 0.2 [0.5]$ $\pm 1/32$ **FRACTIONS**
 $XX = \pm 0.02 [0.13]$ $\pm 1/32$ **ANGLES** $\pm 1^\circ$

CABLE LENGTH TOLERANCES:

$>12.30[305] \leq 60.15[24] = +1 [25] / -0$
 $>60.15[24] \leq 120.30[48] = +2 [51] / -0$
 $>120.30[48] \leq 300 [7620] = +3 [75] / -0$
 $>300 [7620] \leq 480 [1220] = +5\% / -0$

DESCRIPTION

N MALE TO N MALE LOW LOSS CABLE USING LMR-600 COAX

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	KGLEBOVA	PE3W04474	A