

BNC Male Right Angle to SMA Female Cable 150 cm Length Using RG316 Coax



RF Cable Assemblies Technical Data Sheet



PE3W04854-150CM

Configuration

- Connector 1: BNC Male Right Angle
- Connector 2: SMA Female
- Cable Type: RG316

Features

- 69% Phase Velocity
- FEP Jacket

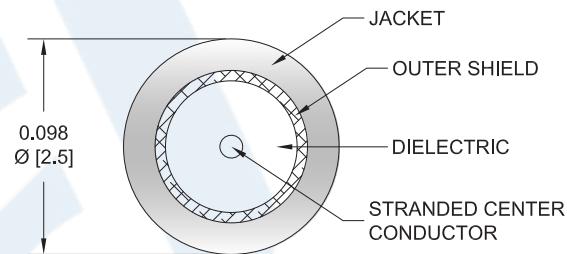

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W04854-150CM BNC male right angle to SMA female 150 cm cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to SMA cable assembly has a male to female gender configuration with 50 ohm flexible RG316 coax. The right angle BNC interface on the RG316 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
VSWR			1.5:1	
Velocity of Propagation	69			%
Jacket Spark		2,000		Vrms

Mechanical Specifications

Cable Assembly

Length*
Diameter

59.05 in [149.99 cm]
0.57 in [14.48 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to SMA Female Cable 150 cm Length Using RG316 Coax PE3W04854-150CM](#)



BNC Male Right Angle to SMA Female Cable 150 cm Length Using RG316 Coax

RF Cable Assemblies Technical Data Sheet

PE3W04854-150CM

Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.098 in [2.49 mm]

Connectors

Description	Connector 1	Connector 2
Type	BNC Male Right Angle	SMA Female
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Silver	Beryllium Copper, Gold
Contact Plating Specification		50 μ in. minimum
Dielectric Type		Teflon
Outer Conductor Material and Plating		Brass, Gold
Outer Conductor Plating Specification		3 μ in. minimum
Body Material and Plating	Brass, Nickel	Brass, Gold
Body Plating Specification		3 μ in. minimum

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8$ ", whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to SMA Female Cable 150 cm Length Using RG316 Coax PE3W04854-150CM](#)

BNC Male Right Angle to SMA Female Cable
150 cm Length Using RG316 Coax



RF Cable Assemblies Technical Data Sheet

PE3W04854-150CM

How to Order

Part Number Configuration:

PE3W04854

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W04854-12 = 12 inches long cable
PE3W04854-100cm = 100 cm long cable

BNC Male Right Angle to SMA Female Cable 150 cm Length Using RG316 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male Right Angle to SMA Female Cable 150 cm Length Using RG316 Coax PE3W04854-150CM](#)

URL: <https://www.pasternack.com/bnc-male-sma-female-rg316u-cable-assembly-pe3w04854-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W04854-150CM CAD Drawing

BNC Male Right Angle to SMA Female Cable 150 cm Length Using RG316 Coax

