

Push-On SMP Female Right Angle to SMA Male
Cable Using RG316 Coax with HeatShrink




RF Cable Assemblies Technical Data Sheet

PE3W05274/HS


Configuration

- Connector 1: Push-OnSMP Female Right Angle
- Connector 2: SMA Male
- Cable Type: RG316



Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

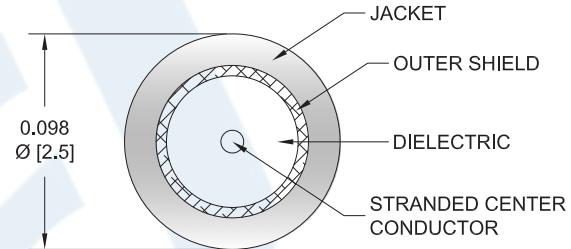

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W05274/HS SMP female push-on right angle to SMA male cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMP to SMA cable assembly has a female to male gender configuration with 50 ohm flexible RG316 coax. The PE3W05274/HS SMP female to SMA male cable assembly operates to 3 GHz. The right angle SMP interface on the RG316 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to SMA Male Cable Using RG316 Coax with HeatShrink PE3W05274/HS](#)



Push-On SMP Female Right Angle to SMA Male Cable Using RG316 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W05274/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.11	0.159	0.238	0.379	0.58	dB/ft
	0.36	0.52	0.78	1.24	1.9	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB for the right angle connector and 0.1 dB for the straight connector.

Mechanical Specifications

Cable Assembly

Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver PTFE
Dielectric Type	1
Number of Shields	Silver Plated Copper Braid
Shield Layer 1	FEP, Tan
Jacket Material	0.102 in [2.59 mm]
Jacket Diameter	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to SMA Male Cable Using RG316 Coax with HeatShrink PE3W05274/HS](#)

Push-On SMP Female Right Angle to SMA Male Cable Using RG316 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W05274/HS

Connectors

Description	Connector 1	Connector 2
Type	SMP Female Right Angle	SMA Male
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Connection Method	Push-On	
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	30 μ in. minimum	
Dielectric Type	Teflon	PTFE
Outer Conductor Material and Plating	Beryllium Copper, Gold	
Outer Conductor Plating Specification	3 μ in. minimum	
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification	3 μ in. minimum	
Coupling Nut Material and Plating		Brass, Gold
Hex Size		5/16 in
Torque		5 in-lbs [0.57 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to SMA Male Cable Using RG316 Coax with HeatShrink PE3W05274/HS](#)

Push-On SMP Female Right Angle to SMA Male Cable Using RG316 Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W05274/HS

How to Order

Part Number Configuration:

PE3W05274/HS - **xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W05274/HS-12 = 12 inches long cable
PE3W05274/HS-100cm = 100 cm long cable

Push-On SMP Female Right Angle to SMA Male Cable Using RG316 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to SMA Male Cable Using RG316 Coax with HeatShrink PE3W05274/HS](#)

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W05274/HS CAD Drawing
 Push-On SMP Female Right Angle to SMA Male Cable
 Using RG316 Coax with HeatShrink

