



## Snap-On QMA Male to Snap-On QMA Male Low Loss Cable Using LMR-200 Coax

### TECHNICAL DATA SHEET


PE3W05364

#### Configuration

- Connector 1: Snap-On QMA Male
- Connector 2: Snap-On QMA Male
- Cable Type: LMR-200
- Coax Flex Type: Flexible

#### Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 83% Phase Velocity
- Double Shielded
- PE Jacket
- 100 Mating Cycles

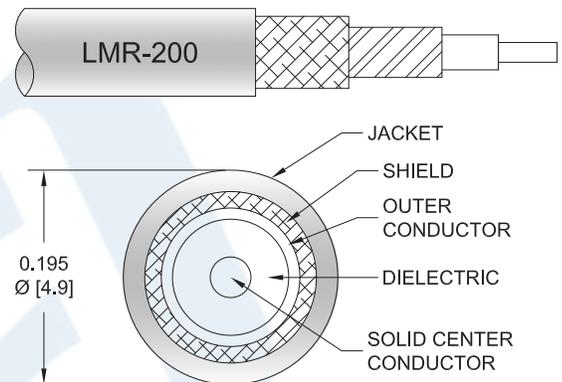

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W05364 QMA male snap-on to QMA male snap-on cable using LMR-200 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack QMA to QMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-200 coax. The PE3W05364 QMA male to QMA male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On QMA Male to Snap-On QMA Male Low Loss Cable Using LMR-200 Coax PE3W05364](#)



## Snap-On QMA Male to Snap-On QMA Male Low Loss Cable Using LMR-200 Coax

### TECHNICAL DATA SHEET

**PE3W05364**

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		83		%
RF Shielding	90			dB
Group Delay		1.22 [4]		ns/ft [ns/m]
Capacitance		24.5 [80.38]		pF/ft [pF/m]
Inductance		0.061 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		5.36 [17.59]		$\Omega$ /1000ft [ $\Omega$ /Km]
DC Resistance Outer Conductor		4.9 [16.08]		$\Omega$ /1000ft [ $\Omega$ /Km]
Jacket Spark			3,000	Vrms

#### Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	5800	MHz	
PE3W05364	Custom Lengths Available	Insertion Loss (Typ.)	0.05	0.07	0.1	0.16	0.26	dB/ft	
			0.17	0.23	0.33	0.53	0.86	dB/m	
PE3W05364-24	24 inch	Insertion Loss (Typ.)	0.3	0.34	0.4	0.52	0.72	dB	0.1
PE3W05364-36	36 inch	Insertion Loss (Typ.)	0.35	0.41	0.5	0.68	0.98	dB	0.13
PE3W05364-48	48 inch	Insertion Loss (Typ.)	0.4	0.48	0.6	0.84	1.24	dB	0.15
PE3W05364-60	60 inch	Insertion Loss (Typ.)	0.45	0.55	0.7	1	1.5	dB	0.17
PE3W05364-72	72 inch	Insertion Loss (Typ.)	0.5	0.62	0.8	1.16	1.76	dB	0.19

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.082 pounds
Additional Weight per Inch:	0.00184 pounds

#### Mechanical Specifications

##### Cable Assembly

Weight 0.054 lbs [24.49 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On QMA Male to Snap-On QMA Male Low Loss Cable Using LMR-200 Coax PE3W05364](#)



## Snap-On QMA Male to Snap-On QMA Male Low Loss Cable Using LMR-200 Coax

### TECHNICAL DATA SHEET

PE3W05364

#### Cable

Cable Type	LMR-200
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.195 in [4.95 mm]
One Time Minimum Bend Radius	0.5 in [12.7 mm]
Repeated Minimum Bend Radius	2 in [50.8 mm]
Bending Moment	0.2 lbs-ft [0.27 N-m]
Flat Plate Crush	15 lbs/in [0.27 Kg/mm]
Tensile Strength	40 lbs [18.14 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	QMA Male	QMA Male
Impedance	50 Ohms	50 Ohms
Connection Method	Snap-On	Snap-On
Mating Cycles	100	100
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	51µ in. minimum	51µ in. minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal

#### Environmental Specifications

##### Temperature

Operating Range -40 to +80 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On QMA Male to Snap-On QMA Male Low Loss Cable Using LMR-200 Coax PE3W05364](#)



## Snap-On QMA Male to Snap-On QMA Male Low Loss Cable Using LMR-200 Coax

### TECHNICAL DATA SHEET

PE3W05364

#### How to Order

Part Number Configuration:

PE3W05364

- xx

uu

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W05364-12 = 12 inches long cable  
PE3W05364-100cm = 100 cm long cable

Snap-On QMA Male to Snap-On QMA Male Low Loss Cable Using LMR-200 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Snap-On QMA Male to Snap-On QMA Male Low Loss Cable Using LMR-200 Coax PE3W05364](#)

URL: <https://www.pasternack.com/snap-on-qma-male-to-snap-on-qma-male-low-loss-cable-using-lmr-200-pe3w05364-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W05364 CAD Drawing


Snap-On QMA Male to Snap-On QMA Male Low Loss Cable Using LMR-200 Coax

F E D C B A

F E D C B A

1 2 3 4 5 6

REVISION		DATE	CHANGED BY	APPROVED
ZONE	REV	DESCRIPTION	INITIAL RELEASE	
	A		09/27/2023	DMAY
				AGANWANI

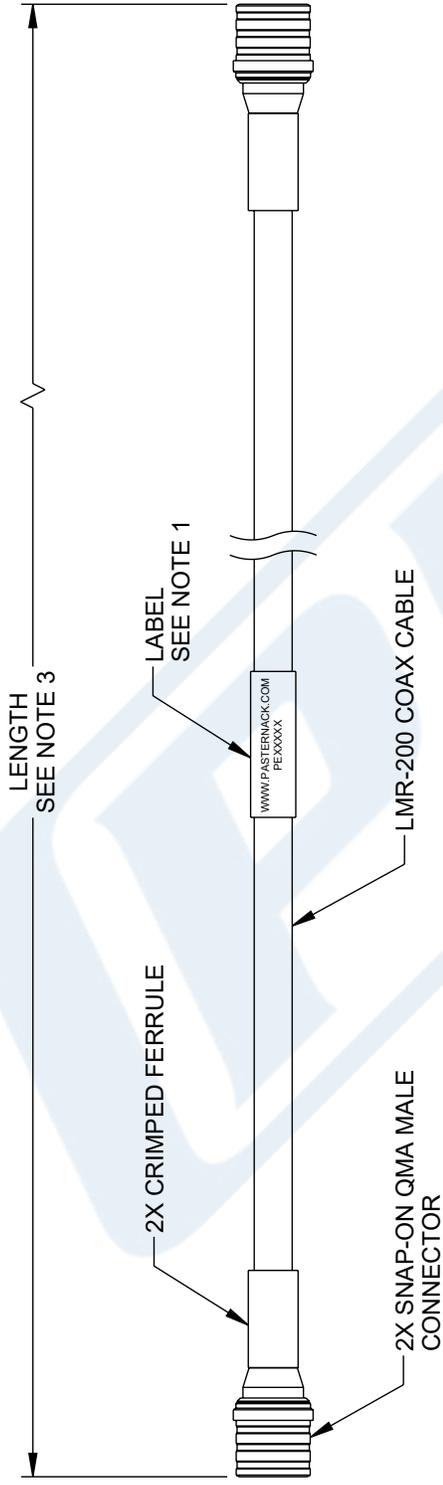

**NOTES:**

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED, LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

	INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE: NONE SHEET: 1 OF 1
	Website: www.Pasternack.com Phone: 1.866.727.8376   1.949.261.1920
DESCRIPTION: SNAP-ON QMA MALE TO SNAP-ON QMA MALE LOW LOSS CABLE USING LMR-200 COAX	
SIZE: A CAGE CODE: 53919 DRAWN BY: DMAY	ITEM NO.: PE3W05364 REV: A

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS	<b>TOLERANCES:</b> .X = ±.015 .XX = ±.02 (0.5) .XXX = ±.005 (0.13)	<b>FRACTIONS</b> ± 1/32 ANGLES ± 1°
<b>CABLE LENGTH TOLERANCES:</b> <12 [305] = ±.1 [2.5] / -0 >12 [305] ≤ 60 [1524] = ±.2 [5.1] / -0 >60 [1524] ≤ 120 [3048] = ±.4 [10.2] / -0 >120 [3048] ≤ 300 [7620] = ±.6 [15.2] / -0 >300 [7620] = ±.5% / -0		

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE NON-CRITICAL FEATURES. UNLESS OTHERWISE SPECIFIED, DIMENSIONS MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.