



N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax

TECHNICAL DATA SHEET


PE3W07005

Configuration

- Connector 1: N Male Right Angle
- Connector 2: TNC Male
- Cable Type: LMR-400
- Coax Flex Type: Flexible

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- PE Jacket

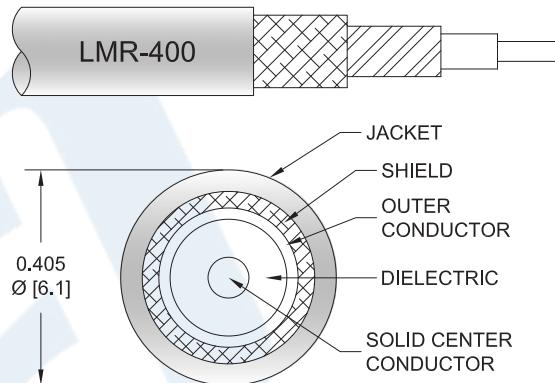

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07005 type N male right angle to TNC male cable using LMR-400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400 coax. The PE3W07005 type N male to TNC male cable assembly operates to 5.8 GHz. The right angle type N interface on the LMR-400 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax PE3W07005](#)



N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax

TECHNICAL DATA SHEET

PE3W07005

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		1.39 [4.56]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		1.65 [5.41]		Ω/1000ft [Ω/Km]
Jacket Spark			8,000	Vrms

Specifications by Frequency

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	250	500	1000	2500	5800	MHz	
PE3W07005	Custom Lengths Available	Insertion Loss (Typ.)	0.02	0.03	0.04	0.07	0.11	dB/ft	
			0.07	0.1	0.14	0.23	0.36	dB/m	
PE3W07005-12	12 inch	Insertion Loss (Typ.)	0.27	0.28	0.3	0.32	0.36	dB	0.243
PE3W07005-24	24 inch	Insertion Loss (Typ.)	0.29	0.31	0.34	0.39	0.47	dB	0.311
PE3W07005-36	36 inch	Insertion Loss (Typ.)	0.31	0.34	0.38	0.46	0.58	dB	0.378
PE3W07005-48	48 inch	Insertion Loss (Typ.)	0.33	0.37	0.42	0.53	0.69	dB	0.445
PE3W07005-60	60 inch	Insertion Loss (Typ.)	0.35	0.39	0.46	0.59	0.79	dB	0.512

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.15 dB

Loss due to Connector 2: 0.1 dB

Base Weight: 0.243 pounds

Additional Weight per Inch: 0.00559 pounds

Mechanical Specifications

Cable Assembly

Weight 0.243 lbs [110.22 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax PE3W07005](#)



N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax

TECHNICAL DATA SHEET

PE3W07005

Cable

Cable Type	LMR-400
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.405 in [10.29 mm]

One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.5 lbs-ft [0.68 N-m]
Flat Plate Crush	40 lbs/in [0.71 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle Threaded	TNC Male Threaded
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	
Contact Material and Plating	Brass, Gold	Brass, Silver
Contact Plating Specification	30 μ in minimum	ASTM-B700
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Tri-Metal	Brass, Nickel
Body Plating Specification		ASTM-B689
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Nickel
Coupling Nut Plating Specification		ASTM-B689

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax PE3W07005](#)



N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax

TECHNICAL DATA SHEET

PE3W07005

How to Order

Part Number Configuration:

PE3W07005- **xx****uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W07005-12 = 12 inches long cable
PE3W07005-100cm = 100 cm long cable

N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax PE3W07005](#)

URL: <https://www.pasternack.com/n-male-right-angle-to-tnc-male-low-loss-cable-using-lmr-400-pe3w07005-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W07005 CAD Drawing

N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax

山

© 2009 All Rights Reserved

PF3W07005 RFV 1.0

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	10/9/2023	KDANG	AGANVANI

1

The diagram illustrates a coaxial cable assembly. At the bottom, an **N MALE RIGHT ANGLE CONNECTOR** is shown. A section of **LMR-400 COAX CABLE** is attached to it, with a **18mm HEX** crimp ferrule. The cable is labeled **2X CRIMP FERRULE**. The assembly continues as a single piece of cable, with a **LABEL SEE NOTE 1** placed on it. Further up, the cable is terminated with a **TNC MALE CONNECTOR**. A dimension line on the left indicates the **LENGTH SEE NOTE 2**.

NOTES

1. CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROX 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.
3. CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMUNITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVISION CONTRARY TO U.S. LAW PROHIBITED.

 PASTERNAK® an INFINITE® brand		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SHEET	
UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS [] ARE MILLIMETERS		TOLERANCES: $X = \pm 0.2 [0.5]$ FRACTIONS $XXX = \pm 0.02 [0.01]$ ANGLES $\pm 1^\circ$ CABLE LENGTH TOLERANCES: $\geq 12 [305]$ $\leq 12 [305]$ $= 12 [305]$ $-0 [0]$ $\geq 60 [1524]$ $\leq 60 [1524]$ $= 60 [1524]$ $-0 [0]$ $\geq 120 [3048]$ $\leq 120 [3048]$ $= 120 [3048]$ $-0 [0]$ $\geq 120 [3048]$ $\leq 120 [3048]$ $= 120 [3048]$ $-0 [0]$ $\geq 300 [7620]$ $\leq 300 [7620]$ $= 300 [7620]$ $-0 [0]$	
$X = \pm 0.2 [0.5]$ $XXX = \pm 0.02 [0.01]$		WEBSITE: www.Pasternack.com PHONE: 1.866.727.8376 1.949.261.1920 DESCRIPTION N Male Right Angle to TNC Male Low Loss Cable Using LMR-400 Coax	
SIZE A	CAGE CODE 53919	DRAWN BY KDANG	ITEM NO. PE3W07005
REV A			

1

5