



N Female Bulkhead to BNC Male Low Loss Cable 60 Inch Length Using LMR-200 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet


PE3W07094-60

Configuration

- Connector 1: N Female Bulkhead
- Connector 2: BNC Male
- Cable Type: LMR-200

Features

- Max Frequency 3 GHz
- Shielding Effectivity > 90 dB
- 83% Phase Velocity
- Double Shielded
- PE Jacket

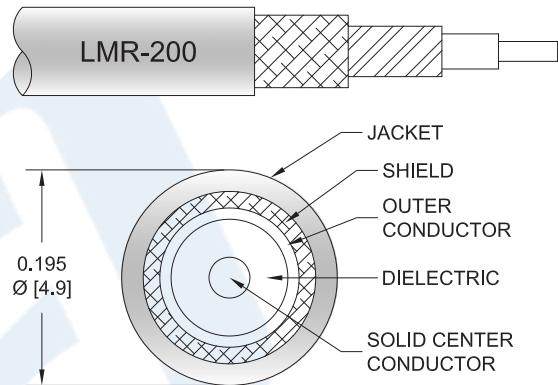

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07094-60 type N female bulkhead to BNC male 60 inch cable using LMR-200 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to BNC cable assembly has a female to male gender configuration with 50 ohm flexible LMR-200 coax. The PE3W07094-60 type N female to BNC male cable assembly operates to 3 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to BNC Male Low Loss Cable 60 Inch Length Using LMR-200 Coax with HeatShrink PE3W07094-60](#)



N Female Bulkhead to BNC Male Low Loss Cable 60 Inch Length Using LMR-200 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W07094-60

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range | DC | | 3 | GHz |
| VSWR | | | 1.5:1 | |
| Velocity of Propagation | | 83 | | % |
| RF Shielding | 90 | | | dB |
| Group Delay | | 1.22 [4] | | ns/ft [ns/m] |
| Capacitance | | 24.5 [80.38] | | pF/ft [pF/m] |
| Inductance | | 0.061 [0.2] | | uH/ft [uH/m] |
| DC Resistance Inner Conductor | | 5.36 [17.59] | | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor | | 4.9 [16.08] | | Ω/1000ft [Ω/Km] |
| Jacket Spark | | | 3,000 | Vrms |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency | 0.1 | 0.25 | 0.5 | 1 | 3 | GHz |
| Insertion Loss (Max.) | 0.36 | 0.46 | 0.57 | 0.72 | 1.12 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.1 dB per N female bulkhead and BNC male connector.

Mechanical Specifications

Cable Assembly

| | |
|----------|--------------------|
| Length* | 60 in [152.4 cm] |
| Diameter | 0.86 in [21.84 mm] |

Cable

| | |
|--------------------------------------|---------------------|
| Cable Type | LMR-200 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper |
| Dielectric Type | PE (F) |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |
| Jacket Material | PE, Black |
| Jacket Diameter | 0.195 in [4.95 mm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to BNC Male Low Loss Cable 60 Inch Length Using LMR-200 Coax with HeatShrink PE3W07094-60](#)



N Female Bulkhead to BNC Male Low Loss Cable 60 Inch Length Using LMR-200 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W07094-60

| | |
|------------------------------|------------------------|
| One Time Minimum Bend Radius | 0.5 in [12.7 mm] |
| Repeated Minimum Bend Radius | 2 in [50.8 mm] |
| Bending Moment | 0.2 lbs-ft [0.27 N-m] |
| Flat Plate Crush | 15 lbs/in [0.27 Kg/mm] |
| Tensile Strength | 40 lbs [18.14 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|---------------------------------------|-------------------|-------------------|
| Type | N Female Bulkhead | BNC Male |
| Specification | IEC 61169-16 | MIL-STD-348 |
| Impedance | 50 Ohms | 50 Ohms |
| Mating Cycles | 500 | |
| Contact Material and Plating | Copper, Silver | Brass, Gold |
| Contact Plating Specification | 5 μ m minimum | |
| Dielectric Type | PTFE | PTFE |
| Outer Conductor Material and Plating | Brass, Tri-Metal | Copper, Tri-Metal |
| Outer Conductor Plating Specification | 2 μ m minimum | |
| Body Material and Plating | | Brass, Tri-Metal |
| Coupling Nut Material and Plating | | Brass, Tri-Metal |
| Hex Size | 1/2 inch | |
| Seal Gasket Material | Silicone | Silicone |

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to BNC Male Low Loss Cable 60 Inch Length Using LMR-200 Coax with HeatShrink PE3W07094-60](#)



N Female Bulkhead to BNC Male Low Loss Cable 60 Inch Length Using LMR-200 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W07094-60

How to Order

Part Number Configuration:

PE3W07094

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W07094-12 = 12 inches long cable
PE3W07094-100cm = 100 cm long cable

N Female Bulkhead to BNC Male Low Loss Cable 60 Inch Length Using LMR-200 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead to BNC Male Low Loss Cable 60 Inch Length Using LMR-200 Coax with HeatShrink PE3W07094-60](#)

URL: <https://www.pasternack.com/n-female-bnc-male-lmr200-cable-assembly-pe3w07094-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W07094-60 CAD Drawing
N Female Bulkhead to BNC Male Low Loss Cable 60 Inch
Length Using LMR-200 Coax with HeatShrink

| REVISIONS | | | | | |
|-----------|-----------------|-----------|----------|--|--|
| REV. | DESCRIPTION | DATE | APPROVED | | |
| A | INITIAL RELEASE | 1/21/2020 | S.ELLIS | | |

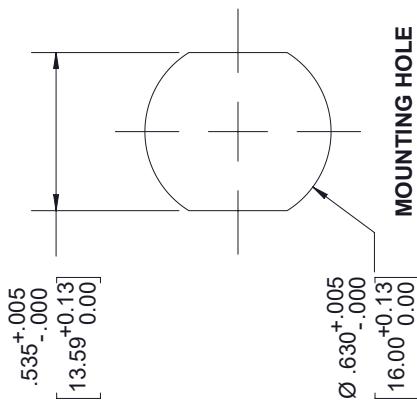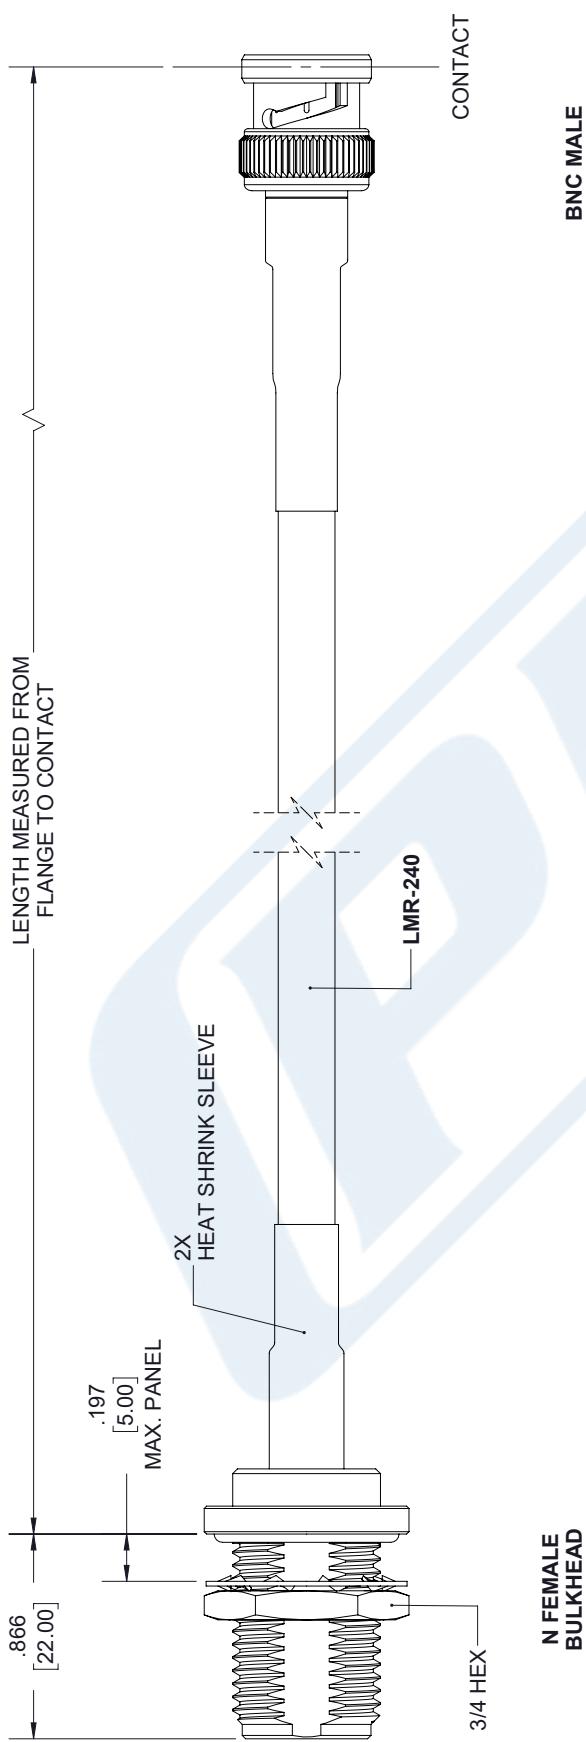

| | | | |
|---------------------------------------|-----------|---|--------------|
| PASTERNAK an INFINITE brand | | THIRD-ANGLE PROJECTION | |
| | | THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED. | |
| P | PE | Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com | SHEET 1 OF 1 |
| SCALE | N/A | ITEM NO. PE3W07094 | REV. A |
| SIZE | CAGE CODE | DRAWN BY | |
| A | 53919 | K. DANG | |

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS
TOLERANCES:

| | | | |
|------------------------------|-----------------|-----------------------------|-----------------|
| X = ± .2 | [.508] | FRACTIONS | |
| XX = ± .02 | [.51] | ± 1/32 | |
| XXX = ± .005 | [.13] | ANGLES ± 1° | |
| CABLE LENGTH (L) TOLERANCES: | | | |
| L ≤ 12 | [305] | L = +1 [25] / -0 | |
| 12 [305] < L ≤ 60 [1524] | = +2 [51] / -0 | 60 [1524] < L ≤ 120 [3048] | = +4 [102] / -0 |
| 120 [3048] < L ≤ 300 [7620] | = +6 [153] / -0 | 300 [7620] < L = +5% L / -0 | |

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.