

TNC Male Right Angle to BNC Male Low Loss Cable Using LMR-240-UF Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet


PE3W07205/HS

Configuration

- Connector 1: TNC Male Right Angle
- Connector 2: BNC Male
- Cable Type: LMR-240-UF

Features

- Max Frequency 4 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- TPE Jacket

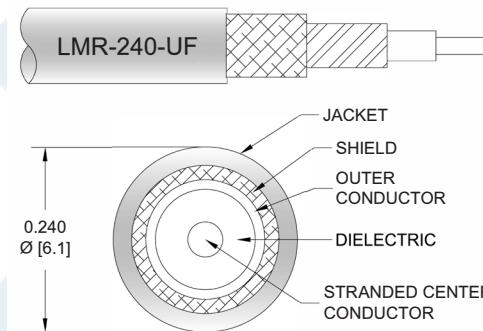

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07205/HS TNC male right angle to BNC male cable using LMR-240-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-UF coax. The PE3W07205/HS TNC male to BNC male cable assembly operates to 4 GHz. The right angle TNC interface on the LMR-240-UF cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to BNC Male Low Loss Cable Using LMR-240-UF Coax with HeatShrink PE3W07205/HS](#)

TNC Male Right Angle to BNC Male Low Loss Cable Using LMR-240-UF Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W07205/HS

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		4.28 [14.04]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ω/1000ft [Ω/Km]
Jacket Spark			5,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Typ.)	0.028	0.046	0.066	0.095	0.195	dB/ft
	0.09	0.15	0.22	0.31	0.64	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Weight 0.114 lbs [51.71 g]

Cable

Cable Type LMR-240-UF
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper
Dielectric Type PE (F)
Number of Shields 2
Shield Layer 1 Aluminum Tape
Shield Layer 2 Tinned Copper Braid
Jacket Material TPE, Black
Jacket Diameter 0.24 in [6.1 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to BNC Male Low Loss Cable Using LMR-240-UF Coax with Heat-Shrink PE3W07205/HS](#)

TNC Male Right Angle to BNC Male Low Loss Cable Using LMR-240-UF Coax with HeatShrink



RF Cable Assemblies Technical Data Sheet

PE3W07205/HS

One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.13 lbs-ft [0.18 N-m]
Flat Plate Crush	13 lbs/in [0.23 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male Right Angle	BNC Male
Specification		MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to BNC Male Low Loss Cable Using LMR-240-UF Coax with Heat-Shrink PE3W07205/HS](#)

TNC Male Right Angle to BNC Male Low Loss Cable
Using LMR-240-UF Coax with HeatShrink




RF Cable Assemblies Technical Data Sheet

PE3W07205/HS

How to Order

Part Number Configuration:

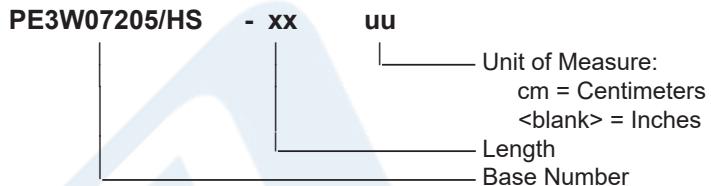

Example: PE3W07205/HS-12 = 12 inches long cable
PE3W07205/HS-100cm = 100 cm long cable

TNC Male Right Angle to BNC Male Low Loss Cable Using LMR-240-UF Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to BNC Male Low Loss Cable Using LMR-240-UF Coax with HeatShrink PE3W07205/HS](#)


URL: <https://www.pasternack.com/tnc-male-right-angle-to-bnc-male-low-loss-cable-using-lmr-240-uf-with-heatshrink-pe3w07205-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W07205/HS CAD Drawing

TNC Male Right Angle to BNC Male Low Loss Cable Using LMR-240-UF Coax with HeatShrink

ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED BY
	A	INITIAL RELEASE	01/25/2023	BPUCHASKI	AGANWANI

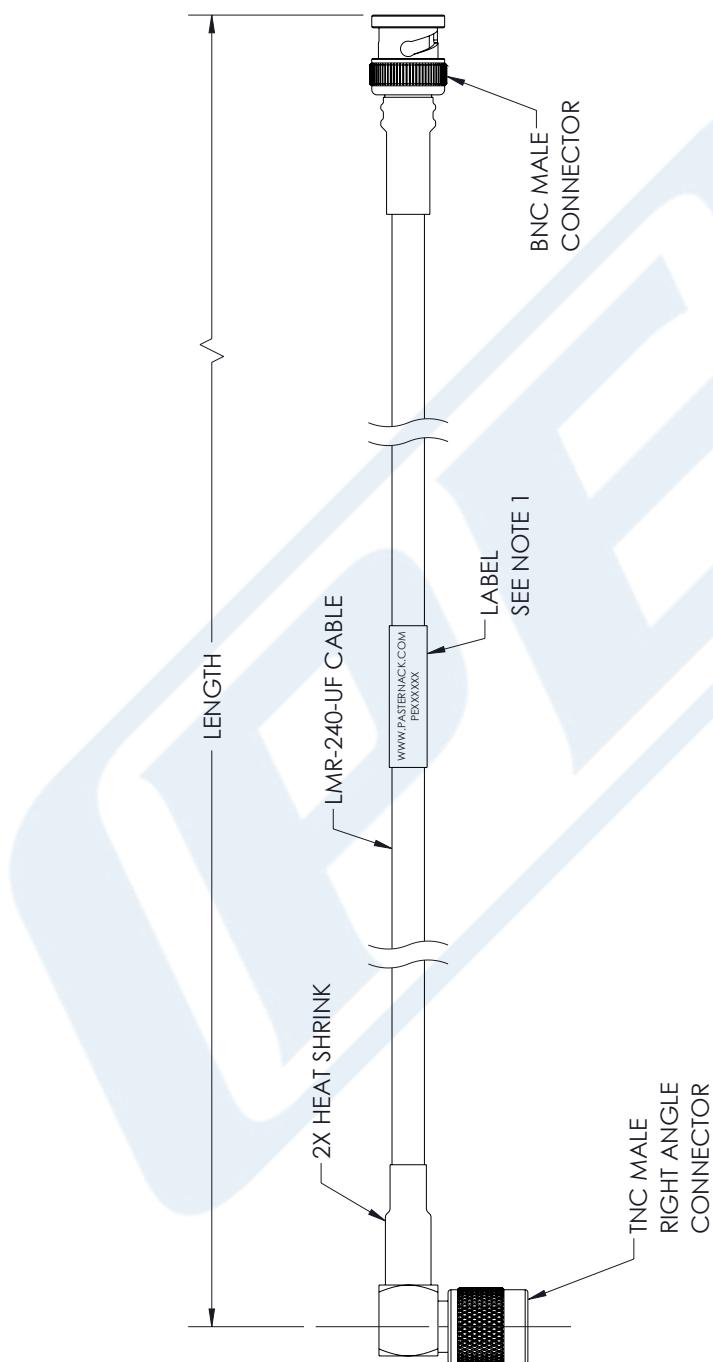

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 34 INCHES TWO LABELS APPROXIMATELY 4 INCHES

DESCRIPTION	TNC Male Right Angle to BNC Male Low Loss Cable Using LMR-240-UF Coax with HeatShrink										
ITEM NO.	PE3W07205/HS										
REV	A										
Phone:	1.866.721.8316 1.949.261.1920										
NONL	1 OR 1										
STLRSSES:	<table border="1"> <tr> <td>5] = +1 [25] -0</td> <td>5] = -2 [51] -0</td> <td>5] = +4 [152] -0</td> <td>5] = +6 [152] -0</td> </tr> <tr> <td>5] = +1 [25] -0</td> <td>5] = -2 [51] -0</td> <td>5] = +4 [152] -0</td> <td>5] = +5 [50] -0</td> </tr> </table>			5] = +1 [25] -0	5] = -2 [51] -0	5] = +4 [152] -0	5] = +6 [152] -0	5] = +1 [25] -0	5] = -2 [51] -0	5] = +4 [152] -0	5] = +5 [50] -0
5] = +1 [25] -0	5] = -2 [51] -0	5] = +4 [152] -0	5] = +6 [152] -0								
5] = +1 [25] -0	5] = -2 [51] -0	5] = +4 [152] -0	5] = +5 [50] -0								
REFERENCE ONLY WITHOUT NOTICE.	SIZE	CAGE CODE	DRAWN BY								
	A	53919	BUCHASKI								

T-Rev.D2