



SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax

RF Cable Assemblies Technical Data Sheet


PE3W07448

Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male Right Angle
- Cable Type: PE-SR405FL

Features

- Max Frequency 12.4 GHz
- 69.5% Phase Velocity

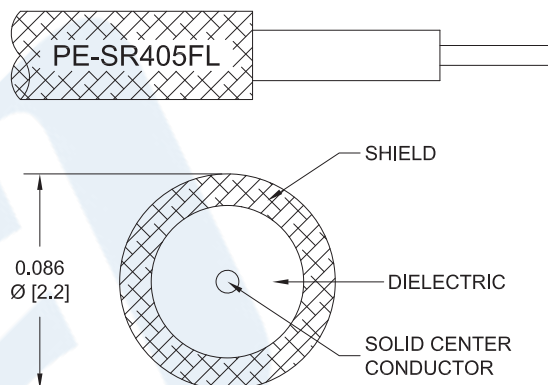

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07448 SMA male to SMA male right angle cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm formable PE-SR405FL coax. The PE3W07448 SMA male to SMA male cable assembly operates to 12.4 GHz. The right angle SMA interface on the PE-SR405FL cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax PE3W07448](#)



SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W07448

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ω/1000ft [Ω/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	12.4	GHz
Insertion Loss (Typ.)	0.15	0.225	0.346	0.549	0.905	dB/ft
	0.49	0.74	1.14	1.8	2.97	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 for SMA Right Angle Male connector and 0.04 xSQRT(FGHz) db for SMA Straight Male connector.

Mechanical Specifications

Cable Assembly

Weight 0.034 lbs [15.42 g]

Cable

Cable Type PE-SR405FL
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Outer Conductor Material and Plating Copper, Tin
 Repeated Minimum Bend Radius 0.78 in [19.81 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax PE3W07448](#)



SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W07448

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male Right Angle
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	ASTM-B488	50 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Beryllium Copper, Gold	Stainless Steel, Gold
Body Plating Specification	ASTM-B488	30 µin minimum
Coupling Nut Material and Plating	Steel	Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum
Hex Size		5/16 inch
Torque	7 in-lbs [0.79 Nm]	3 in-lbs [0.34 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax PE3W07448](#)



SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W07448

How to Order

Part Number Configuration:

PE3W07448

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W07448-12 = 12 inches long cable
PE3W07448-100cm = 100 cm long cable


SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax PE3W07448](https://www.pasternack.com/sma-male-to-sma-male-cable-using-pe-sr405fl-pe3w07448-p.aspx)

URL: <https://www.pasternack.com/sma-male-to-sma-male-cable-using-pe-sr405fl-pe3w07448-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W07448 CAD Drawing
SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax

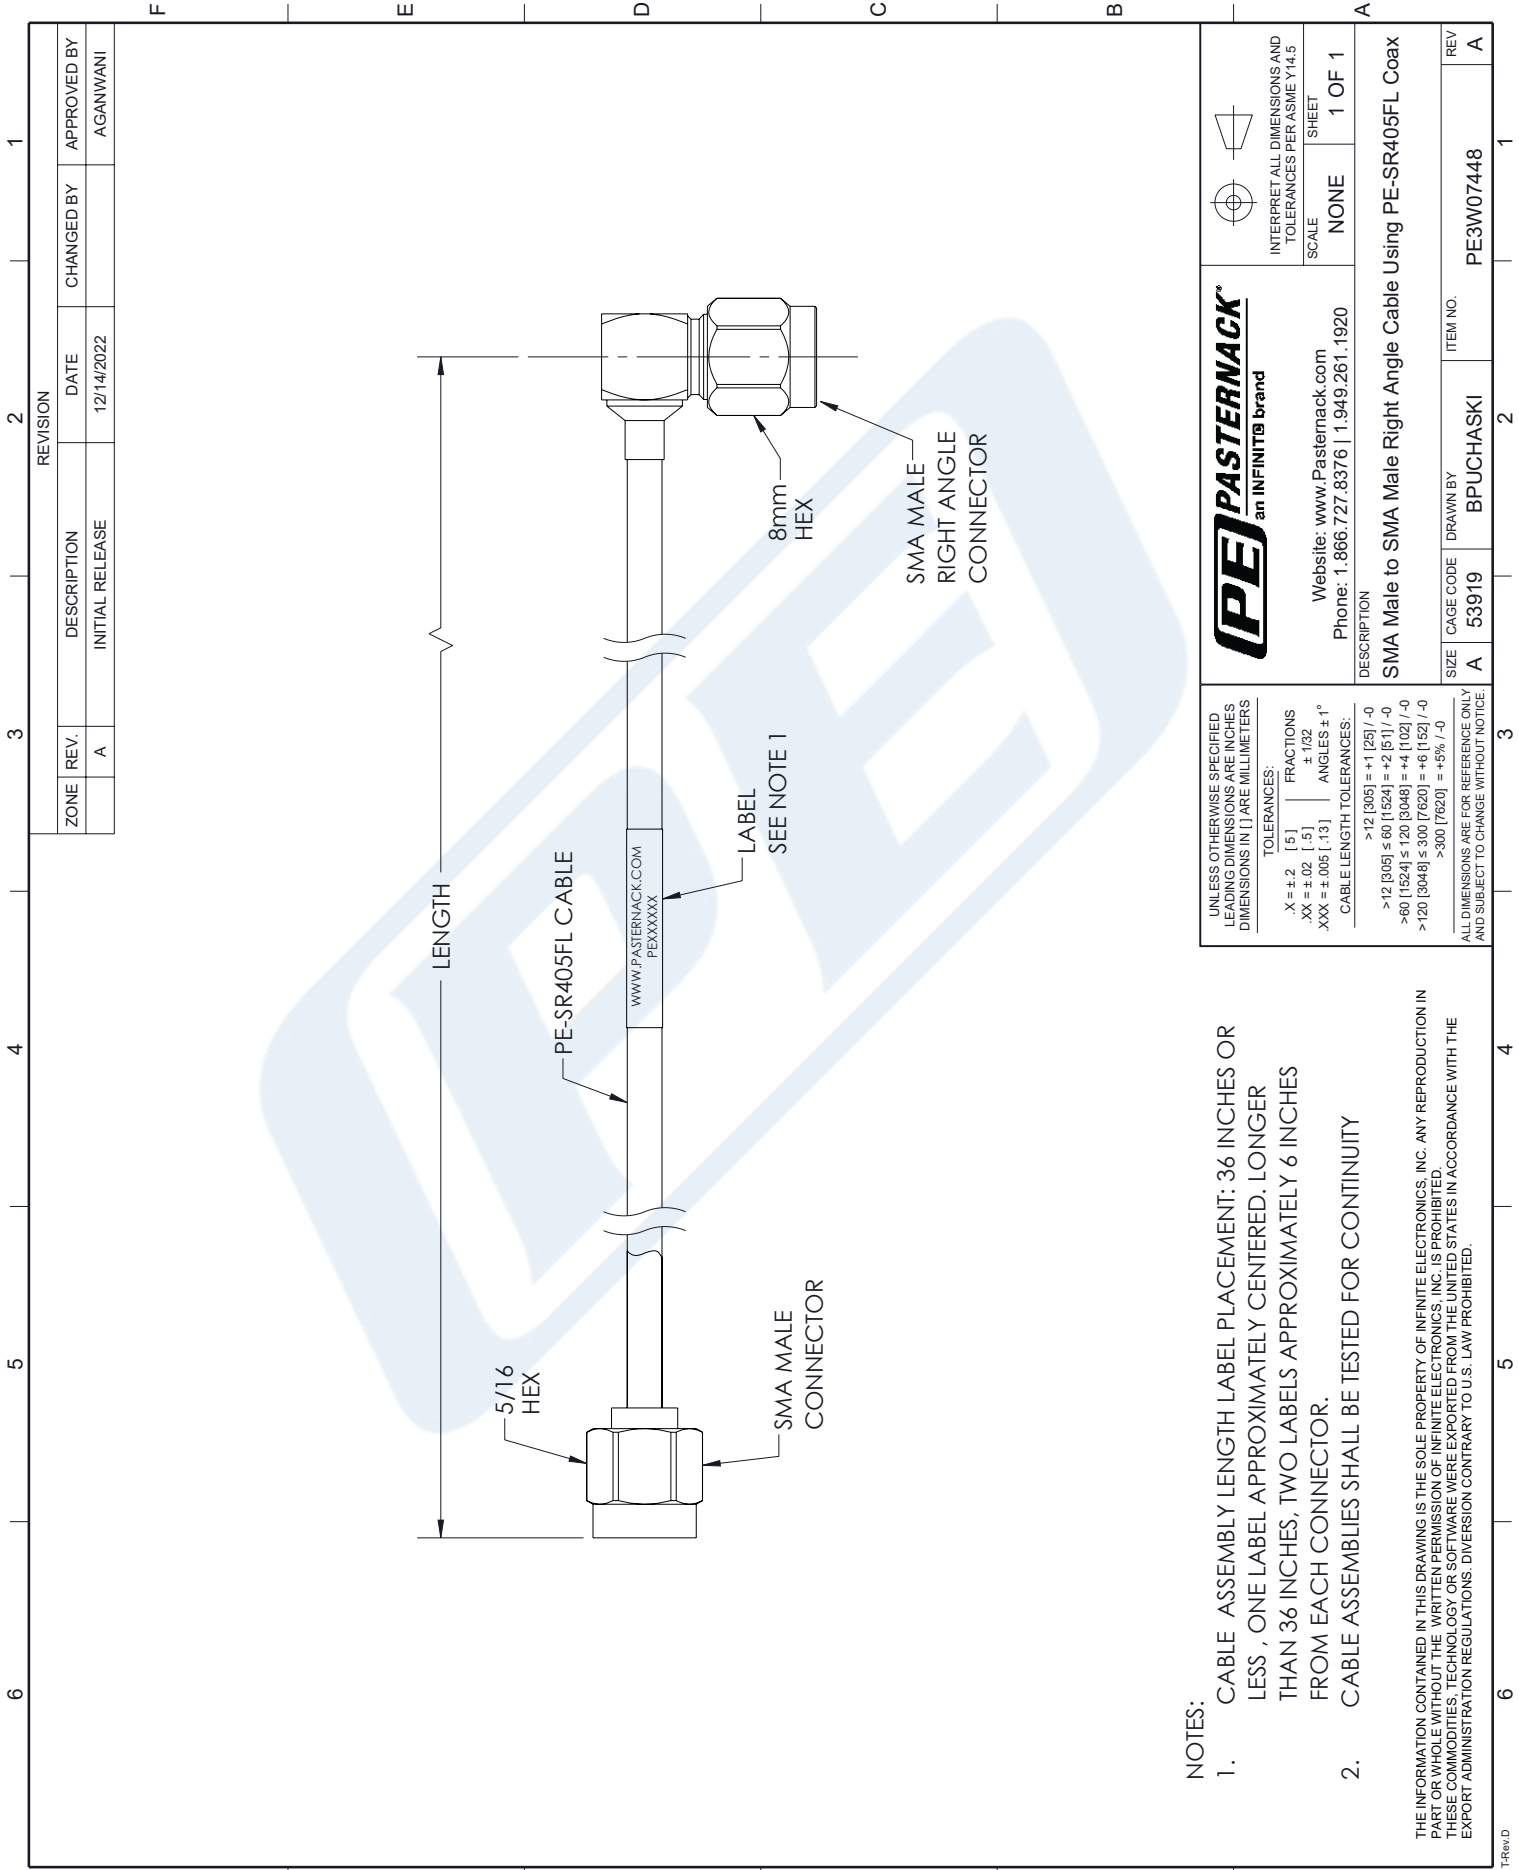

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS , ONE LABEL APPROXIMATELY CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES FROM EACH CONNECTOR.
2. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PE PASTERNAK an INFINITO brand		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920		SCALE NONE	SHEET 1 OF 1
DESCRIPTION SMA Male to SMA Male Right Angle Cable Using PE-SR405FL Coax			
SIZE A	CAGE CODE 53919	DRAWN BY BPUCHASKI	ITEM NO. PE3W07448
REV A		REV A	