



TNC Male Right Angle to SMA Male Low Loss
Cable Using LMR-240-UF Coax

RF Cable Assemblies Technical Data Sheet


PE3W07504

Configuration

- Connector 1: TNC Male Right Angle
- Connector 2: SMA Male
- Cable Type: LMR-240-UF

Features

- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- TPE Jacket

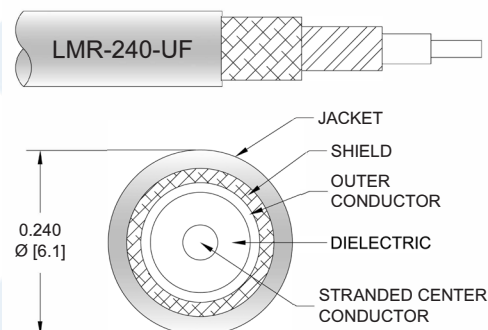

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07504 TNC male right angle to SMA male cable using LMR-240-UF coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to SMA cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240-UF coax. The right angle TNC interface on the LMR-240-UF cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax PE3W07504](#)



TNC Male Right Angle to SMA Male Low Loss
Cable Using LMR-240-UF Coax

RF Cable Assemblies Technical Data Sheet

PE3W07504

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		84		%
RF Shielding	90			dB
Group Delay		1.21 [3.97]		ns/ft [ns/m]
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		4.28 [14.04]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		3.89 [12.76]		Ω/1000ft [Ω/Km]
Jacket Spark			5,000	Vrms

Mechanical Specifications

Cable Assembly

Weight 0.103 lbs [46.72 g]

Cable

Cable Type	LMR-240-UF
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	TPE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]
Bending Moment	0.13 lbs-ft [0.18 N-m]
Flat Plate Crush	13 lbs/in [0.23 Kg/mm]
Tensile Strength	80 lbs [36.29 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax PE3W07504](#)



TNC Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax

RF Cable Assemblies Technical Data Sheet

PE3W07504

Connectors

Description	Connector 1	Connector 2
Type	TNC Male Right Angle	SMA Male
Specification		MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification		ASTM B488
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Passivated Stainless Steel
Body Plating Specification		SAE-AMS-2700
Coupling Nut Material and Plating	Brass, Nickel	Passivated Stainless Steel
Coupling Nut Plating Specification		SAE-AMS-2700

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax PE3W07504](#)



TNC Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax

RF Cable Assemblies Technical Data Sheet

PE3W07504

How to Order

Part Number Configuration:

PE3W07504

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W07504-12 = 12 inches long cable
PE3W07504-100cm = 100 cm long cable

TNC Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax PE3W07504](#)

URL: <https://www.pasternack.com/tnc-male-right-angle-to-sma-male-low-loss-cable-using-lmr-240-uf-pe3w07504-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W07504 CAD Drawing

TNC Male Right Angle to SMA Male Low Loss Cable Using LMR-240-UF Coax

