

N Male to UHF Male Cable Using RG213 Coax





PE3W07986

Configuration

- Connector 1: N Male
- Connector 2: UHF Male
- Cable Type: RG213
- Coax Flex Type: Flexible

Features

- Max Frequency 300 MHz
- 66% Phase Velocity
- PVC Jacket

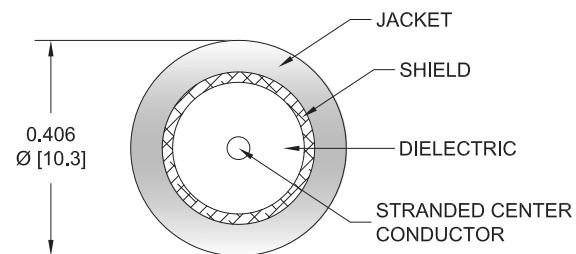

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07986 type N male to UHF male cable is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to UHF cable assembly has a male to male gender configuration with 50 ohm flexible RG213 coax. The PE3W07986 type N male to UHF male cable assembly operates to 300 MHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		300	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Specifications by Frequency

N Male to UHF Male Cable Using RG213 Coax



PE3W07986

Part Number	Length	Description	F1	F2	F3	F4	Units MHz	Weight (lbs)
		Frequency	50	100	250	300		
PE3W07986	Custom Lengths Available	Insertion Loss (Typ.)	0.011	0.022	0.03	0.036	dB/ft	
			0.04	0.08	0.1	0.12	dB/m	
PE3W07986-24	24 inch	Insertion Loss (Typ.)	0.63	0.65	0.66	0.68	dB	0.359
PE3W07986-36	36 inch	Insertion Loss (Typ.)	0.64	0.67	0.69	0.71	dB	0.46
PE3W07986-48	48 inch	Insertion Loss (Typ.)	0.65	0.69	0.72	0.75	dB	0.561
PE3W07986-60	60 inch	Insertion Loss (Typ.)	0.66	0.71	0.75	0.78	dB	0.662
PE3W07986-72	72 inch	Insertion Loss (Typ.)	0.67	0.74	0.78	0.82	dB	0.763

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.1 dB
Loss due to Connector 2: 0.5 dB
Base Weight: 0.257 pounds
Additional Weight per Inch: 0.00842 pounds

Mechanical Specifications

Cable Assembly

Weight 0.257 lbs [116.57 g]

Cable

Cable Type	RG213
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.405 in [10.29 mm]
Repeated Minimum Bend Radius	1.6 in [40.64 mm]

N Male to UHF Male Cable Using RG213 Coax



PE3W07986

Connectors

Description	Connector 1	Connector 2
Type	N Male	UHF Male
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 μ in minimum	30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 μ in minimum	100 μ in minimum

Environmental Specifications

Operating Range Temperature -25 to +70 deg C

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:

N Male to UHF Male Cable Using RG213 Coax

**PE3W07986****Typical Performance Data****How to Order**

Part Number Configuration:

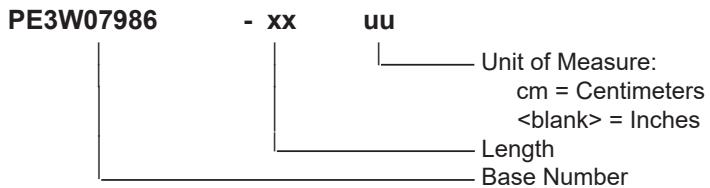

Example: PE3W07986-12 = 12 inches long cable
PE3W07986-100cm = 100 cm long cable

N Male to UHF Male Cable Using RG213 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to UHF Male Cable Using RG213 Coax PE3W07986](#)

URL: <https://www.pasternack.com/n-male-to-uhf-male-cable-using-rg213-pe3w07986-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W07986 CAD Drawing

N Male to UHF Male Cable Using RG213 Coax

