

BNC Male to Push-On SMP Female Right Angle Cable Using RG316 Coax with HeatShrink, LF Solder




PE3W08074LF/HS

Configuration

- Connector 1: BNC Male
- Connector 2: Push-On SMP Female Right Angle
- Cable Type: RG316
- Coax Flex Type: Flexible

Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

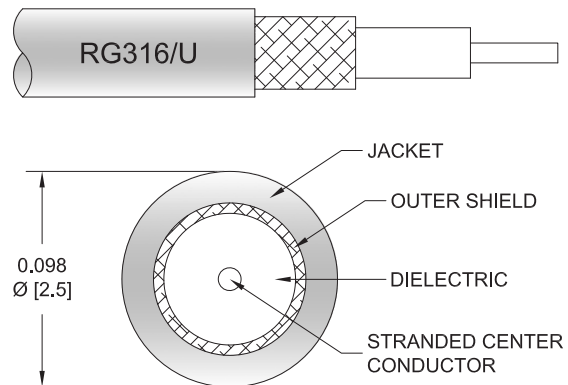

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W08074LF/HS BNC male to SMP female push-on right angle cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to SMP cable assembly has a male to female gender configuration with 50 ohm flexible RG316 coax. The PE3W08074LF/HS BNC male to SMP female cable assembly operates to 3 GHz. The right angle SMP interface on the RG316 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Operating Voltage (AC)			335	Vrms
Jacket Spark			2,000	Vrms

Specifications by Frequency

BNC Male to Push-On SMP Female Right Angle Cable
Using RG316 Coax with HeatShrink, LF Solder



PE3W08074LF/HS

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		100	250	500	1000	
PE3W08074LF/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.11	0.16	0.24	0.38	0.58	dB/ft	
			0.37	0.53	0.79	1.25	1.91	dB/m	
PE3W08074LF/HS-12	12 inch	Insertion Loss (Typ.)	0.41	0.46	0.54	0.68	0.88	dB	0.045
PE3W08074LF/HS-24	24 inch	Insertion Loss (Typ.)	0.52	0.62	0.78	1.06	1.46	dB	0.056
PE3W08074LF/HS-36	36 inch	Insertion Loss (Typ.)	0.63	0.78	1.02	1.44	2.04	dB	0.066
PE3W08074LF/HS-48	48 inch	Insertion Loss (Typ.)	0.74	0.94	1.26	1.82	2.62	dB	0.076
PE3W08074LF/HS-72	72 inch	Insertion Loss (Typ.)	0.96	1.26	1.73	2.58	3.78	dB	0.096

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.045 pounds
Additional Weight per Inch:	0.00084 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.0345 lbs [15.65 g]

Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

BNC Male to Push-On SMP Female Right Angle Cable
Using RG316 Coax with HeatShrink, LF Solder



PE3W08074LF/HS

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	SMP Female Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Connection Method		Push-On
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	50 μin minimum	30μ in. minimum
Dielectric Type	PTFE	Teflon
Outer Conductor Material and Plating		Beryllium Copper, Gold
Outer Conductor Plating Specification		3μ in. minimum
Body Material and Plating	Brass, Nickel	Brass, Gold
Body Plating Specification	100 μin minimum	3μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 μin minimum	

Environmental Specifications

Operating Range Temperature -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

BNC Male to Push-On SMP Female Right Angle Cable Using RG316 Coax with HeatShrink, LF Solder



PE3W08074LF/HS

Typical Performance Data

How to Order

Part Number Configuration:

PE3W08074LF/HS - xx uu



Example: PE3W08074LF/HS-12 = 12 inches long cable
PE3W08074LF/HS-100cm = 100 cm long cable

BNC Male to Push-On SMP Female Right Angle Cable Using RG316 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Push-On SMP Female Right Angle Cable Using RG316 Coax with HeatShrink, LF Solder PE3W08074LF/HS](#)

URL: <https://www.pasternack.com/bnc-male-to-push-on-smp-female-cable-using-rg316-with-heatshrink-lf-solder-pe3w08074lf-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W08074LF/HS CAD Drawing

BNC Male to Push-On SMP Female Right Angle Cable Using RG316 Coax with HeatShrink, LF Solder

